



SATA® has been the fastest growing premium-quality mechanics' hand tool company globally over the last 20 years. Our selection of products is designed and manufactured to serve professional mechanics as well as manufacturing and assembly technicians in a variety of industries including automotive, manufacturing, construction and aerospace.





We challenge the status quo by delivering world-class quality, industry-leading innovation, and a highly gratifying experience with our brand.

SATA® tools meet or exceed ANSI and DIN standards. SATA® tool manufacturing facilities are ISO 9001 certified and Apex Tool Group provides Lifetime Warranty on SATA® tools.

SATA® is part of the umbrella company Apex Tool Group, LLC. The Apex Tool Group works collaboratively with distributors, retailers and large customers across the globe to make sure end users have the tools they need to solve real-world problems.

SATA® tools are your ideal choice!

THE SATA® PROMISE



TRUSTED BRAND MADE TO CHALLENGE

SATA® is the fastest growing hand tool company – trusted by professionals globally.



WORLD CLASS QUALITY AND PERFORMANCE

Professionals count on SATA®'s high quality, innovation and world-class service.



A TOOL FOR EVERY JOB

From simple to unique projects, SATA® has the tools to get every job done.



LIFETIME WARRANTY

All SATA® Products will be repaired/replaced free of charge at SATA®'s discretion.





SATA® is part of the umbrella company Apex Tool Group, LLC. With 7.500 employees in over 30 countries and an annual turnover of more than USD 1,3 billion, the Apex Tool Group, headquartered in Sparks, Maryland, is a leading global manufacturer and supplier of high-performance hand and power tools, tool storage, drill chucks, chain and electrical soldering products for industrial, commercial and demanding do-it-yourself applications.

ATG designs, manufactures, markets, and sells proprietary brands, including GEARWRENCH®, Crescent®, SATA®, Cleco®, Weller®, and APEX® and also designs and manufactures a number of private label tool brands for retailers. ATG sells its products through direct, retail, professional and trade channels to customers in over 115 countries, and serves a multitude of global markets, including automotive, aerospace, electronics, energy, hardware, industrial, and consumer retail.

Learn more at www.apextoolgroup.com.

Our portfolio of innovative brands includes:



GW GEARWRENCH

CRESCENT CRESCENT WISS

CRESCENT CRESCENT NICHOLSON°

Cleco APEX





Content

| 08 | Tool Storage | 8 |
|-----|-------------------------------------|--|
| 34 | General Tool Sets | |
| 46 | Ratchets, Sockets & Drive Tools | Allool |
| 96 | Pass-Thru® Ratchet & Socket Systems | |
| 98 | BoltBiter | |
| 102 | Impact Sockets | |
| 118 | Wrenches | |
| 146 | Ratcheting Wrenches | 3 |
| 170 | Torque Wrenches | |
| 172 | Pliers & Crimping Tools | |
| 190 | Cutters & Snips | |
| 220 | Screwdrivers & Nut Drivers | |
| 244 | Hex Keys | |
| 256 | Striking & Struck | Communication of the communica |
| 266 | Industrial Work Lights | |
| 274 | Measuring | |
| 286 | Auto Speciality Tools | |
| 312 | Other Tools | |
| | | |



























ST95442

FLEX MAT



Versatile compartments



Will not scratch work surface



Non-slip material



Flexible mat material



Easy to clean



Multi-purpose application









Flex Mat

- Versatile compartments keep your tools handy and visible
- Soft Silicon material will not scratch or mar work surface
- Non-slip material ensures mat stays in place
- Flexible mat material bends to any work surface
- Stain resistance makes it easy to clean
- Multi-purpose application improves efficiency





17" 5 Tray Cantilever Tool Box

- All steel constructed tool box opens to 3-tiers with 5 durable trays for stroage and organization
- Dual opening cantilever design allows for quick and easy access to entire tool box
- Equipped with an easy to hold rounded steel handle for comfort and reduced user fatigue
- Manufactured from heavy gauge sheet steel with powder coated finsish



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95104ASC | 430.0 | 200.0 | 200.0 | 1 |

14" Metal Tool Box

- Strong comfortable handle
- Tool box made from heavy gauge sheet steel with powder coated finish
- Galvanized phosphate finish to resist corrosion
- Compact size for convenient carry and storage



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST95101SC | 360.0 | 150.0 | 115.0 | 1 |

16" Metal Tool Box

- Strong comfortable handle
- Tool box made from heavy gauge sheet steel with powder coated finish
- Galvanized phosphate finish to resist corrosion
- Compact size for convenient carry and storage



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95115SC | 420.0 | 155.0 | 120.0 | 1 |

17" & 20" Metal Tool Box

- Sturdy carrying handle with two clip locks on the lid
- Tool box made from heavy gauge sheet steel with powder coated finish
- Galvanized phosphate finish to resist corrosion
- Compact size for convenient carry and storage



| Article Code | Size | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|------|-------------|------------|------------|---|
| ST95102SC | 17" | 428.0 | 177.0 | 184.0 | 1 |
| ST95103ASC | 20" | 508.0 | 218.0 | 243.0 | 1 |

15" & 16" Plastic Tool Box

- Lock and handle made of strong ABS material
- Tool box made of high impact resistant PP material
- ST95162SC: Comes with tool tray for storage and organization





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95161SC | 385.0 | 202.0 | 140.0 | 6 |
| ST95162SC | 385.0 | 225.0 | 203.0 | 6 |

21" Plastic Tool Box

- · Lock and handle made of strong ABS material
- Tool box made of high impact resistant PP material
- Comes with tool tray for storage and organization





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95164SC | 530.0 | 235.0 | 220.0 | 6 |

24" Aluminum Trolley Case

- Double lock structure and anti-shock EVA pad lining for more safety
- Multipurpose tool trays for daily use to organize your tools systematically
- Case is durable, safe and has an impact resistant structure force up to 100 kg (220 lbs), surface panel force up to 50 kg (110 lbs)
- Multipurpose with separators can arbitrarily divide the storage space
- Double lock structure and anti-shock EVR pad lining for more safety





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST03621 | 490.0 | 420.0 | 230.0 | 0 |

13" & 16" Portable Tool Bag

- Waterproof design
- High quality double zipper top
- Reinforced pockets for maximum durability
- Nonslip handles and adjustable padded shoulder straps provide maximum comfort
- Waterproof material resists moisture for long-lasting performance





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|----|
| ST95181 | 330.0 | 215.0 | 250.0 | 10 |
| ST95182SC | 380.0 | 300.0 | 260.0 | 10 |

17" Portable Tool Bag

- Waterproof design
- High quality double zipper top
- Internal and external pockets provide a variety of storage and organization options
- · Reinforced pockets for maximum durability
- Nonslip handles and adjustable padded shoulder straps provide maximum comfort





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|----|
| ST95184SC | 440.0 | 330.0 | 330.0 | 10 |

18" Tool Backpack

- · Backpack style is ideal for everyday, hands-free use
- Integrated handle on the outside of the bag is easy to grab
- Interior and exterior pockets provide a variety of storage and organization options
- Made of durable woven material to withstand even the toughest job site





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95198SC | 350.0 | 200.0 | 450.0 | 6 |

23" Trolley Tool Bag

- Made of 600 denier water-resistant material
- · Reinforced pockets for maximum durability



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95188 | 430.0 | 240.0 | 380.0 | 0 |

4-Pocket Belt Pouch

- Multiple sized pockets offer a variety of storage and organization options
- Constructed with 900-denier nylon construction for maximum strength and durability





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | |
|--------------|-------------|------------|----|
| ST95211 | 235.0 | 110.0 | 10 |

8-Pocket Belt Pouch

- Multiple sized pockets offer a variety of storage and organization options
- Constructed with 900-denier nylon construction for maximum strength and durability





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | 6 |
|--------------|-------------|------------|----|
| ST95213SC | 320.0 | 250.0 | 10 |

1 Drawer Utility Cart 33"

- Cart body made of 1.2 mm thickness steel for strength and durability
- Bottom storage tray is ideal for storing larger items
- Top storage tray is ideal for storing commonly used tools and equipment
- Two swivel (with stopper) and two fixed casters with pin rolling bears
- Drawer load capacity 35 kg
- Total load capacity 150 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST95108SC | 841.0 | 414.0 | 827.0 | 1 |

2 Drawer Utility Cart 38"

- Cart body made of 1.2 mm thickness steel for strength and durability
- Easy lid opening and closing with gas charged lift support struts
- Foldable side table for convenience and space saving
- 5" heavy-duty casters; 2 fixed and 2 locking swivel
- Screwdriver compartment for easy convenient storage
- Recessed 'through holes' allow for the secure storage of extra long items like pry bars
- Bottom storage tray is ideal for storing larger items
- Drawer load capacity 35 kg
- Total load capacity 150kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95118SC | 880.0 | 416.0 | 1029.0 | 1 |

4 Drawer Tool Cart

- Durable PVC handle for comfortable grip
- Cart body made of 1.2 mm thickness steel for strength and durability
- · Easy lid opening and closing with gas charged lift support struts
- Bottom storage tray is ideal for storing larger items
- 5" heavy-duty casters; 2 fixed and 2 locking swivel
- Drawer load capacity 35 kg, total load capacity 240 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|----------|
| ST95119SC | 877.0 | 549.0 | 1015.0 | 1 |

4 Drawer Roller Cabinet 27"

- Durable aluminum alloy handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- · High durability roller tracks enable smooth sliding
- Bottom storage compartment with doors is ideal for storing larger items
- Two swivel and two fixed casters with pin rolling bears
- 5" heavy-duty casters
- Drawer load capacity 35 kg, total load capacity 240 kg
- Drawer size 577 x 404 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95125 | 692.0 | 468.0 | 840.0 | 1 |

Mini Roller Cabinet 30"

- Open top tray for easy tools placement
- Shuttle door for easy opening/closing
- See-through net structure on side panels
- Total load capacity 100 kg
- Drawer load capacity 35 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95111SC | 635.0 | 390.0 | 800.0 | 1 |

5 Drawer Roller Cabinet 28"

- · Four clipped corner design for better strength and durability
- Equipped with EVA foam liners for each drawer and a EVA top mat for convinent storage and tool protection
- 45 mm ball bearing slide for exceptional load capacity
- Comes with an aluminium handle providing resistance protection and ease to transport the cabinet
- Durable powder coated finish protects against scratches and marring
- 5" heavy duty casters for smooth running and durability
- Gray color matted surface powder coatings for better scratch resistant
- Drawer load capacity 35 kg, total load capacity 200 kg
- Drawer size 570 x 375 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95121 | 770.0 | 470 .0 | 896.0 | 1 |

6 Drawer Roller Cabinet 27"

- Durable aluminum alloy handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- · High durability roller tracks enable smooth sliding
- Two swivel and two fixed casters with pin rolling bears
- 5" heavy-duty casters
- Drawer load capacity 35 kg, total load capacity 240 kg
- Drawer size 577 x 404 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST95126 | 692.0 | 468.0 | 840.0 | 1 |

7 Drawer Roller Cabinet 31"

- Durable PVC handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- Screwdriver compartment for easy convenient storage
- · High durability roller tracks enable smooth sliding
- Two swivel (with stopper) and two fixed casters with pin rolling bears
- Drawer load capacity 35 kg
- Total load capacity 240 kg
- Drawer size 570 x 375 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST95107SC | 780.0 | 550.0 | 1180.0 | 1 |

8 Drawer Roller Cabinet 45"

- Durable PVC handle for comfortable grip
- 1.2 mm thickness steel body for strength and durability
- High durability roller tracks enable smooth sliding
- Two swivel (with stopper) and two fixed casters with pin rolling bears
- Drawer load capacity 35 kg
- Total load capacity 240 kg



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST95109SC | 1035.0 | 457.0 | 897.0 | 1 |

168 Pc. Tool Storage and Tray Set with Tool Trolley

CONTENTS:

ST09901SJ - 66 Pc. 1/4" Drive 6 Point Metric Socket Tray Set ST09903SJ - 27 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

ST09904-02-10 Pc. Metric Open End and Combination Ratcheting Wrench Tray Set

 $\ensuremath{\mathsf{ST09906}}$ - 30 Pc. Metric Combination Wrench and Hex Key Tray Set

ST09907 - 8 Pc. Metric Combination Wrench Tray Set ST09909-02-5 Pc. Adjustable Wrench and Pliers Tray Set

ST09911SJ - 4 Pc. Snap Ring Pliers Tray Set

ST09912SJ - 4 Pc. Pliers Tray Set

ST09913SJ - 13 Pc. Combination Screwdriver Tray Set

ST95121 - 5 Drawer Roller Cabinet 28"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09927 | 770.0 | 470.0 | 896.0 | 1 |



ST09927 ST09928

168 & 300 PC. TOOL STORAGE AND TRAY SET WITH TOOL TROL



Contains tools needed for most ratchet repairs



Ouick release



Sockets feature off-corner loading



Ratcheting box end



Precise fit



High performance steel





300 Pc. Tool Storage and Tray Set with Tool Trolley

CONTENTS:

ST09901SJ - 66 Pc. 1/4" Drive 6 Point Metric Socket Tray Set

ST09902SJ - 33 Pc. 3/8" Drive 6 Point Metric Socket Tray Set

ST09903SJ - 27 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

ST09904-02- 10 Pc. Metric Open End and Combination Ratcheting Wrench Tray Set

ST09905 - 10 Pc. Metric Offset Box End Wrench Tray Set

ST09906 - 30 Pc. Metric Combination Wrench and Hex Key Tray Set

ST09907 - 8 Pc. Metric Combination Wrench Tray Set ST09909-02- 5 Pc. Adjustable Wrench and Pliers Tray Set

ST09910 - 8 Pc. File Tray Set

ST09911SJ - 4 Pc. Snap Ring Pliers Tray Set

ST09912SJ - 4 Pc. Pliers Tray Set

ST09913SJ - 13 Pc. Combination Screwdriver Tray Set

ST09914SJ - 36 Pc. 3/8" and 1/2" Drive 6 Point Metric Impact Socket Tray Set

ST09915SJ - 26 Pc. 1/2" Drive 6 Point Metric Socket

Tray Set ST08028 - 19 Pc. Metr

 - 19 Pc. Metric Double Ratcheting Combination Wrench Tray Set

ST95107SC - 7 Drawer Roller Cabinet 31"





Please refer to the warranty terms of the individual product

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09928 | 780.0 | 550.0 | 1180.0 | 1 |

66 Pc. 1/4" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 1 Quick-Release Ratchet
- 14 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 12 6pt. Metric Deep Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm
- 23 Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Pozidriv #1, #2, #3 Torx® T8, T10, T15, T20, T25, T27, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm
- 8 25L Bits Phillips #0, #1, #2, #3; Slotted 3, 4, 5, 6 mm
- 8 Accessories Spinner Handle Wobble Extension Bars 2", 4" Flex Extension Bar 6" T-Handle Universal Joint Magnetic Quick-Release Bit Holder Bit Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09901SJ | 375.0 | 185.0 | 45.0 | 4 |

33 Pc. 3/8" Drive 6 Point Metric Socket Tray Set

- 1 Quick-Release Ratchet
- 15 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm
- 8 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15, 17, 19 mm
- 3 Spark Plug Sockets 16, 18, 21 mm
- 6 Accessories
 Wobble Extension 10"
 3/8"F x1/4"M Adapter
 Universal Joint
 Bit Adapter
 Locking Extension Bar 3"
 1/2"F x 3/8"M 3-Way Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09902SJ | 375.0 | 185.0 | 45.0 | 4 |

27 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 1 Quick-Release Ratchet
- 17 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32, 34 mm
- 5 6pt. Metric Deep Sockets 10, 13, 17, 19, 22 mm
- 4 Accessories Wobble Extension Bar 10" Universal Joint Locking Extension Bar 5" 3/8"Fx1/2"M 3-Way Adapter




| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09903SJ | 375.0 | 185.0 | 45.0 | 4 |

26 Pc. 1/2" Drive 6 Point Metric Socket Tray Set

CONTENTS:

- 20 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 5 6pt. Metric Deep Sockets 14, 17, 19, 21, 24 mm
- 1 Quick-Release Ratchet

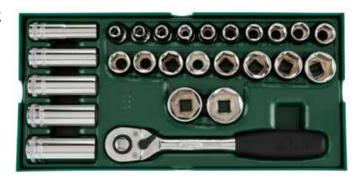

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09915SJ | 375.0 | 185.0 | 45.0 | 4 |

29 Pc. 3/8" Drive 6 Point SAE Socket Tray Set

- 11 6pt. SAE Sockets 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
- 9 6pt. SAE Deep Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8"
- 2 Spark Plug Sockets 5/8, 13/16"
- 7 Accessories
 Quick-Release Ratchet
 Wobble Extension 10"
 Locking Extension 3"
 Universal Joint
 3/8"Fx1/4"M Adapter
 Bit Adapter
 1/2"Fx3/8"M 3-Way Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09934 | 375.0 | 185.0 | 45.0 | 4 |

25 Pc. 1/2" Drive 6 Point SAE Socket Tray Set

CONTENTS:

- 15 6pt. SAE Sockets 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4"
- 5 6pt. SAE Deep Sockets 1/2, 9/16, 5/8, 3/4, 13/16"
- 5 Accessories Quick-Release Ratchet Wobble Extension 10" Locking Extension 5" Universal Joint 3/8"Fx1/2"M 3-Way Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09528 | 375.0 | 185.0 | 45.0 | 4 |

10 Pc. Metric Open End and Combination Ratcheting Wrench Tray Set

CONTENTS:

- 2 Ratcheting Combination Wrenches 13, 14 mm
- 8 Double Open End Wrenches 6x7, 8x10, 10x12, 11x13, 12x14, 22x24, 24x27, 30x32 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09904-02 | 375.0 | 185.0 | 45.0 | 4 |

10 Pc. Metric Offset Double Box End Wrench Tray Set

CONTENTS:

6 x 7, 8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 21 x 23, 24 x 27 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09905 | 375.0 | 185.0 | 45.0 | 4 |

30 Pc. Metric Combination Wrench and Hex Key Tray Set

CONTENTS

- 12 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 9 Extra Long Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- 9 Long Arm Tamper-Proof Torx® Key Set T10, T15, T20, T25, T27, T30, T40, T45, T50



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09906 | 375.0 | 185.0 | 45.0 | 4 |

8 Pc. Metric Combination Wrench Tray Set

CONTENTS:

5.5, 6, 7, 20, 21, 22, 23, 24 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST09907 | 375.0 | 185.0 | 45.0 | 4 |

19 Pc. Metric Combination Ratcheting Wrench Tray Set

- 15 Ratcheting Combination Wrenches 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 1 Quick Release Adapter 1/4" Dr. 10 mm
- 1 Quick Release Adapter 3/8" Dr. 13 mm
- 1 Quick Release Adapter 1/2" Dr. 19 mm
- 1 Bit Adapter 1/4" Dr. 10 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST09908 | 375.0 | 185.0 | 45.0 | 4 |

19 Pc. Metric Double Ratcheting Combination Wrench Tray Set

CONTENTS:

- 15 Double Ratcheting Combination Wrenches 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 1 1/4" Dr. x10 mm Quick Release Adapter
- 1-3/8" Dr.x13 mm Quick Release Adapter
- 1 1/2" Dr. x19 mm Quick Release Adapter
- 1 1/4" Dr. x10 mm Bit Adapter



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST08028 | 375.0 | 185.0 | 45.0 | 4 |

27 Pc. SAE Combination Wrench Tray Set

CONTENTS:

- 9 Combination Wrenches 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4"
- 1 9 Pc. Extra Long Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm
- 1 9 Pc.Long Arm Tamper-Proof Torx® Key Set T10, T15, T20, T25, T27, T30, T40, T45, T50



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST08034E | 375.0 | 185.0 | 45.0 | 4 |

5 Pc. Adjustable Wrench and Pliers Tray Set

- 2 Adjustable Wrenches 8", 10"
- 1 Long Nose Pliers 6"
- 1 Curved Jaw Locking Pliers 7"
- 1 Long Nose Locking Pliers 6"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09909-02 | 375.0 | 185.0 | 45.0 | 4 |

8 Pc. File Tray Set

CONTENTS:

- 1- Flat File 8"
- 1- Half-Round File 8"
- 1- Round File 8"
- 1- Three Square File 8"
- 1- Square File 8"
- 3 140 mm Needle Files Flat, Half Round, Round




Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09910 | 375.0 | 185.0 | 45.0 | 4 |

4 Pc. Snap Ring Pliers Tray Set

CONTENTS:

- 1 External Straight 7"
- 1 External Curved 7"
- 1 Internal Straight 7"
- 1- Internal Curved 7"

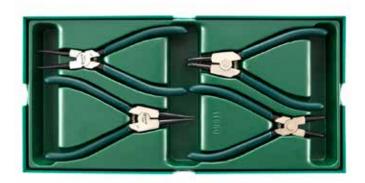

| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST09911SJ | 375.0 | 185.0 | 45.0 | 4 |

4 Pc. Pliers Tray Set

- 1 Long Nose 6"
- 1 Diagonal 6"
- 1- Linesman 8"
- 1 Plastic Flush Cutting 6"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09912SJ | 375.0 | 185.0 | 45.0 | 4 |

13 Pc. Combination Screwdriver Tray Set

CONTENTS:

- 4 Precision Slotted 1.0 x 40 mm, 2.0 x 40 mm, 2.4 x 40 mm, 3.0 x 40 mm
- 2 Precision Phillips #0x40 mm, #3x40 mm
- 3 T-Series Slotted 3x75 mm, 5x75 mm, 6x100 mm
- 4 T-Series Phillips #0 x75 mm, #1 x75 mm, #2 x100 mm, #3 x150 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09913SJ | 375.0 | 185.0 | 45.0 | 4 |

36 Pc. 3/8" and 1/2" Drive 6 Point Metric Impact Socket Tray Set

CONTENTS:

- 16 1/2" Dr. Metric Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm
- 13 3/8" Dr. Metric Impact Sockets 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 1-3/8" Dr. Impact Extension Bar 3"
- 1-1/2" Dr. Impact Extension Bar 6"
- 1-1/4"Fx3/8"M Impact Adapter
- 1 1/2"Fx3/8"M Impact Adapter
- 1 3/8"Fx1/2"M Impact Adapter
- 1-3/4"Fx1/2"M Impact Adapter
- 1 1/2" Dr. Impact Universal Joint



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST09914SJ | 375.0 | 185.0 | 45.0 | 4 |

4 Pc. Striking Tool Tray Set

- 1-5 Pc. Punch Set
- 1 32 Pc. Feeler Gauge Set
- 1 Hickory Ball Pein Hammer 24 oz
- 1 Hickory Soft Face Hammer 35 mm



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| ST09932A | 375.0 | 185.0 | 45.0 | 4 |

68 Pc. VDE Tool Set



CONTENTS:

- 2 3/8", 1/2" Drive Insulated Quick-Release Teardrop Ratchets
- 8 3/8" Drive 6 Point VDE Insulated Sockets 8, 10, 12, 13, 14, 16, 17, 18 mm
- 11 1/2" Drive 6 Point VDE Insulated Sockets 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24 mm
- 5 1/2" Drive VDE Insulated Hex Bit Sockets 4, 5, 6, 8, 10 mm
- 13 VDE Insulated Open End Wrenches 8, 10, 12, 13, 14. 15, 16, 17, 18, 19, 21, 22, 24 mm
- 13 VDE Insulated Single Offset Ring Wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm
- 1 VDE Insulated Adjustable Wrench 8"
- 6 T-Series VDE Insulated Screwdriver Phillips #0x60 mm, #1x80 mm, #2x100 mm Slotted 2.5x75 mm, 4.0x100 mm, 5.5x125 mm
- 1 VDE Insulated Long Nose Pliers 8"
- 1 VDE Insulated Diagonal Pliers 7"
- 1 VDE Insulated Linesman Pliers 8"
- 1 VDE Cable Knife
- 2 Accessories
 - 1/2" Drive VDE Insulated T-Handle
 - 1/2" Drive VDE Insulated Wobble Extensions 5", 10"









Fits ST95125 4 Drawer Roller Cabinet 27" and ST95126 6 Drawer Roller Cabinet 27"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| SC09928 | 577.0 | 404.0 | 30.0 | 1 |

187 Pc. Automotive Master Tool Set

- 3 1/4", 3/8", 1/2" Drive Quick-Release Ratchets
- 10 1/4" Drive 6 Point Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm
- 4 1/4" Drive 6 Point Deep Sockets 8, 9, 10, 12 mm
- 9 3/8" Drive 6 Point Sockets 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 4 3/8" Drive 6 Point Deep Sockets 13, 14, 15, 17 mm
- 8 3/8" Drive External Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20
- 3 3/8" Drive Metric Spark Plug Sockets 14, 16, 21 mm
- 7 1/2" Drive 6 Point Sockets 20, 21, 22, 24, 27, 30, 32 mm
- 2 1/2" Drive 6 Point Thin Wall Impact Deep Sockets 17, 19 mm
- 3 3/8" Drive Torx® Bit Sockets T20, T30, T40
- 4 3/8" Drive Tamper-Proof Torx® Bit Sockets T45, T50, T55, T60
- 4 3/8" Drive Hex Bit Sockets 3, 4, 5, 6 mm
- 2 3/8" Drive Pozidriv Bit Sockets #1, #2
- 2 3/8" Drive Phillips Bit Sockets #1, #2
- 2 3/8" Drive Slotted Bit Sockets 5.5, 6.5 mm
- 3 1/4" Drive 25L Bits Slotted 4.0, 5.0, 6.5 mm
- 2 1/4" Drive 25L Bits Phillips #1, #3
- 4 1/4" Drive 25L Bits Hex 3, 4, 5, 6 mm
- 11 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 16, 17, 18, 19 mm
- 5 Flare Nut Wrenches 8 x 10, 9 x 11, 10 x 12, 13 x 14, 16 x 17 mm
- 2 Adjustable Wrenches 8", 10"
- 2 Acetate Go-Through Screwdrivers Slotted 6 x 150 mm Phillips #2x150 mm
- 9 Acetate Screwdrivers Torx® T20x100 mm, T25x100 mm, T30x100 mm Slotted 3.2 x 75 mm, 5 x 100 mm, 6 x 150 mm Phillips #0 x75 mm, #1 x 100 mm, #2 x 150 mm
- 1 10 Pc. Metric Long Hex Key Set
- 1 9 Pc. Tamper-Proof Torx® Key Set
- 1- Long Nose Pliers 6"
- 1- Diagonal Pliers 6"
- 1- Linesman Pliers 8"
- 2 External Snap Ring Pliers, Straight 7", Curved 7"
- 2 Internal Snap Ring Pliers, Straight 7", Curved 7"

- 1- Slip Joint Pliers 8"
- 1 Curved Jaw Locking Pliers 10"
- 1 Wire Stripper Cutting Pliers 6"
- 1 T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 1 Universal 3-law Oil Filter Wrench
- 1 Automotive Circuit Tester 6V/12V/24V
- 1 Shock Absorber Removal Socket
- 1 Plastic Snap-off Knife, 8-point, 18 x 100 mm
- 1 Flexible Magnetic Pick-Up Tool
- 2 Oil Filter Wrenches 55-75 mm, 75-95 mm
- 1- Wood Handle Putty Scrape
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1-5 Pc. Punch Set
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 1/2" Air Impact Wrench
- 1- Low Speed Air Tire Buffer
- 1-5 Pc. Fine Threaded Extractor Set
- 1 Multi-Purpose Scissors 8"
- 1 Mini Digital Multimeter
- 13 Accessories
 - 1/4", 3/8", 1/2" Drive Universal Joints 3/8" Drive Adapter 1/4" 3/8" Drive 3-Way Adapter 1/2" 1/2" Drive 3-Way Adapter 3/8"

 - 1/4" Drive Wobble Extensions 2"
 - 3/8" Drive Wobble Extension 3", 6"
 - 1/2" Drive Wobble Extensions 5", 10" 1/4" Drive Spinner Handle
 - 1/4" Drive Bit Adapter

Not included: Pen Type Dual-lighting Rechargeable LED Work Light











Fits ST95125 4 Drawer Roller Cabinet 27" and ST95126 6 Drawer Roller Cabinet 27"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| SC09946-1 | 577.0 | 404.0 | 30.0 | 1 |

239 Pc. Automotive Master Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Drive Quick-Release Ratchets
- 12 1/4" Drive 6 Point Sockets 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 14 3/8" Drive 6 Point Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 9 3/8" Drive 6 Point Deep Sockets 8, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 10 3/8" Drive External Torx® Socket E4, E5, E6, E7, E8, E10, E11, E12, E14, E16
- 2 3/8" Drive Metric Spark Plug Sockets 16, 21 mm
- 18 1/2" Drive 12 Point Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 2 1/2" Drive 6 Point Thin Wall Impact Deep Sockets 17, 19 mm
- 3 1/4" Drive Phillips Bit Sockets #1, #2, #3
- 3 1/4" Drive Slotted Bit Sockets 4.0, 5.0, 6.5 mm
- 6 1/4" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8 mm
- 7 1/4" Drive Torx® Bit Sockets T8, T10, T15, T20, T25, T30, T40
- 5 3/8" Drive Hex Bit Sockets 5, 6, 7, 8, 10 mm
- 1-3/8" Drive Long Hex Bit Socket 9 mm
- 9 3/8" Drive Torx® Bit Socket T15, T20, T25, T27, T30, T40, T45, T50, T55
- 2 1/2" Drive Triple Square Bit Sockets M10, M12
- 2 1/2" Drive Long Triple Square Bit Sockets M8, M10, M12, M14
- 3 1/2" Drive Hex Bit Sockets 12, 14, 19 mm
- 17 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24 mm
- 4 Deep Offset Double Box End Wrenches 10 x 11, 12 x 13, 16 x 17, 18 x 19 mm
- 6 Flex Head Ratcheting Wrenches 8, 10, 13, 15, 16, 18 mm
- 3 Flare Nut Wrenches 9 x 11, 13 x 14, 16 x 17 mm
- 1 Adjustable Wrench 10"
- 2 Acetate Go-Through Screwdrivers Slotted 6x150 mm Phillips #2x150 mm
- 1 10 Pc. Metric Long Hex Key Set
- 1-9 Pc. Tamper-Proof Torx® Key Set

Slotted 3.2x75 mm, 5x100 mm, 5x300 mm, 6x150 mm

Phillips #0x75 mm, #1x75 mm, #2x150 mm, #2x300 mm

- 1- Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1 Slip Joint Pliers 8"
- 1 Groove Joint Pliers 10"
- 1 Curved Jaw Locking Pliers 10"
- 1 German Style External Snap Ring Pliers, Straight 7"
- 1- German Style Internal Snap Ring Pliers, Straight 7"
- 1- T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 2 End Cap Oil Filter Wrenches 36, 74 mm
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1 Multi-Purpose Scissors 8"
- 1 Flexible Magnetic Pick-Up Tool
- 1 Air Blow Gun 250 mm
- 1 Pry Bars Driver
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x 19 mm
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 Dead Blow Soft Rubber Hammer 55 mm
- 1-5 Pc. Punch Set
- 1-5 Pc. Interior Trims Remover Set
- 1 Plastic Snap-off Knife, 13-point, 9 x 80 mm
- 13 Accessories:

1/4" Drive Spinner Handle 1/4", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4" 3/8" Drive Wobble Extensions 3", 6",10 " 1/2" Drive Wobble Extensions 5", 10"

3/8" Drive Adapter 1/2" 3/8" Drive 3-Way Adapter 1/2"

1/2" Drive Flex Handle / Breaker Bar 15"













Fits ST95126 6 Drawer Roller Cabinet 27"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| SC09947-1 | 577.0 | 404.0 | 30.0 | 1 |

249 Pc. Master Body Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets
- 13 1/4" Drive 6 Point Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 12 3/8" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 13 3/8" Drive 6 Point Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm
- 2 3/8" Drive Metric Spark Plug Sockets 14, 16, 21 mm
- 20 1/2" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 19 Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27 mm
- 1 Adjustable Wrench 10"
- 1-9 Pc. Metric Extra Long Ball Point Hex Key Set
- 1-9 Pc. Tamper-Proof Torx® Key Set
- 2 Acetate Go-Through Screwdrivers Slotted 6 x 150 mm Phillips #2x150 mm
- 8 Acetate Screwdrivers Slotted 3.2x75 mm, 5x100 mm, 6x38 mm, 6x100 mm
 - Phillips #0x75 mm, #1x75 mm, #2x38 mm, #2 x 100 mm
- 5 Drive 30L Bits Slotted 5.5, 6.5, 8, 10, 12 mm
- 1 Drive 70L Long Bit Slotted 8 mm
- 3 Drive 30L Bits Phillips #1, #2, #3
- 1 Drive 70L Long Bit Phillips #2
- 8 Drive 30L Bits Tamper-Proof Torx® T20, T25, T30, T40, T45, T50, T55, T60
- 8 Drive 70L Long Bits Torx® T20, T25, T27, T30, T40, T45, T50, T55
- 5 Drive 30L Bits Triple Square M5, M6, M8, M10, M12
- 7 Drive 70L Long Bits Triple Square M5, M6, M8, M10, M12, M14, M16
- 7 Drive 30L Bits Hex 4, 5, 6, 7, 8, 10, 12 mm
- 8 Drive 70L Long Bits Hex 4, 5, 6, 7, 8, 10, 12, 14 mm
- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1- Slip Joint Pliers 8"
- 1 Curved Jaw Locking Pliers 10"
- 2 German Style External Snap Ring Pliers, Straight 7", Curved 7"
- 2 German Style Internal Snap Ring Pliers, Straight 7", Curved 7"
- 1 Long Nose Locking Pliers 9"
- 1 Welding Clamp Locking Pliers 9"
- 1- Metal Sheet Clamp Locking Pliers 8"
- 1 C-Clamps Locking Pliers 11'

- 1 Flat File 8" Second Cut
- 1- Half Round File 8" Second Cut
- 1 Round File 8" Second Cut
- 1 Triangular File 8" Second Cut
- 1 Diamond Pointed Flat File 3 x 140 mm
- 1 Diamond Pointed Half-Round File 3x140 mm
- 1 Diamond Pointed Round File 3x140 mm
- 1- T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 1 Oil Filter Wrench 63-102 mm
- 1 Automotive Circuit Tester 6V/12V/24V
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1 Flexible Magnetic Pick-Up Tool
- 1 Fiberglass Ball Pein Hammer 680g / 24oz
- 1 Dead Blow Soft Rubber Hammer 55 mm
- 1 Curved Pein and Finishing Hammer
- 1 Straight Pein and Finishing Hammer
- 1 Pick and Finishing Hammer
- 1 Anvil Dolly
- 1 Wedge Dolly
- 1- Toe Dolly
- 1- Pry Bumping Spoon
- 1- Wood Handle Putty Scraper
- 1-5 Pc. Punch Set
- 1 5 Pc. Fine Threaded Tap Extractor Set
- 1 5 Pc. Handy Remover Set
- 1 Air Blow Gun 100 mm
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x19 mm
- 1 Plastic Snap-off Knife, 13-point, 9x80 mm
- 16 Accessories:
 - 1/4", 3/8", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4"
 - 3/8" Drive Wobble Extensions 3", 6"

 - 1/2" Drive Wobble Extensions 5", 10"
 - 1/4" Drive Flex Extension
 - 1/4" Drive Adapter 3/8"
 - 3/8" Drive Adapter 1/2" 1/2" Drive Adapter 3/8"
 - 1/2" Drive OffSet Handle
 - 3/8", 1/2" Drive Bit Adapter 5/16"















Fits ST95126 6 Drawer Roller Cabinet 27"

| Article Code | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|-------------|------------|------------|---|
| SC09930-1 | 577.0 | 404.0 | 30.0 | 1 |

368 Pc. Master Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets
- 13 1/4" Drive 6 Point Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm
- 10 1/4" Drive 6 Point Deep Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm
- 12 3/8" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
- 10 3/8" Drive 6 Point Deep Sockets 8, 9, 10, 11, 12, 13, 14, 15, 17, 19 mm
- 8 3/8" Drive External Torx® Socket E8, E10, E11, E12, E14, E16, E18, E20
- 20 1/2" Drive 6 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30. 32 mm
- 20 1/2" Drive 12 Point Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm
- 14 1/2" Drive 6 Point Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm
- 4 1/2" Drive 12 Point Deep Sockets 10, 12, 17, 19 mm
- 3 3/8" Drive Spark Plug Sockets 14, 16, 21 mm
- 4 1/2" Drive 6 Point Impact Sockets 17, 19, 21, 23 mm
- 3 1/4" Drive Slotted Bit Sockets 4.0, 5.5, 6.5 mm
- 2 3/8" Drive Slotted Bit Sockets 5.5, 6.5 mm
- 3 1/4" Drive Phillips Bit Sockets #1, #2, #3
- 3 3/8" Drive Phillips Bit Sockets #1, #2, #3
- 7 1/4" Drive Torx® Bit Sockets T8, T10, T15, T20, T25, T27, T30, T40
- 9 3/8" Drive Torx® Bit Sockets T10, T15, T20, T25, T27, T30, T40, T45, T50
- 6 1/4" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8 mm
- 7 3/8" Drive Hex Bit Sockets 3, 4, 5, 6, 7, 8, 10 mm
- 23 Combination Wrenches 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 mm
- 13 Double Open End Wrenches 6x7, 8x10, 10x12, 12x14, 13x15, 13x16, 14x17, 16 x 18, 17 x 19, 19 x 21, 22 x 24, 24 x 27, 30 x 32 mm
- 11 Deep Offset Double Box End Wrenches 10 x 12, 12 x 14, 13 x 15, 13 x 16, 14 x 17, 16 x 18, 17 x 19, 19 x 21, 19 x 22, 22 x 24, 24 x 27
- 12 Pipe Wrench 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17 mm
- 1 Adjustable Wrenches 10"
- 1-9 Pc. Metric Extra Long Ball Point Hex Key Set
- 1 9 Pc. Tamper-Proof Torx® Key Set
- 2 Acetate Go-Through Screwdrivers Slotted 6x150 mm, Phillips #2x150 mm
- 8 Acetate Screwdrivers Slotted 3.2x75 mm, 5x100 mm, 6x38 mm, 6x100 mm Phillips #0x75 mm, #1x75 mm, #2x38 mm, #2x100 mm
- 4 Cushion Grip Go-Through Screwdrivers Slotted 8x150 mm, 8x200 mm Phillips #3 x 150 mm, 3 x 200 mm
- 6 Drive 30L Bits Tamper-Proof Torx® T20, T25, T30, T40, T45, T50
- 8 Drive 70L Long Bits Torx® T20, T25, T27, T30, T40, T45, T50, T55
- 5 Drive 30L Bits Triple Square M5, M6, M8, M10, M12
- 5 Drive 70L Long Bits Triple Square M5, M6, M8, M10, M12

- 7 Drive 30L Bits Hex 4, 5, 6, 7, 8, 10, 12 mm
- 7 Drive 70L Long Bits Hex 4, 5, 6, 7, 8, 10 mm
- 1 Long Nose Pliers 6"
- 1 Diagonal Pliers 6"
- 1 Linesman Pliers 8"
- 1 Slip Joint Pliers 8"
- 1 Curved Jaw Locking Pliers 10"
- 2 German Style External Snap Ring Pliers, Straight 7", Curved 7"
- 2 German Style Internal Snap Ring Pliers, Straight 7", Curved 7"
- 1- T52 Engine Cylinder Head Screw Bit Socket
- 1 M16 Oil Pan Drain Bit Socket
- 1 H17 Oil Pan Bit Socket
- 1 Flexible Magnetic Pick-Up Tool
- 1-5 Pc. Interior Trims Remover Set
- 1-5 Pc. Punch Set
- 1-5 Pc. Fine Threaded Tap Extractor Set
- 1 Pry Bars Driver
- 1 Automotive Circuit Tester 6V/12V/24V
- 1 Air Blow Gun 100 mm
- 1 Oil Filter Wrench 63-102 mm
- 1 14 Pc. Feeler Gauge Set 0.05-1.00 mm
- 1- Fiberglass Ball Pein Hammer 680g / 24oz
- 1- Dead Blow Soft Rubber Hammer 55 mm
- 1 Tape Measure Metric/SAE Scale 5 m/16ft x19 mm
- 1 Plastic Snap-off Knife, 13-point, 9 x 80 mm
- 24 Accessories:

1/4" Drive Spinner Handle 1/4", 3,8", 1/2" Drive Universal Joint 1/4" Drive Wobble Extensions 2", 4" 3/8" Drive Wobble Extensions 3", 6", 10" 1/2" Drive Wobble Extensions 5", 10" 1/2" Drive OffSet Handle 1/4", 3,8", 1/2" Drive T-Handle

1/4" Drive Adapter 3/8'

3/8" Drive Adapter 1/4" 3/8" Drive Adapter 1/2"

1/2" Drive Adapter 3/8"

3/8" Drive 3-Way Adapter 1/2' 1/2" Drive 3-Way Adapter 3/8'

3/8" Drive Bit Adapter 5/16


1/2" Drive Bit Adapter 5/16"

1/4" Drive Flex Extension















Fits ST95126 6 Drawer Roller Cabinet 27"

| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| SC09931-1 | 577.0 | 404.0 | 30.0 | 1 |

103 Pc. General Tool Set

CONTENTS:

- 2 1/4", 1/2" Dr. Quick-Release Ratchets
- 7 1/4" Dr. 6pt. Metric Sockets 5, 5.5, 6, 7, 8, 9, 10 mm
- 12 1/2" Dr. 12pt. Metric Sockets 8, 10, 11, 12, 13, 17, 19, 20, 22, 24, 30, 32 mm
- 1 1/2" Dr. 6pt. Metric Deep Socket 17 mm
- 16 1/4" Dr. Bit Sockets Hex 3, 4, 5, 6, 8 mm

Phillips #1, #2

Slotted 4, 5.5, 6.5 mm Torx® T10, T15, T20, T25, T30, T40

- 4 1/2" Dr. Long Bit Sockets Torx® T25, T27, T30, T40
- 6 1/2" Dr. Long Bit Sockets Hex 5, 6, 7, 8, 12, 14 mm
- 9 Double Open End Wrenches 8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 16 x 18, 17 x 19, 21 x 23, 22 x 24 mm
- 13 Acetate Screwdrivers Torx® T10 x100, T15 x100, T20 x100, T25 x100,

T27 x 100, T30 x 100 mm

Slotted 6x38, 3.2x75, 5x100, 6x150 mm Phillips #1x75, #2x38, #2x100 mm

2 - T-Series Go-Through Screwdrivers Slotted 8 x 150 mm Phillips #3 x 150 mm

- 1 Adjustable Wrench 8"
- 1 Curved Jaw Quick-Release Pliers 10"
- 1 Long Nose Locking Pliers 6"
- 1- Metal Sheet Clamping Locking Pliers 8"
- 1 C-Clamp Locking Pliers 11"
- 1 Plastic Rivet Removal Pliers
- 1 Standard Bumping Hammer 310 g
- 1 Curved Pein and Finishing Hammer 305 g
- 1- Hickory Dead Blow Hammer 40 mm
- 1 Hickory Ball Pein Hammer 24 oz
- 3 Dollies Anvil, Wedge, Toe
- 2 Aviation Snips Left Cut 10", Right Cut 10"
- 1 Aluminum Hack Saw 12"
- 1 Pinch Bar 18 x 400 mm
- 4 Files 6" Half Round Bastard Cut, 6" Half Round Smooth Cut 6" Round Second Cut, 6" Three Square Second Cut
- 10 Accessories

9pc. Metric Long Arm Ball Point Hex Key Set 1/4" Dr. Wobble Extension Bars 2", 4" 1/4" Dr. Spinner Handle

1/4" Dr. T-Handle

1/2" Dr. Wobble Extension Bars 5", 10"

1/2" Dr. T-Handle

1/4", 1/2" Dr. Universal Joints





Please refer to the warranty terms of the individual product



Fits ST95121 5 Drawer Roller Cabinet 28" and ST95107SC 7 Drawer Roller Cabinet 31"

Article Code Length (mm) Width (mm) Hight (mm) 570.0 ST95208S 375.0 30.0

171 Pc. General Tool Set

CONTENTS:

- 3 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets
- 10 1/4" Dr. 6pt. Metric Sockets 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm
- 3 1/4" Dr. 6pt. Metric Deep Sockets 6, 7, 10 mm
- 9 3/8" Dr. 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16 mm
- 3 3/8" Dr. 6pt. Metric Deep Sockets 13, 15, 16 mm
- 10 1/2" Dr. 6pt. Metric Sockets 10, 14, 15, 16, 17, 18, 19, 21, 22, 27 mm
- 2 1/2" Dr. 6pt. Metric Deep Sockets 17, 19 mm
- 11 1/2" Dr. 12pt. Metric Sockets 10, 11, 12, 13, 17, 19, 20, 22, 24, 30, 32 mm
- 4 1/4" Dr. Bit Sockets Hex 5, 6 mm, Pozidriv #2, Slotted 5.5 mm
- 5 3/8" Dr. Bit Sockets Torx® T10, T15, T20, T25, T30
- 5 1/2" Dr. Bit Sockets Hex 5, 6, 7, 8, 10 mm
- 4 1/2" Dr. Long Bit Sockets Torx® T25, T27, T30, T45
- 6 1/2" Dr. Long Bit Sockets Hex 5, 6, 7, 8, 12, 14 mm
- 3 1/2" Dr. Long Bit Sockets Triple Square M6, M8, M10
- 4 1/2" Dr. 6pt. Metric Impact Sockets 17, 19, 21, 22 mm
- 16 Combination Wrenches 7, 10, 11, 12, 13, 14, 15, 16, 17, 19, 20, 21, 22, 23, 24, 27 mm
- 9 Double Open End Wrenches
 - 8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 16 x 18, 17 x 19, 21 x 23, 22 x 24 mm
- 7 Deep Offset Double Box End Wrenches 8x9, 10x11, 12x13, 14x15, 18x19, 20x22, 24x27 mm
- 15 Acetate Screwdrivers Torx® T10 x100, T15 x100, T20 x100, T25 x100,

T27 x 100, T30 x 100 mm

Slotted 6 x 38, 3.2 x 75, 5 x 100, 6 x 150, 8 x 150 mm Phillips #1x75, #2x38, #2x100, #3x150 mm

- 1- Slip Joint Pliers 8"
- 1- Long Nose Pliers 6"
- 1 Diagonal Pliers 5"
- 1 Linesman Pliers 7"
- 1 External Snap Ring Straight Pliers 7"
- 1 External Snap Ring Curved Pliers 7"
- 1- Internal Snap Ring Straight Pliers 7"
- 1- Internal Snap Ring Curved Pliers 7"
- 1 Hickory Ball Pein Hammer 24 oz
- 1 Air Blow Gun 100 mm
- 1-1/2" Dr. Air Impact Wrench
- 5 End Cap Oil Filter Wrench 65, 74, 76, 90, 93 mm
- 1 Universal 3-Jaw Oil Filter Wrench 63-102 mm
- 1 Oil Filter Wrench 75-95 mm
- 1 Dial Torque Wrench 300 Nm
- 22 Accessories
 - 9pc. Metric Long Arm Ball Point Hex Key Set 16pc. Feeler Gauge Set


 - 1/4" Dr. Wobble Extension Bars 2", 4"
 1/4" Dr. Spinner Handle
 1/4" Dr. Flex Extension Bar 6"
 3/8" Dr. Locking Extension Bar 6", 10"
 3/8" Dr. Spark Plug Sockets 16, 21 mm

 - 3/8" Dr. Flex Extension Bar 8"
 - 1/2" Dr. Wobble Extension Bars 5", 10" 1/2" Dr. T-Handle 1/4", 3/8", 1/2" Dr. Universal Joints

 - 3/8"Fx1/4"M, 1/2"Fx3/8"M Socket Adapters
 - Japanese Style Plug R1/4"
 - Flexible Magnetic Pickup Tool 400 mm x 1 kg
 - T-Handle 6pt. Socket 10 mm















Fits ST95107SC 7 Drawer Roller Cabinet 31"



| Article Code | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|-------------|------------|------------|---|
| ST95207S | 570.0 | 375.0 | 30.0 | 1 |





9 Pc. VDE Insulated Screwdriver and Pliers Set



5 Pc. Basic Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST09262U | 1 - VDE Insulated Linesman Pliers 8" 1 - VDE Insulated Diagonal Pliers 6" 1 - VDE Insulated Long Nose Pliers 6" 6 - G-Series VDE Insulated Screwdrivers Slotted 2.5x75 mm, 4x100 mm, 5.5x125 mm Philips # 0x60 mm, # 1x80 mm, # 2x100 mm | 4 |

| Article Code | Content | 4 |
|--------------|--|----|
| ST06002 | 1 - Adjustable wrench 8" 1 - T series double-ended screwdriver # 2 & 6 mmx100 mm 1 - Long nose pliers 6" 1 - Tape measure 3 mx16 mm 1 - Snap-off knife | 12 |



Please refer to the warranty terms of the individual product





7 Pc. Basic Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST06001SJ | 1- Linesman pliers 7" 1- Adjustable Wrench 8" 1- T series double-ended screwdriver # 2 & 6 mmx10 mm 1- Circuit Tester 1- Tape Measure 2 mx13 mm 1- Utility Knife 1- Claw Hammer with steel handle 8 oz / 227 g | 8 |

9 Pc. Basic Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST06004 | 1- Adjustable wrench 8" 1- T series double-ended screwdriver # 2 & 6 mm x10 mm 1- Linesman pliers 6" 1- Long nose pliers 6" 1- Tape measure 3 m x16 mm 1- Claw hammer with steel handle 8 oz / 227 g 1- Circuit tester 1- Aluminum alloy flashlight 1- Snap-off knife | 8 |

Please refer to the warranty terms of the individual product







11 Pc. Driver's Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST06011 | 1- 1/2" Dr. L Type Extendable Socket Wrench 2- 1/2" Dr. Double-end Sockets 17 x 19, 21 x 23 mm 1- Linesman Pliers 7" 1- Long Nose Pliers 6" 1- Adjustable Wrench 8" 1- Acetate Screwdriver Slotted 6 x 100 mm 1- Acetate Screwdriver Phillips #2 x 100 mm 1- Tape Measure 3 m x 16 mm 1- Utility Knife 18 x 100 mm 1- LED Flashlight | 4 |



Please refer to the warranty terms of the individual product



19 Pc. Basic Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST04110SC | 1- Linesman pliers 6" 8- Long hex keys 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm 1- Claw hammer with wooden handle 8 oz / 227 g 1- Mini saw 6" 2- Slotted screwdriver 3x75 mm, 6x100 mm 2- Phillips screwdriver # 0x75 mm, # 2x100 mm 1- Tape measure 3 mx16 mm 1- Circuit tester 1- Snap-off knife 1- Adjustable wrench 8" | 6 |



Please refer to the warranty terms of the individual product



25 Pc. Basic Tool Set

| Article Code | Content | | |
|--------------|--|--|---|
| ST06008SJ | 2 - Acetate Screwdrivers Slotted 5x100 mm Phillips #1x100 mm 1- Circuit Tester 1- Adjustable Wrench 8" 1- Long Nose Pliers 6" 1- Linesman Pliers 6" 1- Insulation Tape 1- Fine Point Tweezer 1- Tape Measure 3 mx16 mm 1- Utility Knife 1- Scissors 1- Aluminum Flashlight | 2 - Mini Hacksaw Blades 1- Hickory Claw Hammer 8oz / 227 g | 4 |





35 Pc. 1/4" and 3/8" Drive E-Torx® Socket and Wrench Set

| Article Code | Content | |
|--------------|--|----|
| ST09010SJ | 7 - 1/4" Shank Tamper-Proof Torx® Bits T10, T15, T20, T25, T27, T30, T40 12 - 3/8" Dr. E-Torx® Sockets E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18, E20 11 - 3/8" Dr. Torx® Bit Sockets T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60 4 - E-Torx® Wrenches E6xE8, E10xE12, E14xE18, E20xE24 1 - 1/4" Shankx3/8" Dr. Bit Adapter | 12 |



21 Pc. 1/2" Drive 6 Point and 12 Point Metric/SAE Socket Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09077SJ | 1 - Quick-Release Ratchet 8 - Metric 6pt. Sockets 10, 11, 12, 13, 14, 15, 17, 19 mm 4 - SAE 12pt. Sockets 3/8", 7/16", 1/2", 9/16" 1 - Spark Plug Socket 16 mm 5 - Metric Combination Wrenches 10, 11, 12, 13, 14 mm 2 - Wobble Extensions 5", 10" | 4 |



25 Pc. 1/2" Drive 6 Point and 12 Point Metric Socket and Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09506SJ | 1 - 1/2" Quick-Release Ratchet 12 - 1/2" 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm 3 - 1/2" 6pt. Metric Deep Sockets 13, 17, 19 mm 1 - 1/2" Spark Plug Socket 16 mm 5 - Metric Combination Wrenches 10, 11, 12, 13, 14 mm 3 - Accessories 1/2" Wobble Extension 10" 1/2" Universal Joint 3/8"F x1/2"M 3-Way Adapter | 4 |



26 Pc. 1/2" Drive 6 Point Metric Socket Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST09502SJ | 1- Quick-Release Ratchet 9- 6pt. Metric Sockets 10, 12, 14, 16, 17, 19, 21, 22, 24 mm 7- Combination Wrenches 8, 10, 12, 14, 16, 17, 19 mm 4- Acetate Screwdrivers, Slotted 6x100 mm, 6x150 mm Phillips #2x100 mm, #2x150 mm 5- Accessories Wobble Extension Bar 5" Flex Handle 15" Long Nose Pliers 6" Diagonal Pliers 6" Linesman Pliers 7" | 4 |



33 Pc. 1/2" Drive 6 Point Metric Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09099 | 1 - Quick-Release Ratchet 21 - 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32, 34 mm 5 - 12pt. Metric Sockets, 10, 12, 14, 17, 19 mm 2 - Metric Quad Box Wrenches 8 x 10 + 12 x 13 mm, 16 x 17 + 18 x 19 mm 4 - Accessories, Wobble Extension Bars 5", 10" 3/8"F x 1/2"M 3-Way Adapter Universal Joint | 4 |



42 Pc. 3/8" Drive 6 Point Metric 120XP Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09054 | 1 - 3/8" Drive 120xp Ratchet 1 - 3/8" Universal Joint 3 - 3/8" Wobble Extensions 3", 6", 10" 16 - 3/8" Metric 6pt. Sockets 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 14 - 3/8" Metric 6pt. Deep Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22 mm 7 - 120xp Metric Ratcheting Wrenches 8, 10, 12, 13, 14, 15, 18 mm | 3 |



32 Pc. 3/8" Drive 6 Point SAE 120XP Socket and Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09044 | 1- 3/8" 120xp Ratchet 1- 3/8" Universal Joint 3- 3/8" Wobble Extensions 3", 6", 10" 11- 3/8" SAE 6pt. Sockets 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 9- 3/8" SAE 6pt. Deep Sockets 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8" 7- 120xp SAE Ratcheting Wrenches 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4" | 3 |



52 Pc. 1/4" Drive 6 Point Metric Master Tool Set

| Article Code | Content | | |
|--------------|---|--|---|
| ST09505SJ | 1- Quick Release Ratchet 14- 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6- 6pt. Metric Deep Sockets 8,9,10,11,12, 13 mm 18- 5/16" Shank 30L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3, T10, T15, T20, T25, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm 1- Mini Long Nose Plier 5" | 1- Mini Diagonal Plier 5" 1- Curved Jaw Locking Plier 5" 1- Adjustable Wrench 6" 3- Screwdrivers Slotted 3.2 x 150 mm Phillips # 0 x 75 mm Torx® 18 x 75 mm 5- Accessories Spinner Handle Sliding T-Bar Wobble Extension Bars 2", 4" Universal Joint Bit Coupler | 4 |



58 Pc. 3/8" Drive 6 Point Metric Mechanic's Tool Set

| Article Code | Content | | |
|--------------|--|---|---|
| ST09516SJ | 1- 3/8" Dr. Quick Release Ratchet 14- 3/8" Dr. 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1- 9 Pc. Metric Ball Point Hex Key Set 1,5, 2, 2,5, 3, 4, 5, 6, 8, 10 mm 10- Combination Wrenches 8, 10, 11, 12, 13, 14, 15, 16, 18, 19 mm 1- Metric Combination Ratcheting Wrench 17 mm 1- Adjustable Wrench 8" 7- Acetat Screwdrivers Slotted 6x38 mm, 32x75 mm, 5x100 mm Phillips #2 x 38 mm, #0 x 75 mm, #1x100 mm, #2x150 mm | 1- Linesman pliers 8" 1- Long Nose Pliers 6" 1- 5 pc. Snap Ring Pliers Set 1- Tape Measure 3 mx16 mm 1- 23 pc. Feeler Gauge Set 0.02 mm - 1 mm 1- Straight Steel Ruler 150 mm 1- Hickory Ball Pein Hammer 16 oz / 454 g 1- Magnetic Pickup Tool 1- Snap-off Knife 1- Aluminum Alloy Flashlight (with 2 AA batteries) 1- Universal Joint | 2 |



76 Pc. 1/4" and 1/2" Drive 6 Point Metric Socket Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09519SJ | 2 - 1/4", 1/2" Dr. Quick-Release Ratchets 7 - 1/4" Dr. 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14 mm 18 - 1/4" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T8, T10, T15,T20, T25, T30, T40 Hex 3, 4, 5, 6 mm 12 - 1/2" Dr. 6pt. Metric Sockets 8, 10, 12, 13, 14, 17, 19, 22, 24, 27, 30, 32 mm 9 - Combination Wrenches 8, 10, 11, 12, 13, 14, 17, 19, 22 mm 15 - 5/16" Shank 30L Bits Slotted 8, 10, 12 mm Phillips #3, #4 Pozidriv #3, #4 Torx® T40, T45, T50, T55 Hex 8, 10, 12, 14 mm 2 - 1/2" Dr. Spark Plug Sockets 16, 21 mm 11 - Accessories 1/4" Dr. T-Handle 1/4" Dr. Flex Extension 1/4" Dr. Wobble Extension Bars 2", 4" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 1/2" Dr. Universal Joints 1/4" Dr. Spinner Handle 1/2" Dr. T-Handle 5/16" Shankx1/2" Dr. Bit Adapter | 3 |



124 Pc. 1/4", 3/8" & 1/2" Drive 6 Point Metric/SAE 6 Point Socket Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09014SJ | 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 4 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 12 mm 11 - 3/8" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 12 mm 11 - 3/8" Dr. 6pt. Metric Deep Socket 13, 14, 15, 16, 17, 18, 19 mm 4 - 3/8" Dr. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 17 - 3/8" Dr. Bit Sockets Slotted 5.5, 6.5 mm Phillips #1, #2 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55, T60 Hex 3, 4, 5, 6 mm Pozidriv #1, #2, #3 | 2 |
| | 41 - Accessories 1/4" Dr. Spinner Handle 1/4" Dr. Wobble Extension Bar 2" 3/8" Dr. Wobble Extension Bars 3", 6" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 3/8", 1/2" Dr. Universal Joints 3/8"Fx1/4"M, 3/8"Fx1/2"M Adapters 1/4" Shankx1/4" Dr. Bit Adapter 1/4" Shank Bits Slotted 4, 5, 6.5 mm Phillips #1, #3 Tamper-Proof Torx® T10, T15, T20, T25, T27, T30, T40 Hex 3, 4, 5, 6 mm Pozidriv #1, #2 9 Pc. Metric Hex Key Set 15, 2, 25, 3, 4, 5, 6, 8, 10 mm Circuit Tester Universal 3-Way Oil Filter Wrench 63-102 mm | |



128 Pc. 1/4", 3/8" and 1/2" Drive 6 Point Metric Socket Wrench Set

150 Pc. 1/4", 3/8" and 1/2" Drive 6 and 12 Point Metric/SAE Socket Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09014A | 1 - 3/8" Dr. Quick-Release Ratchet 1 - 1/4" Dr. Quick-Release Ratchet 1 - 1/2" Dr. Quick-Release Ratchet 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 5 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 11, 12 mm 11 - 3/8" Dr. 6pt. Metric Deep Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 7 - 3/8" Dr. 6pt. Metric Deep Socket 13, 14, 15, 16, 17, 18, 19 mm 8 - 3/8" Dr. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 17 - 3/8" Dr. Bit Sockets Slotted 5.5, 6.5 mm Phillips #1, #2 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55 T60 Hex 3, 4, 5, 6 mm Pozidriv #1, #2, #3 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 7 - 1/2" Dr. 6pt. Metric Sockets 20, 21, 22, 24, 27, 30, 32 mm 1 - 1/2" Dr. Triple Square Bit Socket M10 12 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 1 - Metric X-BEAM® Combination Wrench 13 mm 2 - Acetate Go-Through Screwdrivers Slotted 6 x 100 mm Phillips #2 x 100 mm 41 - Accessories 1/4" Dr. Spinner Handle 1/4" Dr. Wobble Extension Bars 3", 6" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 3/8", 1/2" Dr. Universal Joints 3/8"Fx1/4"M, 3/8"Fx1/2"M Adapters 1/4" Shank x1/4" Dr. Bit Adapter 1/4" Shank Sits Slotted 4, 5, 6.5 mm Phillips #1, #3 Tamper-Proof Torx® T10, T15, T20, T25, T27, T30, T40 Hex 3, 4, 5, 6 mm Pozidriv #1, #2 9 Pc. Metric Extra Long Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm Circuit Tester Universal 3-Way 0il Filter Wrench 63-102 mm | 2 |

| ST09510L 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 6 - 1/4" Dr. 6pt. Metric Deep Sockets 4, 5, 6, 7, 8, 9 mm 11 - 3/8" Dr. 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 2 - 3/8" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Pozidriv #1, #2, #3 Pozidriv #1, #2, #3 Torv® 120, 130, 140 Tamper-Proof Torv® 145, 150, 155, 160 Hex 3, 4, 5, 6, 8, 10 mm 8 - 3/8" Dr. 6pt. Metric Impact Sockets 17, 19, 21, 23 mm 7 - 1/2" Dr. 6pt. Metric Impact Sockets 17, 19, 21, 23 mm 7 - 1/2" Dr. 12pt. Metric Sockets 20, 21, 22, 24, 27, 30, 32 mm 4 - 1/2" Dr. 12pt. SAE Sockets 15/16, 1, 1-1/16, 1-1/4" 6 - 1/2" Dr. 6pt. Metric Deep Sockets 10, 12, 13, 14, 17, 19 mm 12 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 3 - Metric Double Box Ratcheting Wrenches 8x10, 12x13, 17x19 mm 27 - Accessories 1/4" Dr. Bit Adapter 1/4" Dr. Wobble Extension Bar 4" 3/8" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Wobble Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 10" 1/4", 3/8", 1/2" Dr. Universal Joints 1/4" Shank Tamper-Proof Torx® Bits 110, 115, 720, 725, 727, 730, 740 10 Pc.Metric Hex Key Set 1,5,2,2,5,3,4,5,5,5,6,8,10 mm | Article Code | Content | |
|---|--------------|--|---|
| | ST09510L | 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 6 - 1/4" Dr. 6pt. Metric Deep Sockets 4, 5, 6, 7, 8, 9 mm 11 - 3/8" Dr. 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 - 3/8" Dr. 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 6 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 22 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 22 - 3/8" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Pozidriv #1, #2, #3 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55, T60 Hex 3, 4, 5, 6, 8, 10 mm 8 - 3/8" Dr. 6pt. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 4 - 1/2" Dr. 6pt. Metric Impact Sockets 17, 19, 21, 23 mm 7 - 1/2" Dr. 12pt. Metric Sockets 20, 21, 22, 24, 27, 30, 32 mm 4 - 1/2" Dr. 12pt. SAE Sockets 15/16, 1, 1-1/16, 1-1/4" 6 - 1/2" Dr. 12pt. SAE Sockets 15/16, 1, 1-1/16, 1-1/4" 6 - 1/2" Dr. 12pt. SAE Sockets 15/16, 1, 1-1/16, 1-1/4" 7 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 27 - Accessories 1/4" Dr. Bit Adapter 1/4" Dr. Bit Adapter 1/4" Dr. Wobble Extension Bar 4" 3/8" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 5" 1/2" Dr. Locking Extension Bar 10" 1/4", 3/8", 1/2" Dr. Universal Joints 1/4" Shank Tamper-Proof Torx® Bits T10, T15, T20, T25, T27, T30, T40 10 Pc.Metric Hex Key Set | 1 |





150 PC. 1/4", 3/8" & 1/2" ST09510L DRIVE 6 & 12 POINT METRIC/ SAE SOCKET WRENCH SET







Flush reversing lever




Single hex (6 pt.) fastener end



Sockets feature Large easy ID off-corner size markings off-corner loading





Standard & deep sockets















150 Pc. 1/4", 3/8" and 1/2" Drive 6 and 12 Point Metric/SAE Master Tool Set

Article Code Content ST09510SJ 3 - 1/4", 3/8", 1/2" Dr. Quick-Release Ratchets 10 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10 - 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 6 - 1/4" Dr. 6pt. Metric Deep Sockets 4, 5, 6, 7, 8, 9 mm 11 - 3/8" Dr. 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 9 - 3/8" Dr. 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 6 - 3/8" Dr. 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15 mm 2 - 3/8" Dr. Spark Plug Sockets 16, 21 mm 22 - 3/8" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3; Pozidriv #1, #2, #3 Torx® T20, T30, T40 Tamper-Proof Torx® T45, T50, T55, T60 Hex 3, 4, 5, 6, 8, 10 mm 8 - 3/8" Dr. 6pt. E-Torx® Sockets E8, E10, E11, E12, E14, E16, E18, E20 8 - 1/2" Dr. 12pt. Metric Sockets 20, 21, 22, 24, 27, 30, 32, 34 mm 4 - 1/2" Dr. 12pt. SAE Sockets 15/16, 1, 1-1/16, 1-1/4" 6 - 1/2" Dr. 6pt. Metric Deep Sockets 10, 12, 13, 14, 12 - Metric Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 3 - Metric Double Box Ratcheting Wrenches 8 x 10, 12 x 13, 17 x 19 mm 3 - Go-Through Screwdrivers Slotted 6 x 150 mm, 8 x 200 mm Phillips #2x150 mm 27 - Accessories 1/4" Dr. Bit Adapter 1/4" Dr. Spinner Handle 1/4" Dr. Wobble Extension Bar 4" 1/4" Dr. Extension Bar 2" 3/8" Dr. Locking Extension Bars 3", 6" 1/2" Dr. Wobble Extension Bar 5" 1/2" Dr. Locking Extension Bar 10" 1/4", 3/8", 1/2" Dr. Universal Joints 1/4" Shank Tamper-Proof Torx® Bits T10, T15, T20, T25, T27, T30, T40 9 Pc. Metric Extra Long Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

70 Pc. Metric Cantilever Tool Box and Tray Set

| Article Code | Content | |
|---------------------------------|--|---|
| | 1 - 5" Cantilever Tool Box | 1 |
| ST95104A70-6 | 1 - 1/2" Dr. Quick-Release Ratchet 17 - 1/2" Dr. Metric Sockets* 8, 9, 10, 11, 12, 13, 14, 17, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm | |
| 6 Point Metric Standard and | 3 - 1/2" Dr. Metric Deep Sockets* 17, 19, 21 mm 11 - Combination Wrenches 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24 mm | |
| Deep Sockets | 4 - Acetate Screwdrivers Slotted 5x75 mm, 6x150 mm Phillips #1x75 mm, #2x150 mm | |
| | 1 - Adjustable Wrench 12" 1 - Long Nose Pliers 6" | |
| ST95104A70 | 1- Diagonal Pliers 6" 1- Linesman Pliers 7" | |
| 3133104A70 | 1- Hickory Ball Pein Hammer 24 oz | |
| 12 Point Metric Standard and | 28 - Accessories 1/2" Dr. Wobble Extension Bars 5", 10" 1/2" Dr. Universal Joint | |
| Deep Sockets | 1/2" Dr. Offset Handle 260 mm 8 Pc. Metric Foldup Hex Key Set 16 Pc. Feeler Gauge Set | |





150 PC. 1/4", 3/8" & 1/2" ST09510SI DRIVE 6 & 12 POINT METRIC/ SAE MASTER TOOL SET







Flush reversing lever




Single hex (6 pt.) fastener end



Sockets feature Large easy ID off-corner size markings off-corner loading





Standard & deep sockets


















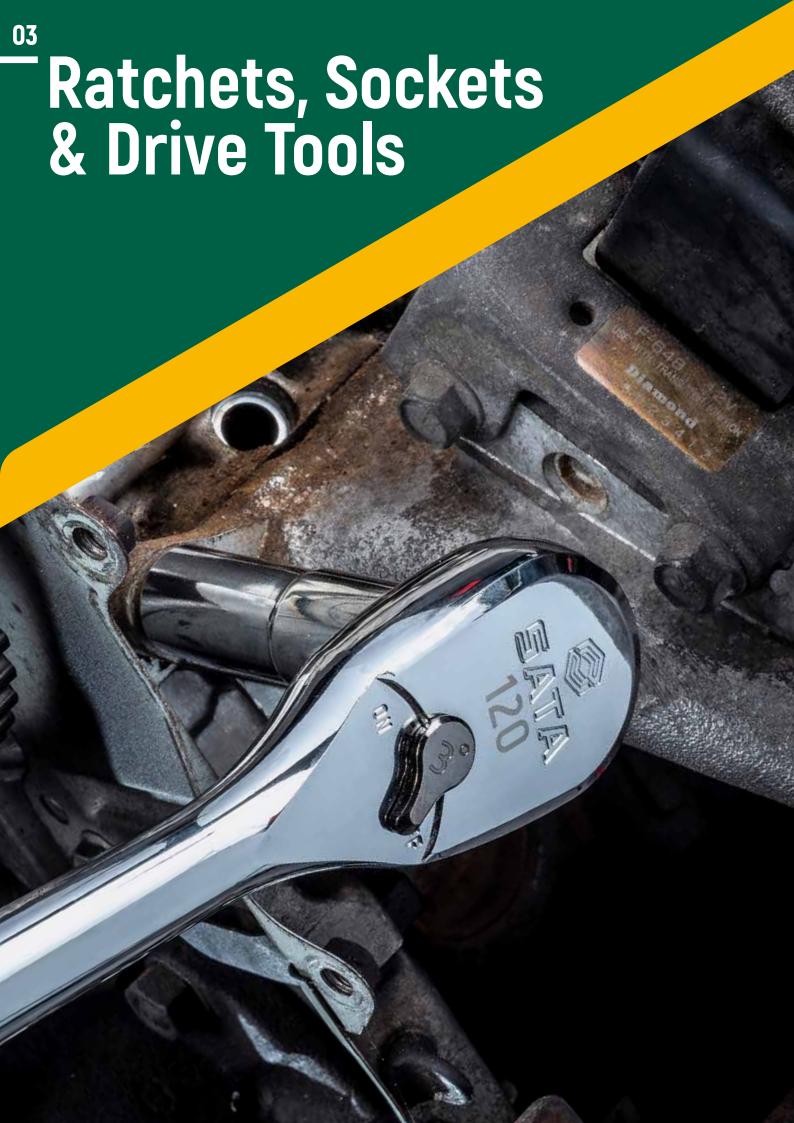

ST13975

3 PC. 120XP 1/4", 3/8" AND 1/2" RATCHET SET








Two double stacked Resists dirt 60-tooth pawls



infiltration



Teardrop, lowprofile head



Flush reversing lever



Full polish chrome finish

1/4"

3/8"

1/2"





3 Pc. 120XP 1/4", 3/8" and 1/2" Ratchet Set

| Article Code | Content | |
|--------------|--|----|
| ST13975 | 1 - 120XP Dr. Full Polish Ratchet 1/4" 1 - 120XP Dr. Full Polish Ratchet 3/8" 1 - 120XP Dr. Full Polish Ratchet 1/2" | 12 |

13 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09521L | 1 - Quick-Release Round Head Ratchet 11 - 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 1 - Wobble Extension Bar 2" | 6 |





20 Pc. 1/4" Drive 6 Point Metric Socket Set

Article Code Content 1 - Quick-Release Round Head Ratchet 13 - 6pt. Metric Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 4 - 6pt. Metric Deep Sockets 8, 10, 12, 13 mm 1 - Extension Bar 2" 1 - Spinner Handle

21 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|----|
| ST09521-02 | 1 - Quick-Release Ratchet 11 - 6pt. Metric Sockets 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 6 - Shank 25L Bits Slotted 4, 5, 6 mm Phillips #1, #2, #3 3 - Accessories Extension 2" Spinner Handle 6" Bit Adapter | 12 |





36 Pc. 1/4" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|----|
| ST09001SJ | 1 - Quick-Release Ratchet 14 - 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 5 - 6pt. Metric Deep Sockets 8, 10, 11, 12, 13 mm 9 - Shank 25L Bits Slotted 4, 5, 6 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm 7 - Accessories Spinner Handle Wobble Extension Bars 2", 4" Flex Extension 6" Bit Adapter T-Handle Universal Joint | 12 |



52 Pc. 1/4" Drive 6 Point Metric Socket Set

Article Code Content ST09002SJ 1 - Quick-Release Ratchet 9 - Shank 25L Bits 14 - 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm Slotted 4, 5, 6.5 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm 4 - 6pt. Metric Deep Sock- 6 -Accessories Spinner Handle ets 8, 10, 12, 13 mm ets o, IU, IZ, IS mm 18 - Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T10, T15, T20, T25, T30, T40 Hay 7 6 5 6 9 T-Handle Universal Joint Wobble Extension Bars 2", 4" Bit Adapter Hex 3, 4, 5, 6, 8 mm

25 Pc. 1/4" Drive 6 Point SAE Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09098SJ | 1 - Quick-Release Ratchet 10 - 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 10 - 6pt. SAE Deep Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 4 - Accessories Flex Handle 10" Wobble Extension 2", 6" Universal Joint | 6 |





65 Pc. 1/4" and 3/8" Drive 6 Point Metric/SAE Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09011SJ | 1- 3/8" Dr. Quick-Release Ratchet 12- 1/4" Dr. 6pt. Metric Sockets 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10- 1/4" Dr. 6pt. SAE Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 11/32, 3/8, 7/16, 1/2" 18- 1/4" Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Torx® T10, T15, T20, T25, T30, T40 Hex 3, 4, 5, 6, 7, 8 mm 10- 3/8" Dr. 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 8- 3/8" Dr. 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16" 1- 3/8" Dr. Spark Plug Socket 16 mm 5- Accessories 3/8" Dr. Universal Joint 1/4" Shankx 1/4" Dr. Bit Adapter 3/8"Fx1/4" M Adapter 1/4" Dr. Spinner Handle | 3 |



88 Pc. 1/4" and 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09013SJ | 2 - 1/4", 1/2" Dr. Quick-Release Ratchets 13 - 1/4" Dr. 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 6 - 1/4" Dr. 6pt. Metric Deep Sockets 8, 9, 10, 11, 12, 13 mm 17 - 1/4" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2 Pozidriv #1, #2 Torx® T8, T10, T15, T20, T25, T31 Hex 3, 4, 5, 6 mm 2 - 1/2" Dr. Spark Plug Sockets 16, 21 mm 17 - 1/2" Dr. Spark Plug Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 6 - 1/2" Dr. 6pt. Metric Deep Sockets 14, 15, 16, 17, 18, 19 mm 15 - 5/16" Shank 30L Bits Slotted 8, 10, 12 mm Phillips #3, #4 Pozidriv #3, #4 Torx® T40, T45, T50, T55 Hex 8, 10, 12, 14 mm 10 - Accessories 1/4" Dr. T-Handle 1/4" Dr. Wobble Extension Bars 2", 4" 1/2" Dr. Wobble Extension Bars 5", 10" 1/4", 1/2" Dr. Universal Joints 3/8"Fx1/2"M 3-Way Adapter 1/4" Dr. Spinner Handle 5/16" Shank x1/2" Dr. Bit Adapter | 3 |



18 Pc. 1/4" and 1/2" Drive Bit Socket Sets

| Article Code | Description | |
|--------------|--|---|
| ST09051SJ | 18 - Pc. 1/4" and 1/2" Dr. Bit Socket Set 6 - 1/4" Dr. Bit Sockets Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 6 - 1/2" Dr. 50L Triple Square Bit Sockets M5, M6, M8, M10, M12, M14 6 - 1/2" Dr. 100L Triple Square Bit Sockets M5, M6, M8, M10, M12, M14 | 5 |

| Article Code | Description | |
|--------------|--|---|
| ST09052SJ | 18 - Pc. 1/4" and 1/2" Dr. Torx® Bit Socket Set 6 - 1/4" Dr. Torx® Bit Sockets T10, T15, T20, T25, T30, T40 6 - 1/2" Dr. 50L Torx® Bit Sockets T30, T40, T45, T50, T55, T60 6 - 1/2" Dr. 100L Torx® Bit Sockets T30, T40, T45, T50, T55, T60 | 5 |

| Article Code |
|--------------|
| ST09053SJ |







3 Pc. 1/4", 3/8" and 1/2" Metric Socket Tray Set

- Space saving design preferred by, and designed for, professionals
- Helps to keep your workspace organized
- Large markings offer easy size identification
- Clearly marked socket sizes on pins for instant size identification
- Sturdy, break resistant pins have professional strength
- · Quick to read size markers on the top of each pin
- Each tray can hold both standard and deep sockets

3 Pc. 1/4", 3/8" and 1/2" SAE Socket Tray Set

- Space saving design preferred by, and designed for, professionals
- Helps to keep your workspace organized
- Large markings offer easy size identification
- Clearly marked socket sizes on pins for instant size identification
- Sturdy, break resistant pins have professional strength
- Quick to read size markers on the top of each pin
- Each tray can hold both standard and deep sockets





| Article Code | |
|--------------|---|
| ST95401 | 9 |

| Article Code | |
|--------------|---|
| ST95400 | 9 |

1/4" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST11301SC | 3.5 mm | 24.5 | 11.8 | 6.1 | 6 |
| ST11302SC | 4.0 mm | 24.5 | 11.8 | 7.0 | 6 |
| ST11303SC | 4.5 mm | 24.5 | 11.8 | 7.3 | 6 |
| ST11304SC | 5.0 mm | 24.5 | 11.8 | 8.0 | 6 |
| ST11305SC | 5.5 mm | 24.5 | 11.8 | 8.6 | 6 |
| ST11306SC | 6.0 mm | 24.5 | 11.8 | 9.2 | 6 |
| ST11307SC | 7.0 mm | 24.5 | 11.8 | 10.7 | 6 |
| ST11308SC | 8.0 mm | 24.5 | 11.8 | 11.8 | 6 |
| ST11309SC | 9.0 mm | 24.5 | 13.0 | 13.0 | 6 |
| ST11310SC | 10.0 mm | 24.5 | 14.2 | 14.2 | 6 |
| ST11311SC | 11.0 mm | 24.5 | 15.8 | 15.8 | 6 |
| ST11312SC | 12.0 mm | 24.5 | 16.8 | 16.8 | 6 |
| ST11313SC | 13.0 mm | 24.5 | 17.5 | 17.5 | 6 |
| ST11314SC | 14.0 mm | 24.5 | 19.5 | 19.5 | 6 |
| ST11101SC | 5/32" | 24.5 | 11.8 | 7.0 | 6 |
| ST11102SC | 3/16" | 24.5 | 11.8 | 7.8 | 6 |
| ST11103SC | 7/32" | 24.5 | 11.8 | 8.5 | 6 |
| ST11104SC | 1/4" | 24.5 | 11.8 | 9.5 | 6 |
| ST11105SC | 9/32" | 24.5 | 11.8 | 10.7 | 6 |
| ST11106SC | 5/16" | 24.5 | 11.8 | 11.8 | 6 |
| ST11107SC | 11/32" | 24.5 | 12.5 | 12.5 | 6 |
| ST11108SC | 3/8" | 24.5 | 13.8 | 13.8 | 6 |
| ST11109SC | 17/16" | 24.5 | 15.7 | 15.7 | 6 |
| ST11110SC | 1/2" | 24.5 | 17.3 | 17.3 | 6 |

1/4" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST11401SC | 4.0 mm | 49.0 | 11.9 | 6.7 | 6 |
| ST11402SC | 5.0 mm | 49.0 | 11.9 | 8.0 | 6 |
| ST11403SC | 6.0 mm | 49.0 | 11.9 | 9.2 | 6 |
| ST11404SC | 7.0 mm | 49.0 | 11.9 | 10.8 | 6 |
| ST11405SC | 8.0 mm | 49.0 | 11.9 | 11.9 | 6 |
| ST11406SC | 9.0 mm | 49.0 | 13.1 | 13.1 | 6 |
| ST11407SC | 10.0 mm | 49.0 | 14.6 | 14.6 | 6 |
| ST11408SC | 11.0 mm | 49.0 | 15.9 | 15.9 | 6 |
| ST11409SC | 12.0 mm | 49.0 | 16.9 | 16.9 | 6 |
| ST11410SC | 13.0 mm | 49.0 | 17.9 | 17.9 | 6 |
| SC11201 | 3/16" | 49.0 | 11.9 | 7.9 | 6 |
| SC11202 | 7/32" | 49.0 | 11.9 | 8.9 | 6 |
| SC11203 | 1/4" | 49.0 | 11.9 | 9.9 | 6 |
| SC11204 | 9/32" | 49.0 | 11.9 | 11.0 | 6 |
| SC11205 | 5/16" | 49.0 | 11.9 | 11.9 | 6 |
| SC11206 | 11/32" | 49.0 | 13.1 | 13.1 | 6 |
| SC11207 | 3/8" | 49.0 | 14.6 | 14.6 | 6 |
| SC11208 | 7/16" | 49.0 | 15.9 | 15.9 | 6 |
| SC11209 | 1/2" | 49.0 | 17.6 | 17.6 | 6 |

1/4" Drive Quick-Release Round Head Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11901SC | 142.0 | 4 |

1/4" Drive Quick-Release Teardrop Ratchet

- · Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the ratchet
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11905ST | 143.0 | 4 |



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11906ST | 143.0 | 4 |

1/4" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet


- Quick release design allows rapid socket removal
- 45-tooth design requires as little as 8° of swing arc to move a fastener
- Offset handle design provides knuckle clearance in tight access application
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11970SC | 153.0 | 4 |

1/4" Drive 120XP Ratchet

• Designed with 120 positions providing a 3° swing arc so you can turn fasteners in tighter confines



- Enclosed ratchet head design resists dirt infiltration for continuous and efficient execution
- Up to 50% thinner than conventional ratchet systems
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|----|
| ST11974 | 143.0 | 10 |

1/4" Drive Flex Handle / Breaker Bar

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11909SC | 140.0 | 6 |

1/4" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- · Ball detent for secure socket retention
- · Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11910SC | 100.0 | 6 |

1/4" Drive Spinner Handle

Ergonomic handle provides the optimal balance of strength and efficiency

· Ball detent for secure socket retention

· High impcact composite handle

Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability

Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11911SC | 150.0 | 6 |

1/4" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11912SC | 34.7 | 6 |

1/4" Drive Adapter 3/8"

- Pin hole can be used with detent pin for secure socket retention to the adapter
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110.





| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11913SC | 25.5 | 6 |

1/4" Drive Bit Adapter

- Precise fit for bit in adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | |
|--------------|----|
| ST11914SC | 12 |

1/4" Drive Flex Extension

- Flex shaft allows extension to bend into multiple positions
- Reach difficult to access fasteners standard sockets/extensions cannot reach
- Makes it possible to move at an angle up to 20°
- Designed to access extreme angled fasteners, for use in low torque applications
- Pin hole can be used with detent pin for secure socket retention to the extension
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST11922SC | 150.0 | 6 |

1/4" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access vs standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110




| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST11903SC | 2" | 50.8 | 6 |
| ST11904SC | 4" | 101.6 | 6 |



1/4" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|----|
| SC21301 | Phillips #1 | 36.5 | 12.0 | 12 |
| SC21302 | Phillips #2 | 36.5 | 12.0 | 12 |
| SC21303 | Phillips #3 | 36.5 | 12.0 | 12 |



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|----|
| SC21401 | Pozidriv #1 | 36.5 | 12.0 | 12 |
| SC21402 | Pozidriv #2 | 36.5 | 12.0 | 12 |
| SC21403 | Pozidriv #3 | 36.5 | 12.0 | 12 |





| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|----------------|---------------------------|------------------------------|----|
| SC21501 | Slotted 4.0 mm | 36.5 | 12.0 | 12 |
| SC21502 | Slotted 5.5 mm | 36.5 | 12.0 | 12 |
| SC21503 | Slotted 6.5 mm | 36.5 | 12.0 | 12 |





| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|----|
| SC21201 | Hex 3.0 mm | 36.5 | 12.0 | 12 |
| SC21202 | Hex 4.0 mm | 36.5 | 12.0 | 12 |
| SC21203 | Hex 5.0 mm | 36.5 | 12.0 | 12 |
| SC21204 | Hex 6.0 mm | 36.5 | 12.0 | 12 |
| SC21206 | Hex 7.0 mm | 36.5 | 12.0 | 12 |
| SC21205 | Hex 8.0 mm | 36.5 | 12.0 | 12 |





| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|----|
| SC21101 | Torx® T8 | 36.5 | 12.0 | 12 |
| SC21102 | Torx® T10 | 36.5 | 12.0 | 12 |
| SC21103 | Torx® T15 | 36.5 | 12.0 | 12 |
| ST21104SC | Torx® T20 | 36.5 | 12.0 | 12 |
| ST21105SC | Torx® T25 | 36.5 | 12.0 | 12 |
| ST21108BU | Torx® T27 | 36.5 | 12.0 | 12 |
| ST21106 | Torx® T30 | 36.5 | 12.0 | 12 |
| SC21107 | Torx® T40 | 36.5 | 12.0 | 12 |





5 Pc. 3/8" Drive Metric Spark Plug Socket Set

| Article Code | Content | |
|--------------|--|----|
| ST09003SJ | 1 - Wobble Extension Bar 6" 1 - Locking Extension Bar 6" 1 - Offset Flex Head Ratchet Handle 2 - Spark Plug Sockets 16, 21 mm | 12 |

14 Pc. 3/8" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|----|
| ST09523 | 1 - Quick-Release Round Head Ratchet 12 - 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 12 |





22 Pc. 3/8" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|----|
| ST09524 | 1 - Quick-Release Ratchet 14 - 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 4 - 6pt. Metric Deep Sockets 12, 13, 17, 19 mm 1 - Spark Plug Socket 16 mm 1 - Extension Bar 6" | 10 |



60 Pc. 3/8" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09004SJ | 1- Quick-Release Ratchet 18 - 6pt. Metric Sockets 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm 11 - 6pt. Metric Deep Sockets 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 2 - Spark Plug Sockets 16, 21 mm 24 - Bit Sockets Slotted 5.5, 6.5, 8 mm Phillips #1 [2x], #2 [2x], #3 Torx® T10, T15, T20, T25, T30, T40, T45, T50, T55 Hex 3, 4, 5, 6, 7, 8, 10 mm 4 - Accessories Wobble Extension Bars 3", 10" Universal Joint 1/2"F x3/8"M 3-Way Adapter | 3 |



16 Pc. 3/8" Drive 6 Point SAE Socket Set

| Article Code | Content | |
|--------------|--|----|
| ST09085SJ | 1- Quick-Release Ratchet 11- 6pt. SAE Sockets 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" 4- Accessories Wobble Extensions 3", 6" Flex Handle 8" 1/2"Fx3/8"M 3-Way Adapter | 12 |



3/8" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- · Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110




| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST12301SC | 6.0 mm | 25.0 | 17.0 | 10.0 | 6 |
| ST12302SC | 7.0 mm | 25.0 | 17.0 | 10.8 | 6 |
| ST12303SC | 8.0 mm | 25.0 | 17.0 | 11.9 | 6 |
| ST12304SC | 9.0 mm | 25.0 | 17.0 | 12.9 | 6 |
| ST12305SC | 10.0 mm | 25.0 | 17.0 | 14.5 | 6 |
| ST12306SC | 11.0 mm | 25.0 | 17.0 | 15.8 | 6 |
| ST12307SC | 12.0 mm | 25.0 | 17.0 | 17.0 | 6 |
| ST12308SC | 13.0 mm | 25.0 | 18.3 | 18.3 | 6 |
| ST12309SC | 14.0 mm | 25.0 | 19.5 | 19.5 | 6 |
| ST12310SC | 15.0 mm | 25.0 | 20.8 | 20.8 | 6 |
| ST12311SC | 16.0 mm | 25.0 | 22.0 | 22.0 | 6 |
| ST12312SC | 17.0 mm | 25.0 | 23.3 | 23.3 | 6 |
| ST12313SC | 18.0 mm | 25.0 | 23.8 | 23.8 | 6 |
| ST12314SC | 19.0 mm | 28.0 | 25.5 | 19.0 | 6 |
| ST12315SC | 20.0 mm | 28.0 | 27.0 | 23.0 | 4 |
| ST12316SC | 21.0 mm | 28.0 | 27.5 | 25.0 | 4 |
| ST12317SC | 22.0 mm | 31.5 | 29.5 | 26.0 | 4 |
| ST12318SC | 24.0 mm | 31.5 | 31.9 | 26.0 | 4 |
| ST12101SC | 1/4" | 25.0 | 17.2 | 10.9 | 6 |
| ST12102SC | 5/16" | 25.0 | 17.2 | 11.9 | 6 |
| ST12103SC | 3/8" | 25.0 | 17.2 | 13.8 | 6 |
| ST12104SC | 7/16" | 25.0 | 17.2 | 16.0 | 6 |
| ST12105SC | 1/2" | 25.0 | 17.9 | 17.9 | 6 |
| ST12106SC | 9/16" | 25.0 | 19.7 | 19.7 | 6 |
| ST12107SC | 5/8" | 25.0 | 22.2 | 22.2 | 6 |
| ST12108SC | 11/16" | 25.0 | 23.9 | 23.9 | 6 |
| ST12109SC | 3/4" | 25.0 | 25.6 | 25.6 | 6 |
| ST12110SC | 13/16" | 28.0 | 27.9 | 27.9 | 6 |
| SC12111 | 7/8" | 28.0 | 29.7 | 29.7 | 6 |

3/8" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- · Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST12601BU | 8.0 mm | 25.0 | 17.0 | 11.9 | 6 |
| ST12602BU | 9.0 mm | 25.0 | 17.0 | 12.9 | 6 |
| ST12603BU | 10.0 mm | 25.0 | 17.0 | 14.5 | 6 |
| ST12604BU | 11.0 mm | 25.0 | 17.0 | 15.8 | 6 |
| ST12605BU | 12.0 mm | 25.0 | 17.0 | 17.0 | 6 |
| ST12606BU | 13.0 mm | 25.0 | 18.3 | 18.3 | 6 |
| ST12607BU | 14.0 mm | 25.0 | 19.5 | 19.5 | 6 |
| ST12608BU | 15.0 mm | 25.0 | 20.8 | 20.8 | 6 |
| ST12609BU | 16.0 mm | 25.0 | 22.0 | 22.0 | 6 |
| ST12610BU | 17.0 mm | 25.0 | 23.3 | 23.3 | 6 |
| ST12611BU | 18.0 mm | 25.0 | 23.8 | 23.8 | 6 |
| ST12612BU | 19.0 mm | 28.0 | 25.5 | 19.0 | 6 |
| ST12613BU | 20.0 mm | 28.0 | 27.0 | 23.0 | 4 |
| ST12614BU | 21.0 mm | 28.0 | 27.5 | 25.0 | 4 |
| ST12615BU | 22.0 mm | 31.5 | 29.5 | 26.0 | 4 |
| ST12616BU | 24.0 mm | 31.5 | 31.9 | 26.0 | 4 |

3/8" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- · Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST12401SC | 8.0 mm | 63.5 | 16.8 | 11.9 | 6 |
| ST12402SC | 9.0 mm | 63.5 | 16.8 | 12.9 | 6 |
| ST12403SC | 10.0 mm | 63.5 | 16.8 | 14.5 | 6 |
| ST12404SC | 11.0 mm | 63.5 | 16.8 | 15.8 | 6 |
| ST12405SC | 12.0 mm | 63.5 | 16.8 | 16.8 | 6 |
| ST12406SC | 13.0 mm | 63.5 | 18.7 | 18.7 | 6 |
| ST12407SC | 14.0 mm | 63.5 | 19.5 | 19.5 | 6 |
| ST12408SC | 15.0 mm | 63.5 | 20.8 | 20.8 | 6 |
| ST12409SC | 16.0 mm | 63.5 | 22.0 | 22.0 | 6 |
| ST12410SC | 17.0 mm | 63.5 | 23.7 | 23.7 | 6 |
| ST12411SC | 18.0 mm | 63.5 | 23.8 | 23.8 | 6 |
| ST12412SC | 19.0 mm | 63.5 | 25.5 | 25.5 | 6 |
| ST12413SC | 20.0 mm | 63.5 | 27.0 | 27.0 | 4 |
| ST12414SC | 21.0 mm | 63.5 | 27.8 | 27.8 | 4 |
| ST12415SC | 22.0 mm | 63.5 | 29.5 | 29.5 | 4 |
| SC12201 | 3/8" | 63.5 | 16.8 | 13.8 | 6 |
| SC12202 | 7/16" | 63.5 | 16.8 | 16.0 | 6 |
| SC12203 | 1/2" | 63.5 | 18.3 | 18.3 | 6 |
| SC12204 | 9/16" | 63.5 | 19.8 | 19.8 | 6 |
| SC12205 | 5/8" | 63.5 | 22.0 | 22.0 | 6 |
| SC12206 | 11/16" | 63.5 | 23.8 | 23.8 | 6 |
| SC12207 | 3/4" | 63.5 | 25.6 | 25.6 | 6 |
| SC12208 | 13/16" | 63.5 | 27.8 | 27.8 | 6 |
| SC12209 | 7/8" | 63.5 | 29.8 | 29.8 | 6 |

3/8" Drive External Torx® Sockets

- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds Camcar TXF-701







These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|---------------------------------|-------------------------------|---|
| ST12701SC | E4 | 26.0 | 17.0 | 7.0 | 6 |
| ST12702SC | E5 | 26.0 | 17.0 | 8.0 | 6 |
| ST12703SC | E6 | 26.0 | 17.0 | 8.0 | 6 |
| ST12704SC | E7 | 26.0 | 17.0 | 9.0 | 6 |
| ST12705SC | E8 | 26.0 | 17.0 | 10.5 | 6 |
| ST12706SC | E10 | 26.0 | 17.0 | 13.0 | 6 |
| ST12707SC | E11 | 26.0 | 17.0 | 14.0 | 6 |
| ST12708SC | E12 | 26.0 | 17.0 | 15.0 | 6 |
| ST12709SC | E14 | 28.5 | 18.3 | 18.3 | 6 |
| ST12710SC | E16 | 28.5 | 18.3 | 18.3 | 6 |
| ST12711SC | E18 | 28.5 | 19.5 | 19.5 | 6 |
| ST12712SC | E20 | 30.5 | 22.0 | 22.0 | 6 |

3/8" Drive Spark Plug Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





| Article Code | Fastener Size | |
|--------------|---------------|---|
| ST12915SC | 16.0 mm | 6 |
| ST12916SC | 21.0 mm | 6 |
| ST12919SC | 5/8" | 6 |
| ST12920SC | 13/16" | 6 |

3/8" Drive Quick-Release Stubby Ratchet

- Stubby handle length for improved access
- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12960SC | 169.0 | 6 |

3/8" Drive Quick-Release Round Head Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12901SC | 197.0 | 4 |

3/8" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





3/8" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12972ST | 200.0 | 4 |


3/8" Drive Offset Flex Quick-Release Teardrop Ratchet

- · Quick release design allows rapid socket removal
- 45-tooth design requires as little as 8° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Flex head provides access for hard to reach angeled fasteners
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12911SC | 275.0 | 4 |

3/8" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench



- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12970SC | 217.0 | 4 |



3/8" Drive 120XP Ratchet

- Designed with 120 positions providing a 3° swing arc so you can turn fasteners in tighter confines
- Designed with two double stacked 60-tooth pawls for exceptional strength
- Enclosed ratchet head design resists dirt infiltration for continuous and efficient execution
- Up to 50% thinner than conventional ratchet systems
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | 6 |
|--------------|-------------|----|
| ST12974 | 200.0 | 10 |

3/8" Drive Flex Handle / Breaker Bar

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12909SC | 213.0 | 6 |

3/8" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12910SC | 247.0 | 6 |

3/8" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12912SC | 51.2 | 6 |

3/8" Drive Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST12913SC | 1/4" | 25.6 | 6 |
| ST12914SC | 1/2" | 25.7 | 6 |

3/8" Drive Bit Adapter 1/4"

- Precise fit for bit in adapter
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium allov steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | |
|--------------|---|
| ST12917SC | 6 |

3/8" Drive 3-Way Adapter 1/2"

- 3 Position adapter
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durabilit
- Meets or exceeds ASME B107.110



| Ar | rticle Code | |
|----|-------------|---|
| ST | 712930SC | 6 |

3/8" Drive Flex Extension

- Flex shaft allows extension to bend into multiple positions
- Reach difficult to access fasteners standard sockets/extensions cannot reach
- Makes it possible to move at an angle up to 20°
- Designed to access extreme angled fasteners, for use in low torque applications
- Pin hole can be used with detent pin for secure socket retention to the extension
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12922SC | 200.0 | 6 |

3/8" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access versus standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST12903SC | 3" | 76.2 | 6 |
| ST12904SC | 6" | 152.4 | 6 |
| ST12905SC | 10" | 254.0 | 6 |

3/8" Drive Locking Extension


- Locking extension for better reach to more fasteners
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Locking mechanism securely attaches socket to extension
- Knurled grip provides a nonslip surface
- · Ball detent for secure socket retention
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST12906SC | 3" | 76.2 | 6 |
| ST12907SC | 6" | 152.4 | 6 |
| ST12908SC | 10" | 254.0 | 6 |

3/8" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|----------------------------------|------------------------------|---|
| SC22301 | Phillips #1 | 48.0 | 18.0 | 6 |
| SC22302 | Phillips #2 | 48.0 | 18.0 | 6 |
| SC22303 | Phillips #3 | 254 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|---|
| SC22401 | Pozidriv #1 | 48.0 | 18.0 | 6 |
| SC22402 | Pozidriv #2 | 48.0 | 18.0 | 6 |
| SC22403 | Pozidriv #3 | 254 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|----------------|----------------------------------|------------------------------|---|
| SC22504 | Slotted 4.0 mm | 48.0 | 18.0 | 6 |
| SC22501 | Slotted 5.5 mm | 48.0 | 18.0 | 6 |
| SC22502 | Slotted 6.5 mm | 48.0 | 18.0 | 6 |
| SC22503 | Slotted 8.0 mm | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|---|
| SC22201 | Hex 3.0 mm | 48.0 | 18.0 | 6 |
| SC22202 | Hex 4.0 mm | 48.0 | 18.0 | 6 |
| SC22203 | Hex 5.0 mm | 48.0 | 18.0 | 6 |
| SC22204 | Hex 6.0 mm | 48.0 | 18.0 | 6 |
| SC22205 | Hex 7.0 mm | 48.0 | 18.0 | 6 |
| SC22206 | Hex 8.0 mm | 48.0 | 18.0 | 6 |
| SC22207 | Hex 10.0 mm | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|------------------------------|---------------------------------|---|
| SC22101 | Torx® T10 | 48.0 | 18.0 | 6 |
| SC22102 | Torx® T15 | 48.0 | 18.0 | 6 |
| SC22103 | Torx® T20 | 48.0 | 18.0 | 6 |
| SC22104 | Torx® T25 | 48.0 | 18.0 | 6 |
| SC22105 | Torx® T27 | 48.0 | 18.0 | 6 |
| SC22106 | Torx® T30 | 48.0 | 18.0 | 6 |
| SC22107 | Torx® T40 | 48.0 | 18.0 | 6 |
| SC22108 | Torx® T45 | 48.0 | 18.0 | 6 |
| SC22109 | Torx® T50 | 48.0 | 18.0 | 6 |
| SC22110 | Torx® T55 | 48.0 | 18.0 | 6 |
| SC22111 | Torx® T60 | 48.0 | 18.0 | 6 |

| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|------------------------|---------------------------|------------------------------|---|
| SC22601 | Tamper-Proof Torx® T45 | 48.0 | 18.0 | 6 |
| SC22602 | Tamper-Proof Torx® T50 | 48.0 | 18.0 | 6 |
| SC22603 | Tamper-Proof Torx® T55 | 48.0 | 18.0 | 6 |
| SC22604 | Tamper-Proof Torx® T60 | 48.0 | 18.0 | 6 |



















16 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09520 | 10 - 6pt. Metric Sockets 8, 10, 12, 13, 14, 17, 19, 21, 22, 24 mm 6 - 6pt. Metric Deep Sockets 10, 12, 14, 17, 19, 21 mm | 8 |

15 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09525SJ | 1 - Quick-Release Round Head Ratchet 13 - 6pt. Metric Sockets 10, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24 mm 1 - Wobble Extension Bar 5" | 2 |





17 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09086SJ | 1 - Quick-Release Ratchet 13 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 1 - Spark Plug Socket 16 mm | 6 |
| | 2 - Accessories Wobble Extension 5" Flex Handle 10" | |

18 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09203SJ | 1 - Quick-Release Ratchet 14 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 24, 27, 30, 32 mm 3 - Accessories Wobble Extensions 5", 10" T-Handle | 6 |





18 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09204SJ | 1 - Quick-Release Ratchet 14 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 19, 21, 24, 27, 30, 32 mm 3 - Accessories Wobble Extensions 5", 10" T-Handle | 6 |

23 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09005SJ | 1 - Quick-Release Ratchet 16 - 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30, 32, 34 mm 3 - 6pt. Metric Deep Sockets 13, 17, 19 mm 3 - Accessories Wobble Extension Bar 10" Universal Joint 1/2"Fx3/8"M 3-Way Adapter | 4 |





23 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09526 | 1 - Quick-Release Round Head Ratchet 15 - 6pt. Metric Sockets 10, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24, 27, 30, 32, 34 mm 4 - 6pt. Metric Deep Sockets 12, 14, 17, 19 mm 2 - Spark Plug Sockets 16, 21 mm 1 - Extension Bar 10" | 4 |

24 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09060-6SJ | 1 - Quick-Release Ratchet 19 - 6pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm 4 - Accessories Wobble Extension 5", 10" Univeresal Joint T-Handle | 4 |





24 Pc. 1/2" Drive 12 Point Metric Socket Set

Article Code Content 1 - Quick-Release Ratchet 19 - 12pt. Metric Sockets 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm 4 - Accessories Wobble Extension Bars 5", 10" Universal Joint T-Handle

25 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09092ME-12 | 1 - Quick-Release Ratchet 20 - 12pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 27, 30, 32 mm 1 - Spark Plug Socket 21 mm | 4 |
| | 3 - Accessories Wobble Extension 10" Universal Joint Flex handle | |





28 Pc. 1/2" Drive 12 Point Metric Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09090SJ | 1 - Quick-Release Ratchet 21 - 12pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32 mm 6 - Accessories Wobble Extensions 5", 10" Flex Handle 10" T-Handle Universal Joint Speed Handle | 4 |



60 Pc. 1/2" Drive 6 Point Metric Socket Set

| Article Code | Content | 6 |
|--------------|---|---|
| ST09007SJ | 1- Quick-Release Ratchet 17- 6pt. Metric Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32 mm 10- 6pt. Metric Deep Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 18- 1/4' Shank 25L Bits Pozidriv #1, #2, #3 Hex 2, 3, 4, 5, 6, 7, 8 Torx® 18, T10, T15, T20, T25, T27, T30, T40 6- 1/4' Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 8- Accessories Spark Plug Sockets 16, 21 mm Wobble Extension Bars 5", 10" Universal Joint 3/8"Fx1/2"M 3-Way Adapter 1/4" Bit Adapter 1/4" Dr. Socket Driver | 3 |



20 Pc. 1/2" Drive 6 and 12 Point SAE Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09087SJ | 1 - Quick-Release Ratchet 8 - 6pt. SAE Sockets 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4" 7 - 12pt. SAE Sockets 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4" 4 - Accessories Wobble Extensions 5", 10" Flex Handle 15" 3/8"F x1/2"M 3-Way Adapter | 4 |



22 Pc. 1/2" Drive 12 Point SAE Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09088SJ | 1 - Quick-Release Ratchet 15 - 12pt. SAE Sockets 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4" 6 - Accessories Wobble Extension Bars 5", 10" T-Handle Universal Joint Flex handle 10" Quick rocker | 3 |



46 Pc. 1/2" Drive 6 Point Metric/SAE Socket Set


| Article Code | Content | |
|--------------|---|---|
| ST09006SJ | 1 - Quick-Release Ratchet 20 - 6pt. Metric Sockets 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32, 34 mm 7 - 6pt. Metric Deep Sockets 10, 12, 13, 14, 15, 17, 19 mm 11 - 6pt. SAE Sockets 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1" 2 - Metric Spark Plug Sockets 16, 21 mm 5 - Accessories Flex Handle 10" Wobble Extensions 5", 10" Universal Joint 3/8"F x1/2"M 3-Way Adapter | 3 |



1/2" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- · Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 6 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST13319SC | 8.0 mm | 38.0 | 22.2 | 13.3 | 6 |
| ST13320SC | 9.0 mm | 38.0 | 22.2 | 14.3 | 6 |
| ST13301SC | 10.0 mm | 38.0 | 22.2 | 15.3 | 6 |
| ST13302SC | 11.0 mm | 38.0 | 22.2 | 16.5 | 6 |
| ST13303SC | 12.0 mm | 38.0 | 22.2 | 17.8 | 6 |
| ST13304SC | 13.0 mm | 38.0 | 22.2 | 19.0 | 6 |
| ST13305SC | 14.0 mm | 38.0 | 22.2 | 20.3 | 6 |
| ST13306SC | 15.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13307SC | 16.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13308SC | 17.0 mm | 38.0 | 23.9 | 23.9 | 6 |
| ST13309SC | 18.0 mm | 38.0 | 24.9 | 24.9 | 6 |
| ST13310SC | 19.0 mm | 38.0 | 25.9 | 24.0 | 6 |
| ST13311SC | 20.0 mm | 38.0 | 27.8 | 24.0 | 4 |
| ST13312SC | 21.0 mm | 38.0 | 27.9 | 24.0 | 4 |
| ST13313SC | 22.0 mm | 38.0 | 29.9 | 26.0 | 4 |
| ST13314SC | 23.0 mm | 40.0 | 31.1 | 26.0 | 4 |
| ST13315SC | 24.0 mm | 40.0 | 31.9 | 26.0 | 4 |
| ST13316SC | 27.0 mm | 40.0 | 35.9 | 29.0 | 4 |
| ST13324 | 28.0 mm | 40.0 | 37.6 | 30.0 | 4 |
| ST13317SC | 30.0 mm | 42.0 | 39.9 | 33.0 | 2 |
| ST13318SC | 32.0 mm | 42.0 | 41.9 | 34.0 | 2 |
| ST13321SC | 34.0 mm | 42.0 | 43.9 | 35.0 | 2 |
| ST13101SC | 5/16" | 37.8 | 22.2 | 13.3 | 6 |
| ST13102SC | 3/8" | 37.8 | 22.2 | 14.5 | 6 |
| ST13103SC | 7/16" | 37.8 | 22.2 | 17.0 | 6 |
| ST13104SC | 1/2" | 37.8 | 22.2 | 18.6 | 6 |
| ST13105SC | 9/16" | 37.8 | 22.2 | 20.6 | 6 |
| ST13106SC | 5/8" | 37.8 | 22.2 | 22.2 | 6 |
| ST13107SC | 11/16" | 37.8 | 23.8 | 23.8 | 6 |
| ST13108SC | 3/4" | 37.8 | 25.9 | 25.9 | 6 |
| ST13109SC | 13/16" | 37.8 | 27.9 | 27.9 | 4 |
| ST13110SC | 7/8" | 37.8 | 29.9 | 29.9 | 4 |
| ST13111SC | 15/16" | 37.8 | 31.9 | 31.9 | 4 |
| ST13112SC | 1" | 40.0 | 33.9 | 33.9 | 4 |
| ST13113SC | 1.1/16" | 40.0 | 35.9 | 35.9 | 4 |
| ST13114SC | 1.1/8" | 42.0 | 37.9 | 37.9 | 4 |
| ST13115SC | 1.1/4" | 42.0 | 41.9 | 41.9 | 2 |

1/2" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 4 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST13619SC | 8.0 mm | 38.0 | 22.2 | 13.3 | 6 |
| ST13620SC | 9.0 mm | 38.0 | 22.2 | 14.3 | 6 |
| ST13601SC | 10.0 mm | 38.0 | 22.2 | 15.3 | 6 |
| ST13602SC | 11.0 mm | 38.0 | 22.2 | 16.5 | 6 |
| ST13603SC | 12.0 mm | 38.0 | 22.2 | 17.8 | 6 |
| ST13604SC | 13.0 mm | 38.0 | 22.2 | 19.0 | 6 |
| ST13605SC | 14.0 mm | 38.0 | 22.2 | 20.3 | 6 |
| ST13606SC | 15.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13607SC | 16.0 mm | 38.0 | 22.2 | 22.2 | 6 |
| ST13608SC | 17.0 mm | 38.0 | 23.9 | 23.9 | 6 |
| ST13609SC | 18.0 mm | 38.0 | 24.9 | 24.9 | 6 |
| ST13610SC | 19.0 mm | 38.0 | 25.9 | 24.0 | 6 |
| ST13611SC | 20.0 mm | 38.0 | 27.8 | 24.0 | 4 |
| ST13612SC | 21.0 mm | 38.0 | 27.9 | 24.0 | 4 |
| ST13613SC | 22.0 mm | 38.0 | 29.9 | 26.0 | 4 |
| ST13614SC | 23.0 mm | 40.0 | 31.1 | 26.0 | 4 |
| ST13615SC | 24.0 mm | 40.0 | 31.9 | 26.0 | 4 |
| ST13616SC | 27.0 mm | 40.0 | 35.9 | 29.0 | 4 |
| ST13617SC | 30.0 mm | 42.0 | 39.9 | 33.0 | 2 |
| ST13618SC | 32.0 mm | 42.0 | 41.9 | 34.0 | 2 |
| ST13501SC | 5/16" | 37.8 | 22.2 | 13.3 | 6 |
| ST13502SC | 3/8" | 37.8 | 22.2 | 14.5 | 6 |
| ST13503SC | 7/16" | 37.8 | 22.2 | 17.0 | 6 |
| ST13504SC | 1/2" | 37.8 | 22.2 | 18.6 | 6 |
| ST13505SC | 9/16" | 37.8 | 22.2 | 20.6 | 6 |
| ST13506SC | 5/8″ | 37.8 | 22.2 | 22.2 | 6 |
| ST13507SC | 11/16" | 37.8 | 23.8 | 23.8 | 6 |
| ST13508SC | 3/4" | 37.8 | 25.9 | 25.9 | 4 |
| ST13509SC | 13/16" | 37.8 | 27.9 | 27.9 | 4 |
| ST13510SC | 7/8" | 37.8 | 29.9 | 29.9 | 4 |
| ST13511SC | 15/16" | 37.8 | 31.9 | 31.9 | 4 |
| ST13512SC | 1" | 40.0 | 33.9 | 33.9 | 4 |
| ST13513SC | 1.1/16" | 40.0 | 35.9 | 35.9 | 4 |
| ST13514SC | 1.1/8" | 42.0 | 37.9 | 37.9 | 4 |
| ST13515SC | 1.1/4" | 42.0 | 41.9 | 41.9 | 2 |

1/2" Drive 6 Point Deep Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- · Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST13401SC | 10.0 mm | 77.0 | 22.0 | 15.3 | 6 |
| ST13402SC | 11.0 mm | 77.0 | 22.0 | 16.5 | 6 |
| ST13403SC | 12.0 mm | 77.0 | 22.0 | 17.8 | 6 |
| ST13404SC | 13.0 mm | 77.0 | 22.0 | 19.0 | 6 |
| ST13405SC | 14.0 mm | 77.0 | 22.0 | 20.3 | 6 |
| ST13406SC | 15.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13407SC | 16.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13408SC | 17.0 mm | 77.0 | 23.8 | 23.8 | 6 |
| ST13409SC | 18.0 mm | 77.0 | 24.8 | 24.8 | 6 |
| ST13410SC | 19.0 mm | 77.0 | 25.8 | 25.8 | 6 |
| ST13411SC | 20.0 mm | 77.0 | 27.8 | 27.8 | 4 |
| ST13412SC | 21.0 mm | 77.0 | 27.8 | 27.8 | 4 |
| ST13413SC | 22.0 mm | 77.0 | 29.8 | 29.8 | 4 |
| ST13414SC | 24.0 mm | 77.0 | 31.8 | 31.8 | 4 |
| ST13415SC | 27.0 mm | 77.0 | 35.8 | 35.8 | 4 |
| ST13416SC | 30.0 mm | 77.0 | 39.8 | 39.8 | 2 |
| ST13417SC | 32.0 mm | 77.0 | 41.8 | 41.8 | 2 |
| ST13201SC | 3/8" | 77.0 | 22.0 | 14.5 | 6 |
| ST13202SC | 7/16" | 77.0 | 22.0 | 17.0 | 6 |
| ST13203SC | 1/2" | 77.0 | 22.0 | 18.6 | 6 |
| ST13204SC | 9/16" | 77.0 | 22.0 | 20.6 | 6 |
| ST13205SC | 5/8" | 77.0 | 22.0 | 22.0 | 6 |
| ST13206SC | 11/16" | 77.0 | 23.8 | 23.8 | 6 |
| ST13207SC | 3/4" | 77.0 | 25.8 | 25.8 | 6 |
| ST13208SC | 13/16" | 77.0 | 27.8 | 27.8 | 4 |
| ST13209SC | 7/8" | 77.0 | 29.8 | 29.8 | 4 |
| ST13210SC | 15/16" | 77.0 | 31.8 | 31.8 | 4 |
| ST13211SC | 1" | 77.0 | 33.8 | 33.8 | 4 |
| ST13212SC | 1.1/16" | 77.0 | 35.8 | 35.8 | 4 |
| ST13213SC | 1.1/8" | 77.0 | 37.8 | 37.8 | 4 |
| SC13214 | 1.1/4" | 77.0 | 41.8 | 41.8 | 6 |

1/2" Drive 12 Point Deep Socket

- Double hex (12 pt.) fastener end design
- · Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- · Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110









These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST13810 | 10.0 mm | 77.0 | 22.0 | 15.3 | 6 |
| ST13812 | 12.0 mm | 77.0 | 22.0 | 17.8 | 6 |
| ST13813 | 13.0 mm | 77.0 | 22.0 | 19.0 | 6 |
| ST13814 | 14.0 mm | 77.0 | 22.0 | 20.3 | 6 |
| ST13816 | 16.0 mm | 77.0 | 22.0 | 22.0 | 6 |
| ST13817 | 17.0 mm | 77.0 | 23.8 | 23.8 | 6 |
| ST13818 | 18.0 mm | 77.0 | 24.8 | 24.8 | 6 |
| ST13819 | 19.0 mm | 77.0 | 25.8 | 25.8 | 6 |

1/2" Drive 6 Point VDE Insulated Socket

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Red socket base color for quick identification of VDE
- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110









| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|---------------------------------|-------------------------------|----|
| ST14010SC | 10.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14011SC | 11.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14012SC | 12.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14013SC | 13.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14014SC | 14.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14016SC | 16.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14017SC | 17.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14018SC | 18.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14019SC | 19.0 mm | 55.0 | 22.0 | 27.0 | 12 |
| ST14021SC | 21.0 mm | 55.0 | 22.0 | 27.0 | 10 |
| ST14022SC | 22.0 mm | 55.0 | 22.0 | 27.0 | 10 |
| ST14024SC | 24.0 mm | 55.0 | 22.0 | 27.0 | 10 |

1/2" Drive 6 Point VDE Insulated Hexagon Socket



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Red socket base color for quick identification of VDE
- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Fastener Size | Length (mm) | Width (mm) | Hight (mm) | 6 |
|--------------|---------------|-------------|------------|------------|----|
| ST24404IEC | 4.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24405IEC | 5.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24406IEC | 6.0 mm | 117.0 | 22.0 | 27.0 | 6 |
| ST24408IEC | 8.0 mm | 117.0 | 22.0 | 27.0 | 18 |
| ST24410IEC | 10.0 mm | 117.0 | 22.0 | 27.0 | 18 |

1/2" Drive Spark Plug Sockets

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110






| Article Code | Fastener Size | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|---------------|-------------|------------|------------|---|
| ST13915SC | 16.0 mm | 64.0 | 45.0 | 22.0 | 4 |
| ST13916SC | 21.0 mm | 70.0 | 46.0 | 27.0 | 4 |
| ST13917SC | 5/8" | 64.0 | 45.0 | 22.9 | 4 |
| ST13918SC | 13/16″ | 70.0 | 46.0 | 27.0 | 4 |

1/2" Drive External Torx® Socket

- Off-corner loading design reduces fastener rounding
- · Large markings offer easy size identification
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds Camcar TXF-701







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST13701SC | E10 | 38.0 | 22.0 | 13.3 | 6 |
| ST13702SC | E12 | 38.0 | 22.0 | 15.0 | 6 |
| ST13703SC | E14 | 38.0 | 22.0 | 17.0 | 6 |
| ST13704SC | E16 | 38.0 | 22.0 | 19.0 | 6 |
| ST13705SC | E18 | 38.0 | 23.8 | 21.0 | 6 |
| ST13706SC | E20 | 38.0 | 25.8 | 23.5 | 4 |
| ST13707SC | E22 | 38.0 | 25.8 | 25.8 | 4 |
| ST13708SC | E24 | 40.0 | 27.8 | 27.8 | 4 |

1/2" Drive Quick-Release Stubby Ratchet

- Stubby handle length for improved access
- · Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13960SC | 194.0 | 6 |

1/2" Drive Quick-Release Round Head Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13901SC | 244.0 | 4 |

1/2" Drive Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the ratchet
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13971ST | 250.0 | 4 |



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13972ST | 250.0 | 4 |

1/2" Drive Heavy Duty Offset Quick-Release Teardrop Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Offset handle design provides knuckle clearance in tight access application
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13970SC | 261.0 | 4 |

2022

1/2" Drive 120XP Ratchet

- Designed with 120 positions providing a 3° swing arc so you can turn fasteners in tighter confines
- Designed with two double stacked 60-tooth pawls for exceptional strength
- Enclosed ratchet head design resists dirt infiltration for continuous and efficient execution
- Up to 50% thinner than conventional ratchet systems
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | 6 |
|--------------|-------------|----|
| ST13974 | 250.0 | 10 |

1/2" Drive Extendable Ratchet

- Quick release design allows rapid socket removal
- 60-tooth design requires as little as 6° of swing arc to move a fastener
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Extends from 300 to 440 mm to reach hard-to-reach fasteners (6 positions)
- Ergonomic dual material improves grip and torque while reducing hand fatigue
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110

| Article Code | Length (mm) | |
|--------------|---------------|---|
| ST13992BU | 300.0 - 440.0 | 4 |

1/2" Insulated Quick-Release Teardrop Ratchet

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12983SC | 250.0 | 6 |

1/2" Drive Flex Handle / Breaker Bar

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13909SC | 10" | 254 | 4 |
| ST13911SC | 15" | 375 | 4 |
| ST13951SC | 17" | 432 | 4 |

1/2" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13910SC | 250.0 | 4 |

1/2" Drive Speed Handle

- Free rotating top handle grip delivers ultra-fast action for tightening and removing fasteners
- · Ball detent for secure socket retention
- Knurled grip for comfort and control
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST17001SC | 410.0 | 6 |

1/2" Drive Offset Handle

- 10" L-Shaped handle for better leverage and torque to break free stubborn fasteners
- Ball detent helps to secure the socket to the wrench
- Offset handles ideal for working in cramped areas
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13919SC | 260.0 | 4 |

1/2" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13912SC | 68.2 | 4 |

1/2" Drive Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110




These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13913SC | 3/8" | 35.1 | 4 |
| ST13950SC | 3/4" | 35.1 | 4 |

1/2" Drive Bit Adapter

- Precise fit for bit in adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





1/2" Drive 3-Way Adapter 3/8"

- 3 Position adapter
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST13930SC | 43.6 | 4 |

1/2" Drive Wobble Extensions

- Wobble extension for better reach to more fasteners
- Provides better angled access versus standard non-wobble extension bars
- Knurled grip provides a nonslip surface
- · Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13904SC | 5″ | 127.0 | 4 |
| ST13905SC | 10" | 254.0 | 4 |

1/2" Drive Locking Extensions

- · Locking extension for better reach to more fasteners
- · Locking mechanism securely attaches socket to extension
- Knurled grip provides a nonslip surface
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST13906SC | 3" | 76.2 | 4 |
| ST13907SC | 5" | 127.0 | 4 |
| ST13908SC | 10" | 254.0 | 4 |





1/2" Insulated Extension



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Extension for better reach to more fasteners
- Ball detent for secure socket retention
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110






These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST12985SC | 55.0 | 6 |

1/2" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|------------------------------|------------------------------|---|
| ST24201SC | Hex 4.0 mm | 75.0 | 24.0 | 6 |
| ST24202SC | Hex 5.0 mm | 75.0 | 24.0 | 6 |
| ST24203SC | Hex 6.0 mm | 75.0 | 24.0 | 6 |
| ST24204SC | Hex 7.0 mm | 75.0 | 24.0 | 6 |
| ST24205SC | Hex 8.0 mm | 75.0 | 24.0 | 6 |
| ST24206SC | Hex 10.0 mm | 75.0 | 24.0 | 6 |
| ST24207SC | Hex 12.0 mm | 75.0 | 24.0 | 6 |
| ST24208SC | Hex 14.0 mm | 75.0 | 24.0 | 6 |
| ST24209SC | Hex 17.0 mm | 75.0 | 24.0 | 6 |
| ST24401BU | Hex 1/4" | 75.0 | 24.0 | 6 |
| ST24402BU | Hex 5/16" | 75.0 | 24.0 | 6 |
| ST24403BU | Hex 3/8" | 75.0 | 24.0 | 6 |
| ST24404BU | Hex 7/16" | 75.0 | 24.0 | 6 |
| ST24405BU | Hex 1/2" | 75.0 | 24.0 | 6 |
| ST24406BU | Hex 9/16" | 75.0 | 24.0 | 6 |
| ST24407BU | Hex 5/8" | 75.0 | 24.0 | 6 |




Continued on next page

Continued from previous page

1/2" Drive Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|---------------|---------------------------|------------------------------|---|
| ST24101SC | Torx® T20 | 75.0 | 24.0 | 6 |
| ST24102SC | Torx® T25 | 75.0 | 24.0 | 6 |
| ST24103SC | Torx® T27 | 75.0 | 24.0 | 6 |
| ST24104SC | Torx® T30 | 75.0 | 24.0 | 6 |
| ST24105SC | Torx® T40 | 75.0 | 24.0 | 6 |
| ST24106SC | Torx® T45 | 75.0 | 24.0 | 6 |
| ST24107SC | Torx® T50 | 75.0 | 24.0 | 6 |
| ST24108SC | Torx® T55 | 75.0 | 24.0 | 6 |
| ST24109SC | Torx® T60 | 75.0 | 24.0 | 6 |



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|-------------------|------------------------------|---------------------------------|---|
| ST24801SC | Triple Square M5 | 75.0 | 24.0 | 6 |
| ST24802SC | Triple Square M6 | 75.0 | 24.0 | 6 |
| ST24803SC | Triple Square M8 | 75.0 | 24.0 | 6 |
| ST24804SC | Triple Square M10 | 75.0 | 24.0 | 6 |
| ST24805SC | Triple Square M12 | 75.0 | 24.0 | 6 |
| ST24806SC | Triple Square M14 | 75.0 | 24.0 | 6 |
| ST24807SC | Triple Square M16 | 75.0 | 24.0 | 6 |





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

9 Pc. 1/2" Drive Hex Bit Socket Set


| Article Code | Size | Length (mm) | Content | |
|--------------|---------|-------------|--|----|
| ST09057-02 | Hex 10" | 254.0 | 9 - Bit Sockets Hex 4, 5, 6, 7, 8, 10, 12, 14, 17 mm | 12 |





1/2" Drive Long Bit Sockets

- Precison engineered bits for a better fit on fasteners
- Long socket to reach more fasteners
- Large stamped size markings provide quick size identification
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- S2 steel insert bits offer maximum strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | 4 |
|--------------|---------------|-------------------------------------|------------------------------|---|
| SC25201 | Hex 4.0 mm | 125.0 | 24.0 | 6 |
| SC25202 | Hex 5.0 mm | 125.0 | 24.0 | 6 |
| SC25203 | Hex 6.0 mm | 125.0 | 24.0 | 6 |
| SC25204 | Hex 7.0 mm | 125.0 | 24.0 | 6 |
| SC25205 | Hex 8.0 mm | 125.0 | 24.0 | 6 |
| SC25206 | Hex 10.0 mm | 125.0 | 24.0 | 6 |
| SC25207 | Hex 12.0 mm | 125.0 | 24.0 | 6 |
| SC25208 | Hex 14.0 mm | 125.0 | 24.0 | 6 |
| SC25209 | Hex 17.0 mm | 125.0 | 24.0 | 6 |



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | 6 |
|--------------|---------------|------------------------------|------------------------------|---|
| SC25101 | Torx® T20 | 125.0 | 24.0 | 6 |
| SC25102 | Torx® T25 | 125.0 | 24.0 | 6 |
| SC25103 | Torx® T27 | 125.0 | 24.0 | 6 |
| SC25104 | Torx® T30 | 125.0 | 24.0 | 6 |
| ST25105SC | Torx® T40 | 125.0 | 24.0 | 6 |
| SC25106 | Torx® T45 | 125.0 | 24.0 | 6 |
| SC25107 | Torx® T50 | 125.0 | 24.0 | 6 |
| SC25108 | Torx® T55 | 125.0 | 24.0 | 6 |
| SC25109 | Torx® T60 | 125.0 | 24.0 | 6 |



| Article Code | Fastener Size | Length (mm) (Dimension B) | Drive End (mm) (Dimension A) | |
|--------------|-------------------|------------------------------|---------------------------------|---|
| SC25801 | Triple Square M5 | 125.0 | 24.0 | 6 |
| SC25802 | Triple Square M6 | 125.0 | 24.0 | 6 |
| SC25803 | Triple Square M8 | 125.0 | 24.0 | 6 |
| SC25804 | Triple Square M10 | 125.0 | 24.0 | 6 |
| SC25805 | Triple Square M12 | 125.0 | 24.0 | 6 |
| SC25806 | Triple Square M14 | 125.0 | 24.0 | 6 |
| SC25807 | Triple Square M16 | 125.0 | 24.0 | 6 |






15 Pc. 3/4" Drive 12 Point Socket Set

| Article Code | Description | Content | |
|--------------|---|--|---|
| ST09015SJ | 15 Pc. 3/4" Drive 12 Point Metric Socket Set | 1 - Quick-Release Ratchet 10 - 12pt. Metric Sockets 30, 32, 34, 36, 38, 41, 46, 50, 55, 60 mm 4 - Accessories T-Handle Extensions Bars 4", 8" Universal Joint | 1 |
| ST09148SJ | 15 Pc. 3/4" Drive 12 Point SAE Socket Set | 1 - Quick-Release Ratchet 10 - 12pt. Metric Sockets 1", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" 4 - Accessories T-Handle Extensions Bars 4", 8" Universal Joint | 1 |



3/4" Drive 6 Point Socket

- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110







These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------|-----------------------------------|---------------------------------|-------------------------------|---|
| ST16401SC | 19.0 mm | 47.5 | 36.0 | 28.5 | 6 |
| ST16402SC | 21.0 mm | 49.5 | 36.0 | 31.5 | 6 |
| ST16403SC | 22.0 mm | 49.5 | 36.0 | 32.5 | 6 |
| ST16404SC | 23.0 mm | 49.5 | 36.0 | 33.5 | 6 |
| ST16405SC | 24.0 mm | 49.5 | 36.0 | 34.5 | 6 |
| ST16406SC | 25.0 mm | 50.0 | 36.2 | 35.0 | 6 |
| ST16407SC | 26.0 mm | 50.0 | 37.2 | 36.0 | 6 |

Continued on next page

| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|----------|-----------------------------------|------------------------------|-------------------------------|---|
| ST16408SC | 27.0 mm | 52.0 | 38.2 | 36.0 | 6 |
| ST16409SC | 28.0 mm | 52.0 | 39.2 | 36.0 | 6 |
| ST16410SC | 29.0 mm | 52.0 | 40.2 | 38.0 | 6 |
| ST16411SC | 30.0 mm | 54.0 | 42.2 | 38.0 | 6 |
| ST16412SC | 32.0 mm | 56.0 | 44.2 | 38.0 | 6 |
| ST16413SC | 33.0 mm | 56.0 | 46.2 | 38.0 | 6 |
| ST16414SC | 34.0 mm | 56.0 | 47.2 | 38.0 | 6 |
| ST16415SC | 35.0 mm | 56.0 | 48.2 | 42.0 | 6 |
| ST16416SC | 36.0 mm | 58.0 | 50.2 | 42.0 | 6 |
| ST16417SC | 38.0 mm | 60.0 | 52.5 | 45.0 | 4 |
| ST16418SC | 41.0 mm | 64.0 | 56.0 | 45.0 | 4 |
| ST16419SC | 46.0 mm | 68.0 | 62.0 | 48.0 | 4 |
| ST16420SC | 50.0 mm | 72.0 | 68.0 | 48.0 | 2 |
| ST16421SC | 55.0 mm | 76.0 | 74.0 | 48.0 | 2 |
| ST16422SC | 60.0 mm | 78.0 | 80.0 | 48.0 | 2 |
| ST16301SC | 3/4" | 49.5 | 36.0 | 29.5 | 6 |
| ST16302SC | 13/16" | 49.5 | 36.0 | 31.5 | 6 |
| ST16303SC | 7/8" | 49.5 | 36.0 | 32.5 | 6 |
| ST16304SC | 15/16" | 49.5 | 36.0 | 34.5 | 6 |
| ST16305SC | 1" | 50.0 | 36.0 | 35.0 | 6 |
| ST16306SC | 1.1/16" | 52.0 | 37.8 | 36.0 | 6 |
| ST16307SC | 1.1/8" | 54.0 | 39.8 | 36.0 | 6 |
| ST16308SC | 1.3/16" | 54.0 | 41.8 | 38.0 | 6 |
| ST16309SC | 1.1/4" | 56.0 | 44.2 | 38.0 | 6 |
| ST16310SC | 1.5/16" | 56.0 | 46.2 | 38.0 | 6 |
| ST16311SC | 1.3/8" | 56.0 | 48.2 | 42.0 | 6 |
| ST16312SC | 1.7/16" | 60.0 | 48.2 | 42.0 | 6 |
| ST16313SC | 1.1/2" | 60.0 | 50.2 | 42.0 | 4 |
| ST16320SC | 1.9/16" | 60.0 | 52.5 | 45.0 | 4 |
| ST16314SC | 1.5/8" | 64.0 | 53.5 | 45.0 | 4 |
| ST16315SC | 1.11/16" | 68.0 | 56.0 | 45.0 | 4 |
| ST16316SC | 1.3/4" | 68.0 | 57.0 | 45.0 | 4 |
| ST16317SC | 1.13/16" | 68.0 | 60.5 | 45.0 | 4 |
| ST16318SC | 1.7/8" | 72.0 | 63.5 | 48.0 | 2 |
| ST16319SC | 2" | 73.0 | 68.0 | 48.0 | 2 |
| ST16321SC | 2.1/16" | 74.0 | 70.5 | 48.0 | 2 |
| ST16322SC | 2.1/8" | 76.0 | 72.0 | 48.0 | 2 |
| ST16323SC | 2.1/4" | 80.0 | 76.0 | 48.0 | 2 |

3/4" Drive 12 Point Socket

- Double hex (12 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Double line (SAE) & knurled line (MM) to easily identify standard and metric sockets
- Manufactured to industrial specifications assuring a thin wall design with precise nut end dimensions
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------|-----------------------------------|------------------------------|-------------------------------|---|
| ST16602SC | 19.0 mm | 47.5 | 36.0 | 28.5 | 6 |
| ST16603SC | 21.0 mm | 49.5 | 36.0 | 31.5 | 6 |
| ST16604SC | 22.0 mm | 49.5 | 36.0 | 32.5 | 6 |
| ST16605SC | 23.0 mm | 49.5 | 36.0 | 33.5 | 6 |
| ST16606SC | 24.0 mm | 49.5 | 36.0 | 34.5 | 6 |
| ST16607SC | 25.0 mm | 50.0 | 36.2 | 35.0 | 6 |
| ST16608SC | 26.0 mm | 50.0 | 37.2 | 36.0 | 6 |
| ST16609SC | 27.0 mm | 52.0 | 38.2 | 36.0 | 6 |
| ST16610SC | 28.0 mm | 52.0 | 39.2 | 36.0 | 6 |
| ST16611SC | 29.0 mm | 52.0 | 40.2 | 38.0 | 6 |
| ST16612SC | 30.0 mm | 54.0 | 42.2 | 38.0 | 6 |
| ST16613SC | 32.0 mm | 56.0 | 44.2 | 38.0 | 6 |
| ST16614SC | 33.0 mm | 56.0 | 46.2 | 38.0 | 6 |
| ST16615SC | 34.0 mm | 56.0 | 47.2 | 38.0 | 6 |
| ST16616SC | 35.0 mm | 56.0 | 48.2 | 42.0 | 6 |
| ST16617SC | 36.0 mm | 58.0 | 50.2 | 42.0 | 6 |
| ST16618SC | 38.0 mm | 60.0 | 52.5 | 45.0 | 4 |
| ST16619SC | 41.0 mm | 64.0 | 56.0 | 45.0 | 4 |
| ST16620SC | 46.0 mm | 68.0 | 62.0 | 48.0 | 4 |
| ST16622SC | 50.0 mm | 72.0 | 68.0 | 48.0 | 2 |
| ST16623SC | 55.0 mm | 76.0 | 74.0 | 48.0 | 2 |
| ST16624SC | 60.0 mm | 78.0 | 80.0 | 48.0 | 2 |

| Article Code | Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|----------|-----------------------------------|---------------------------------|-------------------------------|---|
| ST16504SC | 15/16" | 49.5 | 36.0 | 34.5 | 6 |
| ST16501SC | 3/4" | 49.5 | 36.0 | 29.5 | 6 |
| ST16502SC | 13/16" | 49.5 | 36.0 | 31.5 | 6 |
| ST16503SC | 7/8" | 49.5 | 36.0 | 32.5 | 6 |
| ST16505SC | 1" | 50.0 | 36.0 | 35.0 | 6 |
| ST16506SC | 1.1/16" | 52.0 | 37.8 | 36.0 | 6 |
| ST16507SC | 1.1/8" | 54.0 | 39.8 | 36.0 | 6 |
| ST16508SC | 1.3/16" | 54.0 | 41.8 | 38.0 | 6 |
| ST16509SC | 1.1/4" | 56.0 | 44.2 | 38.0 | 6 |
| ST16510SC | 1.5/16" | 56.0 | 46.2 | 38.0 | 6 |
| ST16511SC | 1.3/8" | 56.0 | 48.2 | 42.0 | 6 |
| ST16512SC | 1.7/16" | 60.0 | 48.2 | 42.0 | 6 |
| ST16513SC | 1.1/2" | 60.0 | 50.2 | 42.0 | 4 |
| ST16520SC | 1.9/16" | 60.0 | 52.5 | 45.0 | 4 |
| ST16514SC | 1.5/8" | 64.0 | 53.5 | 45.0 | 4 |
| ST16515SC | 1.11/16" | 68.0 | 56.0 | 45.0 | 4 |
| ST16516SC | 1.3/4" | 68.0 | 57.0 | 45.0 | 4 |
| ST16517SC | 1.13/16" | 68.0 | 60.5 | 45.0 | 4 |
| ST16518SC | 1.7/8" | 72.0 | 63.5 | 48.0 | 2 |
| ST16519SC | 2" | 73.0 | 68.0 | 48.0 | 2 |
| ST16521SC | 2.1/16" | 74.0 | 70.5 | 48.0 | 2 |
| ST16522SC | 2.1/8" | 76.0 | 72.0 | 48.0 | 2 |
| ST16523SC | 2.1/4" | 80.0 | 76.0 | 48.0 | 2 |

3/4" Drive Quick-Release Teardrop Ratchet

- · Quick release design allows rapid socket removal
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16901SC | 500.0 | 1 |

3/4" Drive Flex Handle / Breaker Bar 19"

- Handle for more leverage to break stubborn fasteners free
- Flex head drive for multiple angles of use
- One-Piece alloy steel construction for rugged performance
- Ball detent helps to secure the socket to the drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16906SC | 450.0 | 1 |

3/4" Drive T-Handle

- Sliding T-Handle provides more leverage to break free stubborn fasteners
- Ball detent for secure socket retention
- Allows for use with one hand on each side of drive tang
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16905SC | 450.0 | 1 |

3/4" Drive Offset Handle

- 13" L-Shaped handle for better leverage and torque to break free stubborn fasteners
- Ball detent helps to secure the socket to the wrench
- Offset handles ideal for working in cramped areas
- · Chrome vanadium alloy steel (Cr-V) for exceptional
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16919SC | 380.0 | 4 |

3/4" Drive Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16907SC | 75.2 | 3 |

3/4" Drive Adapter 1/2"

- Pin hole can be used with detent pin for secure socket retention to the adapter
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110





These sockets accessories should never be used on power drivers, pneumatic impact wrench and/or extenders.

| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST16908SC | 35.1 | 6 |


3/4" Drive Standard Extension Bar

- Locking extension for better reach to more fasteners
- · Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST16902SC | 4" | 102.0 | 6 |
| ST16903SC | 8" | 203.0 | 3 |
| ST16904SC | 16" | 406.0 | 2 |



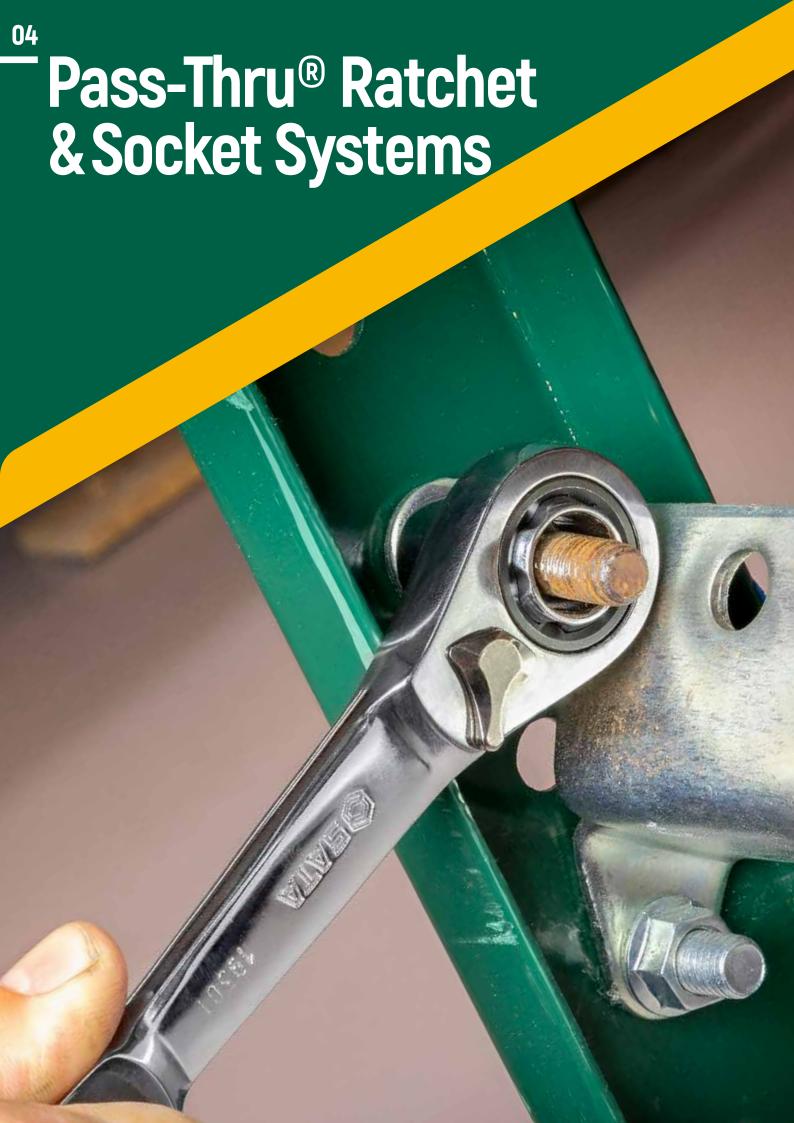

30 Pc. 1/4" and 3/8" Drive 6 Point Metric Pass-Thru® Socket Set

| Article Code | Content | 6 |
|--------------|---|---|
| ST09132SJ | 1-1/4" Dr. Pass-Thru® Ratchet 1-3/8" Dr. Pass-Thru® Ratchet 13-1/4" Dr. Metric Pass-Thru® Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 10-3/8" Dr. Metric Pass-Thru® Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 5- Accessories 1/4" Dr. Pass-Thru® Extension Bar 3" 1/4" Dr. Quick-Release Adapter 3/8" Dr. x1/4"M Quick-Release Adapter 3/8" Dr. x3/8"M Quick-Release Adapter | 4 |









21 Pc. 3/8" Drive 6 Point Metric/SAE Pass-Thru® Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST09134SJ | 1 - Pass-Thru® Ratchet 10 - Metric Pass-Thru® Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm 7 - SAE Pass-Thru® Sockets 3/8, 7/16, 1/2, 5/8, 9/16, 11/16, 3/4" 3 - Accessories 3/8" Dr. x1/4"M Quick-Release Adapter 3/8" Dr. x3/8"M Quick-Release Adapter Pass-Thru® Extension Bar 3" | 3 |




25 Pc. 1/4" Drive 6 Point Metric/SAE Pass-Thru® Socket Set

| Article Code | Content | |
|--------------|--|---|
| ST09131SJ | 1 - Pass-Thru® Ratchet 13 - Metric Pass-Thru® Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 9 - SAE Pass-Thru® Sockets 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8, 7/16, 1/2" 2 - Accessories Quick-Release Adapter Pass-Thru® Extension Bar 3" | 6 |



ST09137 ST09138

1/4" AND 3/8" DRIVE METRIC/SAE BOLTBITER SETS







Flush reversing lever



Removes rusted and rounded fasteners



Innovative tapered flutes



Bi-directional design



Dual sized sockets

SAE

METRIC

1/4"

3/8"





13 Pc. 1/4" and 3/8" Drive Metric/SAE BoltBiter Set

- Ratchet with quick release design allows rapid socket removal
- Ratchet flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Removes rusted and rounded fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- Up to 5 times greater gripping force
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Comes with a durable blow mold case for storage and organization

| Article Code | Content | |
|--------------|---|---|
| ST09137 | 1 - 3/8" Dr. Quick-Release Ratchet 2 - 1/4" Extraction Sockets 7, 8 mm 8 - 3/8" Extraction Sockets 10, 11, 12, 13, 14, 16, 17, 19 mm 2 - Accessories 3/8" Drive Wobble Extension Bar 6" 3/8" Drive Adapter 3/8"FX1/4"M | 4 |



23 PC. 1/4" and 3/8" Drive Metric/SAE BoltBiter Set

- Ratchet with quick release design allows rapid socket removal
- Ratchet flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Removes rusted and rounded fasteners
- Minus-sized sockets designed to fit extremely worndown fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- Up to 5 times greater gripping force
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Comes with a durable blow mold case for storage and organization

| Article Code | Content | |
|--------------|--|---|
| ST09138 | 1 - 3/8" Dr. Quick-Release Ratchet 2 - 1/4" Extraction Sockets 7, 8 mm 2 - 1/4" Minus Sized Extraction Sockets -7, -8 mm 8 - 3/8" Extraction Sockets 10, 11, 12, 13, 14, 16, 17, 19 mm 8 - 3/8" Minus Sized Extraction Sockets -10, -11, -12, -13, -14, -16, -17, -19 mm 2 - Accessories 3/8" Drive Wobble Extension Bar 6" 3/8" Drive Adapter 3/8"FX1/4"M | 4 |



BoltBiter Extraction Socket

- Removes rusted and rounded fasteners
- Minus-sized sockets designed to fit extremely worn-down fasteners
- Innovative tapered flutes for easy seating onto a damaged fastener
- Bi-directional design removes or tightens damaged fasteners
- Dual sized sockets work with both SAE and metric fasteners
- Hexagonal base for use with impact guns, ratchets, wrenches, or pliers
- High-visibility laser-etched markings for quick size identification
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Black oxide finish to resist corrosion
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Drive Size | Overall Length (mm) (Dimension C) | Wrench End (mm) (Dimension B) | |
|--------------|-------------------|------------|-----------------------------------|----------------------------------|---|
| SC12801 | -7.0 mm | 1/4" | 37.5 | 18.0 | 6 |
| SC12802 | 7.0 mm | 1/4" | 37.5 | 18.0 | 6 |
| SC12803 | -8.0 mm / -5/16" | 1/4" | 37.5 | 18.0 | 6 |
| SC12804 | 8.0 mm / 5/16" | 1/4" | 37.5 | 18.0 | 6 |
| SC12807 | -10.0 mm | 3/8" | 37.5 | 21.4 | 6 |
| SC12808 | 10.0 mm | 3/8" | 37.5 | 21.4 | 6 |
| SC12809 | -11.0 mm / -7/16" | 3/8" | 37.5 | 21.4 | 6 |
| SC12810 | 11.0 mm / 7/16" | 3/8" | 37.5 | 21.4 | 6 |
| SC12811 | -12.0 mm | 3/8" | 37.5 | 21.4 | 6 |
| SC12812 | 12.0 mm | 3/8" | 37.5 | 21.4 | 6 |
| SC12814 | -13.0 mm / -1/2" | 3/8" | 37.5 | 21.4 | 6 |
| SC12815 | 13.0 mm / 1/2" | 3/8" | 37.5 | 21.4 | 6 |
| SC12816 | -14.0 mm / -9/16" | 3/8" | 37.5 | 22.0 | 6 |
| SC12817 | 14.0 mm / 9/16" | 3/8" | 37.5 | 22.0 | 6 |
| SC12820 | -16.0 mm / -5/8" | 3/8" | 37.5 | 24.0 | 6 |
| SC12821 | 16.0 mm / 5/8" | 3/8" | 37.5 | 24.0 | 6 |
| SC12822 | -17.0 mm | 3/8" | 37.5 | 24.0 | 6 |
| SC12823 | 17.0 mm | 3/8" | 37.5 | 26.0 | 6 |
| SC12826 | -19.0 mm / -3/4" | 3/8" | 37.5 | 28.0 | 6 |
| SC12827 | 19.0 mm / 3/4" | 3/8" | 37.5 | 28.0 | 6 |







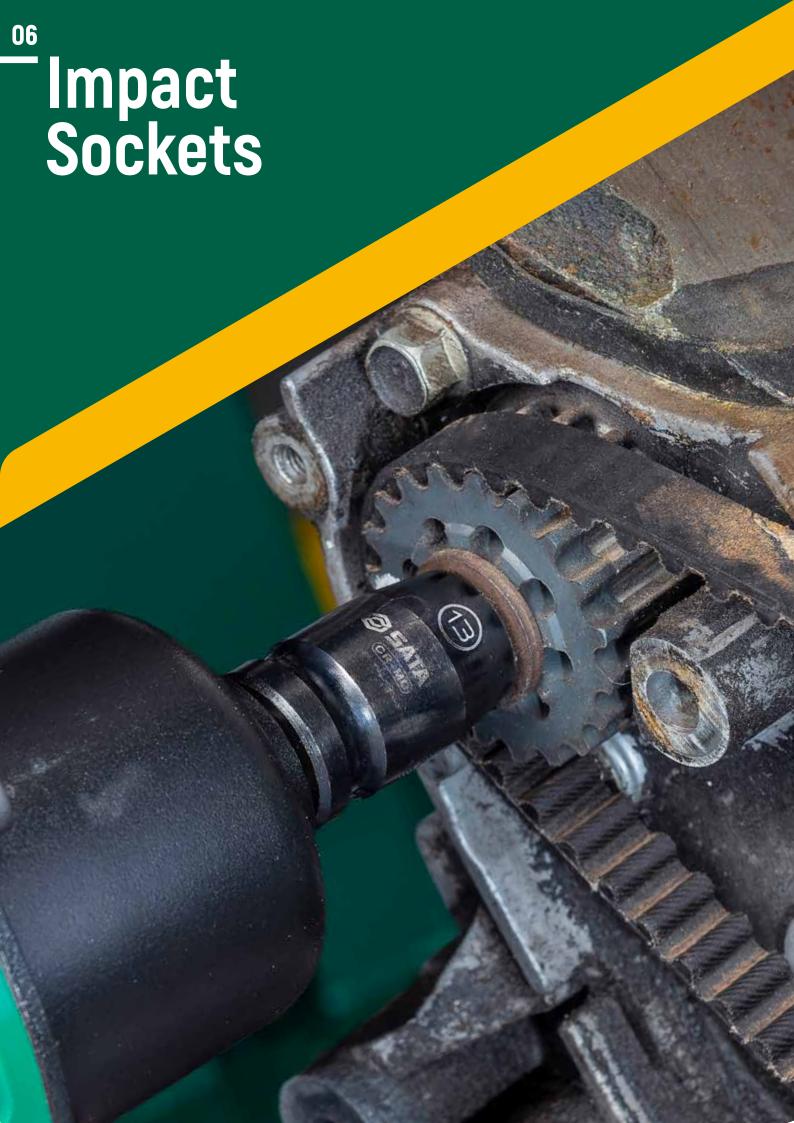

1/4" Drive Impact Adapter 1/4"F X 3/8"M

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST34714SC | 26.5 | 6 |

3/8" Drive Impact Adapter 3/8"F X 1/2"M

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST34715SC | 36.0 | 6 |

3/8" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- · Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST32902 | 53.0 | 6 |

3/8" Drive Impact Extension


- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST34701SC | 3" | 75.0 | 6 |
| ST34702SC | 6" | 150.0 | 6 |

3/8" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110





| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34201BU | 6.0 mm | 28.0 | 10.6 | 18.8 | 6 |
| ST34202SC | 7.0 mm | 28.0 | 11.6 | 18.8 | 6 |
| ST34203SC | 8.0 mm | 28.0 | 12.8 | 18.8 | 6 |
| SC34204 | 9.0 mm | 28.0 | 14.2 | 18.8 | 6 |
| ST34205SC | 10.0 mm | 28.0 | 15.9 | 18.8 | 6 |
| ST34206SC | 11.0 mm | 28.0 | 17.1 | 18.8 | 6 |
| ST34207SC | 12.0 mm | 28.0 | 18.5 | 18.8 | 6 |
| ST34208SC | 13.0 mm | 30.0 | 20.0 | 19.8 | 6 |
| ST34209SC | 14.0 mm | 30.0 | 21.0 | 21.8 | 6 |
| SC34210 | 15.0 mm | 30.0 | 21.0 | 22.0 | 6 |
| ST34211SC | 16.0 mm | 30.0 | 22.0 | 23.8 | 6 |
| ST34212SC | 17.0 mm | 30.0 | 22.0 | 24.8 | 6 |
| SC34213 | 18.0 mm | 30.0 | 22.0 | 25.8 | 6 |
| ST34214SC | 19.0 mm | 30.0 | 22.0 | 26.8 | 6 |

12 Pc. 1/2" Drive 6 Point Metric **Impact Socket Set**

| Article Code | Content | |
|--------------|--|---|
| ST09009SJ | 10 - 6pt. Metric Impact Sockets 10, 11, 13, 14, 17, 19, 21, 22, 23, 24 mm 2 - Accessories Impact Universal Joint Impact Extension Bar 5" | 8 |

14 Pc. 1/2" Drive 6 Point Metric Thin **Wall Impact Socket Set**

| Article Code | Content | |
|--------------|---|----|
| ST34397T | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24 mm | 12 |
| | | |



Excluded from Lifetime Warranty terms





13 Pc. 1/2" Drive 6 Point Metric Deep Thin Wall Impact Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST34398T | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm | 6 |
| | | |
| | | |

12 Pc. 1/2" Drive 6 Point SAE Impact **Socket Set**

| Article Code | Content | |
|--------------|--|----|
| ST09008SJ | 10 - 6pt. SAE Impact Sockets 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1" 2 - Accessories Impact Universal Joint Impact Extension Bar 5" | 10 |



Excluded from Lifetime Warranty terms





26 PC. 1/2" DRIVE 6 POINT ST34399T METRIC STANDARD & DEEP THIN WALL IMPACT SOCKET SET



Thin wall socket design




For use with impact drivers



Single hex (6 pt.) fastener end



Sockets feature Standard & off-corner loading




deep sockets



Large easy ID size markings

METRIC

1/2"

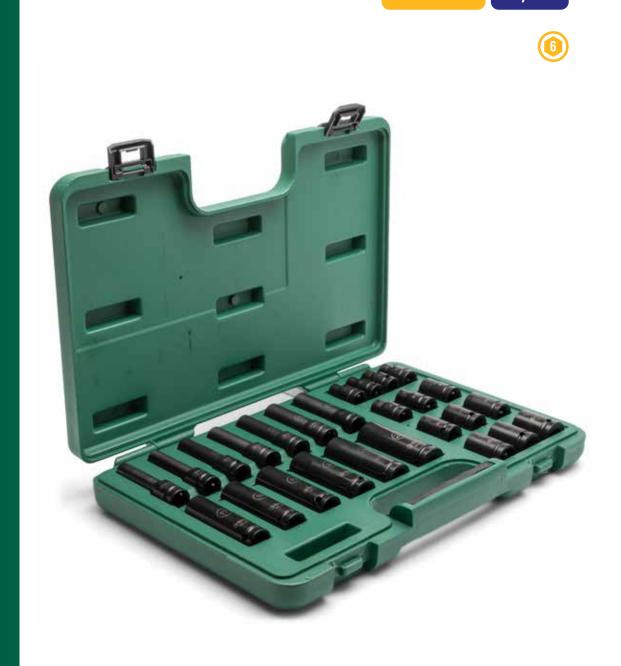

26 Pc. 1/2" Drive 6 Point Metric Standard & Deep Thin Wall Impact Socket Set

| Article Code | Content | |
|--------------|---|---|
| ST34399T | 13 - 6pt. Metric Thin Wall Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 13 - 6pt. Metric Thin Wall Deep Impact Sockets 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm | 5 |



Excluded from Lifetime Warranty terms



1/2" Drive Impact Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|---------------|-------------|----|
| ST34716SC | 1/2"F X 3/8"M | 38.0 | 20 |
| ST34717SC | 1/2"F X 3/4"M | 45.0 | 6 |

1/2" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST34719SC | 65.5 | 6 |

1/2" Drive Impact Extension

- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- · Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110




| Article Code | Size | Length (mm) | |
|--------------|----------|-------------|---|
| ST33911SC | 3" | 75.0 | 4 |
| ST34703SC | 5" 125.0 | | 6 |
| ST34704SC | 6" | 150.0 | 6 |
| ST34705SC | 10" | 250.0 | 6 |
| ST34706SC | 12" | 300.0 | 6 |

1/2" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34303SC | 10.0 mm | 38.0 | 24.8 | 14.5 | 6 |
| ST34304SC | 11.0 mm | 38.0 | 24.8 | 15.4 | 6 |
| ST34305SC | 12.0 mm | 38.0 | 24.8 | 17.8 | 6 |
| ST34306SC | 13.0 mm | 38.0 | 24.8 | 18.3 | 6 |
| ST34307SC | 14.0 mm | 38.0 | 24.8 | 19.5 | 6 |
| ST34308SC | 15.0 mm | 38.0 | 24.8 | 20.4 | 6 |
| ST34309SC | 16.0 mm | 38.0 | 24.8 | 21.8 | 6 |
| ST34310SC | 17.0 mm | 38.0 | 25.8 | 23.2 | 6 |
| ST34311SC | 18.0 mm | 38.0 | 27.8 | 24.6 | 4 |
| ST34312SC | 19.0 mm | 41.0 | 29.8 | 27.2 | 4 |
| ST34314SC | 21.0 mm | 41.0 | 31.8 | 27.4 | 4 |
| ST34315SC | 22.0 mm | 41.0 | 31.8 | 30.0 | 4 |
| ST34316SC | 23.0 mm | 41.0 | 33.8 | 30.0 | 4 |
| ST34317SC | 24.0 mm | 41.0 | 33.8 | 30.0 | 4 |

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 6 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34320SC | 27.0 mm | 41.0 | 37.8 | 30.0 | 4 |
| ST34322SC | 29.0 mm | 41.0 | 41.8 | 31.0 | 2 |
| ST34323SC | 30.0 mm | 41.0 | 41.8 | 32.0 | 2 |
| ST34325SC | 32.0 mm | 41.0 | 43.8 | 34.0 | 2 |
| ST33101SC | 7/16" | 38.0 | 24.8 | 17.5 | 6 |
| ST33102SC | 1/2" | 38.0 | 24.8 | 20.5 | 6 |
| ST33103SC | 9/16" | 38.0 | 24.8 | 21.7 | 6 |
| ST33104SC | 5/8" | 38.0 | 24.8 | 23.2 | 6 |
| ST33105SC | 11/16" | 38.0 | 25.8 | 24.6 | 6 |
| ST33106SC | 3/4" | 41.0 | 29.8 | 27.2 | 4 |
| ST33107SC | 13/16" | 41.0 | 31.8 | 28.4 | 4 |
| ST33108SC | 7/8" | 41.0 | 31.8 | 30.0 | 4 |
| ST33109SC | 15/16" | 41.0 | 35.8 | 30.0 | 4 |
| ST33110SC | 1" | 41.0 | 37.8 | 30.0 | 4 |


1/2" Drive 6 Point Thin Wall Impact Socket

- Thin wall socket design for access in spaces standard sockets will not fit
- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



Excluded from Lifetime Warranty terms








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 6 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| SC34303T | 10.0 mm | 38.0 | 21.8 | 15.3 | 6 |
| SC34304T | 11.0 mm | 38.0 | 21.8 | 16.5 | 6 |
| SC34305T | 12.0 mm | 38.0 | 21.8 | 17.8 | 6 |
| SC34306T | 13.0 mm | 38.0 | 23.8 | 19.0 | 6 |
| SC34307T | 14.0 mm | 38.0 | 23.8 | 20.3 | 6 |
| SC34308T | 15.0 mm | 38.0 | 23.8 | 21.5 | 6 |
| SC34309T | 16.0 mm | 38.0 | 23.8 | 22.8 | 6 |
| SC34310T | 17.0 mm | 38.0 | 23.8 | 23.2 | 6 |
| SC34311T | 18.0 mm | 38.0 | 24.8 | 24.6 | 4 |
| SC34312T | 19.0 mm | 41.0 | 25.8 | 27.2 | 4 |
| SC34314T | 21.0 mm | 41.0 | 27.8 | 28.4 | 4 |
| SC34315T | 22.0 mm | 41.0 | 29.5 | 30.0 | 4 |
| SC34316T | 23.0 mm | 41.0 | 31.1 | 30.0 | 4 |
| SC34317T | 24.0 mm | 41.0 | 31.8 | 30.0 | 4 |
| SC34320T | 27.0 mm | 41.0 | 35.8 | 32.5 | 4 |

1/2" Drive 6 Point Impact Deep Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34403SC | 10.0 mm | 82.0 | 24.3 | 14.7 | 6 |
| ST34404SC | 11.0 mm | 82.0 | 24.3 | 15.7 | 6 |
| ST34405SC | 12.0 mm | 82.0 | 24.3 | 18.1 | 6 |
| ST34406SC | 13.0 mm | 82.0 | 24.3 | 18.9 | 6 |
| ST34407SC | 14.0 mm | 82.0 | 24.3 | 20.6 | 4 |
| ST34408SC | 15.0 mm | 82.0 | 24.3 | 21.5 | 6 |
| ST34409SC | 16.0 mm | 82.0 | 24.3 | 22.8 | 6 |
| ST34410SC | 17.0 mm | 82.0 | 25.8 | 23.2 | 6 |
| ST34411SC | 18.0 mm | 82.0 | 27.8 | 24.6 | 6 |
| ST34412SC | 19.0 mm | 82.0 | 29.8 | 27.2 | 4 |
| ST34414SC | 21.0 mm | 82.0 | 31.3 | 28.4 | 4 |
| ST34415SC | 22.0 mm | 82.0 | 31.8 | 30.0 | 4 |
| ST34417SC | 24.0 mm | 82.0 | 33.8 | 30.0 | 4 |
| ST34419SC | 26.0 mm | 82.0 | 37.8 | 30.0 | 4 |
| ST34420SC | 27.0 mm | 82.0 | 37.8 | 30.0 | 4 |
| ST34422SC | 29.0 mm | 82.0 | 39.8 | 31.0 | 2 |
| ST34423SC | 30.0 mm | 82.0 | 41.8 | 32.0 | 2 |
| ST34425SC | 32.0 mm | 82.0 | 43.8 | 34.0 | 2 |

1/2" Drive 6 Point Thin Wall Impact Deep Socket

- Thin wall socket design for access in spaces standard sockets will not fit
- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110









Excluded from Lifetime Warranty terms

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | 6 |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| SC34403T | 10.0 mm | 82.0 | 21.8 | 15.3 | 6 |
| SC34404T | 11.0 mm | 82.0 | 21.8 | 16.5 | 6 |
| SC34405T | 12.0 mm | 82.0 | 21.8 | 17.8 | 6 |
| SC34406T | 13.0 mm | 82.0 | 23.8 | 19.0 | 6 |
| SC34407T | 14.0 mm | 82.0 | 23.8 | 20.3 | 6 |
| SC34408T | 15.0 mm | 82.0 | 23.8 | 21.5 | 6 |
| SC34409T | 16.0 mm | 82.0 | 23.8 | 22.8 | 6 |
| SC34410T | 17.0 mm | 82.0 | 23.8 | 23.2 | 6 |
| SC34411T | 18.0 mm | 82.0 | 24.8 | 24.6 | 6 |
| SC34412T | 19.0 mm | 82.0 | 25.8 | 27.2 | 4 |
| SC34414T | 21.0 mm | 82.0 | 27.8 | 28.4 | 4 |
| SC34415T | 22.0 mm | 82.0 | 29.5 | 30.0 | 4 |
| SC34417T | 24.0 mm | 82.0 | 31.8 | 30.0 | 4 |
| SC34420T | 27.0 mm | 82.0 | 35.8 | 30.0 | 4 |

3/4" Drive Impact Adapter

- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- · Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|---------------|-------------|---|
| ST34718SC | 3/4"F X 1/2"M | 56.0 | 6 |
| ST34721SC | 3/4"F X 1"M | 57.0 | 4 |

3/4" Drive Impact Universal Joint

- Universal joint for better access to hard-to-reach fasteners
- Pin hole can be used with detent pin for secure socket retention to the adapter
- For use with impact drivers
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Length (mm) | |
|--------------|-------------|---|
| ST34720SC | 88.5 | 6 |

3/4" Drive Impact Extension


- Extension for better reach to more fasteners
- For use with impact drivers
- Ball detent for secure socket retention
- · Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|------|-------------|---|
| ST34708SC | 4" | 100.0 | 3 |
| ST34712SC | 10" | 250.0 | 1 |

3/4" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability






| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34505SC | 17.0 mm | 51.0 | 30.0 | 38.0 | 6 |
| ST34506SC | 18.0 mm | 51.0 | 31.0 | 38.0 | 6 |
| ST34507SC | 19.0 mm | 51.0 | 32.0 | 38.0 | 6 |

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34508SC | 20.0 mm | 51.0 | 33.0 | 38.0 | 6 |
| ST34509SC | 21.0 mm | 51.0 | 34.0 | 38.0 | 6 |
| ST34510SC | 22.0 mm | 51.0 | 35.0 | 38.0 | 6 |
| ST34511SC | 23.0 mm | 51.0 | 36.0 | 38.0 | 6 |
| ST34512SC | 24.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34513SC | 25.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34514SC | 26.0 mm | 51.0 | 38.0 | 38.0 | 6 |
| ST34515SC | 27.0 mm | 53.0 | 40.0 | 40.0 | 6 |
| ST34516SC | 28.0 mm | 53.0 | 40.0 | 40.0 | 6 |
| ST34517SC | 29.0 mm | 53.0 | 42.0 | 42.0 | 6 |
| ST34518SC | 30.0 mm | 53.0 | 44.0 | 44.0 | 6 |
| ST34519SC | 31.0 mm | 53.0 | 48.0 | 44.0 | 6 |
| ST34520SC | 32.0 mm | 57.0 | 48.0 | 44.0 | 6 |
| ST34521SC | 33.0 mm | 57.0 | 48.0 | 44.0 | 6 |
| ST34522SC | 34.0 mm | 57.0 | 51.0 | 44.0 | 6 |
| ST34523SC | 35.0 mm | 57.0 | 50.0 | 44.0 | 6 |
| ST34524SC | 36.0 mm | 57.0 | 52.0 | 44.0 | 6 |
| ST34525SC | 37.0 mm | 57.0 | 55.0 | 44.0 | 6 |
| ST34526SC | 38.0 mm | 57.0 | 56.0 | 44.0 | 6 |
| ST34527SC | 39.0 mm | 57.0 | 58.0 | 44.0 | 6 |
| ST34528SC | 40.0 mm | 57.0 | 59.0 | 44.0 | 6 |
| ST34529SC | 41.0 mm | 57.0 | 60.0 | 44.0 | 6 |
| ST34530 | 42.0 mm | 57.0 | 61.0 | 44.0 | 6 |
| ST33501BU | 3/4" | 51.0 | 32.0 | 38.0 | 6 |
| ST33502BU | 13/16" | 51.0 | 34.0 | 38.0 | 6 |
| ST33503BU | 7/8" | 51.0 | 35.0 | 38.0 | 6 |
| ST33504BU | 15/16" | 51.0 | 38.0 | 38.0 | 6 |
| ST33505BU | 1" | 51.0 | 38.0 | 38.0 | 6 |
| ST33506BU | 1.1/16" | 53.0 | 40.0 | 40.0 | 6 |
| ST33507BU | 1.1/8" | 53.0 | 42.0 | 42.0 | 6 |
| ST33508BU | 1.3/16" | 53.0 | 44.0 | 44.0 | 6 |
| ST33509BU | 1.1/4" | 57.0 | 48.0 | 44.0 | 6 |
| ST33510BU | 1.5/16" | 57.0 | 48.0 | 44.0 | 6 |
| ST33511BU | 1.3/8" | 57.0 | 50.0 | 44.0 | 6 |
| ST33512BU | 1.7/16" | 57.0 | 52.0 | 44.0 | 6 |
| ST33513BU | 1.1/2" | 57.0 | 56.0 | 44.0 | 6 |
| ST33514BU | 1.9/16" | 57.0 | 59.0 | 44.0 | 6 |
| ST33515BU | 1.5/8″ | 57.0 | 60.0 | 44.0 | 6 |

3/4" Drive 6 Point Deep Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110








| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST34605SC | 17.0 mm | 90.0 | 44.0 | 30.0 | 1 |
| ST34606SC | 18.0 mm | 90.0 | 44.0 | 31.0 | 1 |
| ST34607SC | 19.0 mm | 90.0 | 44.0 | 33.0 | 1 |
| ST34608SC | 20.0 mm | 90.0 | 44.0 | 34.0 | 1 |
| ST34609SC | 21.0 mm | 90.0 | 44.0 | 35.0 | 1 |
| ST34610SC | 22.0 mm | 90.0 | 44.0 | 37.0 | 1 |
| ST34611SC | 23.0 mm | 90.0 | 44.0 | 38.0 | 1 |
| ST34612SC | 24.0 mm | 90.0 | 44.0 | 39.0 | 1 |
| ST34613SC | 25.0 mm | 90.0 | 44.0 | 40.0 | 1 |
| ST34614SC | 26.0 mm | 90.0 | 44.0 | 41.0 | 1 |
| ST34615SC | 27.0 mm | 90.0 | 44.0 | 43.0 | 1 |
| ST34616SC | 28.0 mm | 90.0 | 44.0 | 44.0 | 1 |
| ST34617SC | 29.0 mm | 90.0 | 44.0 | 45.0 | 1 |
| ST34618SC | 30.0 mm | 90.0 | 44.0 | 46.0 | 1 |
| ST34619SC | 31.0 mm | 90.0 | 44.0 | 48.0 | 1 |
| ST34620SC | 32.0 mm | 90.0 | 44.0 | 49.0 | 1 |
| ST34621SC | 33.0 mm | 90.0 | 44.0 | 51.0 | 1 |
| ST34622SC | 34.0 mm | 90.0 | 44.0 | 51.0 | 1 |
| ST34623SC | 35.0 mm | 90.0 | 44.0 | 53.0 | 1 |
| ST34624SC | 36.0 mm | 90.0 | 44.0 | 54.0 | 1 |
| ST34625SC | 37.0 mm | 90.0 | 44.0 | 55.0 | 1 |
| ST34626SC | 38.0 mm | 90.0 | 44.0 | 56.0 | 1 |
| ST34628SC | 40.0 mm | 90.0 | 44.0 | 59.0 | 1 |
| ST34629SC | 41.0 mm | 90.0 | 44.0 | 60.0 | 1 |
| SC34630 | 42.0 mm | 90.0 | 44.0 | 61.0 | 1 |
| SC34631 | 43.0 mm | 90.0 | 44.0 | 63.0 | 1 |
| SC34634 | 46.0 mm | 90.0 | 44.0 | 66.0 | 1 |
| SC34635 | 47.0 mm | 90.0 | 44.0 | 68.0 | 1 |
| SC34636 | 48.0 mm | 90.0 | 44.0 | 69.0 | 1 |
| SC34637 | 49.0 mm | 90.0 | 44.0 | 70.0 | 1 |
| SC34638 | 50.0 mm | 90.0 | 54.0 | 71.0 | 1 |
| SC34640 | 55.0 mm | 90.0 | 54.0 | 78.0 | 1 |

1" Drive 6 Point Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|---------------------------------|-------------------------------|---|
| ST34824SC | 36.0 mm | 66.0 | 54.0 | 56.5 | 4 |
| ST34825SC | 37.0 mm | 66.0 | 54.0 | 58.0 | 4 |
| ST34826SC | 38.0 mm | 66.0 | 54.0 | 59.0 | 4 |
| ST34827SC | 39.0 mm | 66.0 | 54.0 | 60.0 | 4 |
| ST34828SC | 40.0 mm | 66.0 | 54.0 | 61.0 | 4 |
| ST34829SC | 41.0 mm | 68.0 | 54.0 | 62.5 | 4 |
| ST34830SC | 42.0 mm | 68.0 | 54.0 | 64.0 | 4 |
| ST34831SC | 43.0 mm | 70.0 | 54.0 | 65.0 | 4 |
| ST34832SC | 44.0 mm | 70.0 | 54.0 | 66.0 | 4 |
| ST34833SC | 45.0 mm | 70.0 | 54.0 | 67.5 | 4 |
| ST34834SC | 46.0 mm | 72.0 | 54.0 | 69.0 | 4 |
| ST34835SC | 47.0 mm | 72.0 | 54.0 | 70.0 | 4 |
| ST34836SC | 48.0 mm | 76.0 | 54.0 | 71.5 | 4 |
| ST34837SC | 49.0 mm | 76.0 | 54.0 | 73.0 | 4 |
| ST34838SC | 50.0 mm | 76.0 | 54.0 | 74.0 | 4 |
| ST34839SC | 51.0 mm | 76.0 | 54.0 | 75.0 | 2 |
| ST34840SC | 52.0 mm | 80.0 | 54.0 | 76.5 | 2 |
| ST34841SC | 53.0 mm | 80.0 | 54.0 | 78.0 | 2 |
| ST34842SC | 54.0 mm | 80.0 | 54.0 | 79.0 | 2 |
| ST34843SC | 55.0 mm | 84.0 | 54.0 | 80.0 | 2 |
| ST34844SC | 56.0 mm | 84.0 | 54.0 | 81.5 | 2 |
| ST34845SC | 57.0 mm | 84.0 | 54.0 | 82.5 | 2 |
| ST34846SC | 58.0 mm | 84.0 | 54.0 | 84.0 | 1 |
| ST34847SC | 59.0 mm | 88.0 | 54.0 | 85.0 | 1 |
| ST34848SC | 60.0 mm | 88.0 | 54.0 | 86.5 | 1 |
| ST34849SC | 63.0 mm | 88.0 | 54.0 | 90.0 | 1 |
| ST34850SC | 65.0 mm | 92.0 | 54.0 | 92.5 | 1 |
| ST34851SC | 67.0 mm | 92.0 | 54.0 | 95.0 | 1 |
| ST34852SC | 68.0 mm | 96.0 | 54.0 | 96.5 | 1 |
| ST34853SC | 69.0 mm | 96.0 | 54.0 | 98.0 | 1 |
| ST33801BU | 1.7/16" | 66.0 | 54.0 | 56.5 | 4 |
| ST33802BU | 1.1/2" | 66.0 | 54.0 | 59.0 | 4 |
| ST33803BU | 1.9/16" | 66.0 | 54.0 | 61.0 | 4 |


Continued from previous page

| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|-------------------------------|---|
| ST33804BU | 1.5/8" | 68.0 | 54.0 | 62.5 | 4 |
| ST33805BU | 1.11/16" | 70.0 | 54.0 | 65.0 | 4 |
| ST33806BU | 1.3/4" | 70.0 | 60.3 | 67.5 | 4 |
| ST33807BU | 1.13/16" | 72.0 | 60.3 | 69.0 | 4 |
| ST33808BU | 1.7/8" | 72.0 | 60.3 | 70.0 | 4 |
| ST33809BU | 1.15/16" | 76.0 | 60.3 | 72.5 | 4 |
| ST33810BU | 2" | 76.0 | 60.3 | 74.0 | 2 |
| ST33811BU | 2.1/16" | 80.0 | 60.3 | 76.5 | 2 |
| ST33812BU | 2.1/8" | 80.0 | 60.3 | 79.0 | 2 |
| ST33813BU | 2.3/16" | 84.0 | 60.3 | 80.0 | 2 |
| ST33814BU | 2.1/4" | 84.0 | 60.3 | 82.5 | 1 |
| ST33815BU | 2.5/16" | 84.0 | 60.3 | 84.0 | 1 |
| ST33816BU | 2.3/8" | 84.0 | 60.3 | 86.5 | 1 |
| ST33817BU | 2.7/16" | 88.0 | 60.3 | 89.0 | 1 |
| ST33818BU | 2.1/2" | 88.0 | 60.3 | 91.5 | 1 |
| ST33819BU | 2.9/16" | 92.0 | 60.3 | 92.5 | 1 |
| ST33820BU | 2.5/8" | 92.0 | 60.3 | 95.0 | 1 |
| ST33821BU | 2.11/16" | 96.0 | 60.3 | 96.5 | 1 |
| ST33822BU | 2.3/4" | 96.0 | 60.3 | 99.0 | 1 |

1" Drive 6 Point Deep Impact Socket

- Single hex (6 pt.) fastener end design
- For use with impact drivers
- Off-corner loading design reduces fastener rounding
- Deep socket to reach more fasteners
- Large markings offer easy size identification
- Black oxide finish to resist corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.110







| Article Code | Fastener Size | Overall Length (mm) (Dimension C) | Drive End (mm) (Dimension A) | Wrench End (mm) (Dimension B) | |
|--------------|---------------|-----------------------------------|------------------------------|----------------------------------|---|
| ST34924SC | 36.0 mm | 90.0 | 54.0 | 57.0 | 1 |
| ST34925SC | 37.0 mm | 90.0 | 54.0 | 58.0 | 1 |
| ST34926SC | 38.0 mm | 90.0 | 54.0 | 59.0 | 1 |
| ST34928SC | 40.0 mm | 90.0 | 54.0 | 62.0 | 1 |
| ST34929SC | 41.0 mm | 90.0 | 54.0 | 63.0 | 1 |
| ST34930SC | 42.0 mm | 90.0 | 54.0 | 64.0 | 1 |
| ST34931SC | 43.0 mm | 90.0 | 54.0 | 66.0 | 1 |
| ST34934SC | 46.0 mm | 100.0 | 54.0 | 69.0 | 1 |
| ST34937SC | 49.0 mm | 100.0 | 54.0 | 73.0 | 1 |
| ST34938SC | 50.0 mm | 100.0 | 54.0 | 74.0 | 1 |
| ST34940SC | 55.0 mm | 100.0 | 54.0 | 81.0 | 1 |





6 Pc. Metric Combination Wrench Set 7 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|--------------------------|---|
| ST09018SJ | 8, 10, 12, 13, 14, 15 mm | 3 |

| Article Code | Content | |
|--------------|------------------------------|---|
| ST09030 | 8, 10, 12, 14, 17, 19, 21 mm | 4 |





7 Pc. Metric Combination Wrench Set 9 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|------------------------------|----|
| ST09070SJ | 8, 10, 12, 13, 14, 17, 19 mm | 12 |

| Article Code | Content | |
|--------------|--------------------------------------|---|
| ST09020SJ | 8, 10, 11, 12, 13, 14, 15, 17, 19 mm | 3 |





ST95410 ST95411

2 PC. REVERSIBLE WRENCH RACK UP TO 13 OR 16 WRENCHES



Holds metric or SAE wrenches



Adjustable design




Reinforced composite construction



Self-aligning, drop-in feature



Space-saving system



Fits up to 1" or 25 mm

METRIC

SAE



2 Pc. Reversible Wrench Rack

- Reversible wrench rack holds metric or SAE wrenches
- Adjustable design takes up 30% less space, allowing you to conveniently store your wrenches
- · Reinforced composite construction offers long-lasting durability
- Self-aligning, drop-in feature provides quick and easy access to your tools
- Space-saving system for compact storage in shallow drawers
- Fits up to 1" or 25 mm

| | Î | \ |
|---|---|---|
| _ | • | |

Excluded from Lifetime Warranty terms

| Article Code | Description | |
|--------------|-----------------------|----|
| ST95410 | For up to 13 Wrenches | 24 |
| ST95411 | For up to 16 Wrenches | 18 |



Article Code Content ST09064SJ 12 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 24 mm

11 Pc. Metric Combination Wrench Set 11 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09022SJ | 8, 9, 10, 11, 12, 13, 14, 15, 17, 19, 22 mm | 2 |





12 Pc. Metric Combination Wrench Set 12 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST09063 | 6, 8, 10, 12, 13, 14, 17, 19, 22, 24, 30, 32 mm | 12 |

| Article Code | Content | |
|--------------|---|----|
| ST08001SJ | 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 22 mm | 12 |





14 Pc. Metric Combination Wrench Set 14 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09026SJ | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 22, 24 mm | 3 |

| Article Code | Content | |
|--------------|---|---|
| ST09062-02 | 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm | 4 |





15 Pc. Metric Combination Wrench Set Wrench Set

17 Pc. Metric Offset Combination

| Article Code | Content | |
|--------------|---|---|
| ST08002SJ | 6, 7, 8, 9, 10, 11, 13, 14, 17, 19, 22, 24, 27, 30, 32 mm | 4 |

| Article Code | Content | |
|--------------|---|---|
| ST08018-02 | 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 mm | 4 |





23 Pc. Metric Combination Wrench Set 26 Pc. Metric Combination Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09027SJ | 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 27, 30, 32 mm | 4 |

| Article Code | Content | |
|--------------|---|---|
| ST09093 | 6, 7, 8, 9, 10, 11 ,12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32 mm | 1 |





6 Pc. SAE Combination Wrench Set 9 Pc. SAE Combination Wrench Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09017SJ | 5/16, 3/8, 7/16, 1/2, 9/16 , 5/8" | 3 |

| Article Code | Content | |
|--------------|---|---|
| ST09019SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4" | 3 |





11 Pc. SAE Combination Wrench Set 11 Pc. SAE Combination Wrench Set

| Article Code | Content | |
|--------------|--|----|
| ST09068SJ | 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1" | 12 |

| Article Code | Content | |
|--------------|---|---|
| ST09021SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8" | 2 |





14 Pc. SAE Combination Wrench Set 16 Pc. SAE Combination Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST09069SJ | 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4" | 4 |

| Article Code | Content | |
|--------------|---|---|
| ST09074SJ | 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16, 7/8, 15/16, 1, 1-1/16, 1-1/8, 1-1/4" | 4 |








Combination Wrench

- Combination wrenches feature open end & box end
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Combination wrenches feature a 15° offset box end for added knuckle clearance
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | 6 |
|--------------|---------|------------------|--------------|--------------|---|
| ST40233SC | 5.5 mm | 127.0 | 13.0 | 11.4 | 6 |
| ST40201SC | 6.0 mm | 127.0 | 13.0 | 11.4 | 6 |
| ST40202SC | 7.0 mm | 133.0 | 14.4 | 12.3 | 6 |
| ST40203SC | 8.0 mm | 140.0 | 16.5 | 13.6 | 6 |
| ST40204SC | 9.0 mm | 149.0 | 18.5 | 15.0 | 6 |
| ST40205SC | 10.0 mm | 159.0 | 20.5 | 16.0 | 6 |
| ST40206SC | 11.0 mm | 165.0 | 22.5 | 17.5 | 6 |
| ST40207SC | 12.0 mm | 171.0 | 25.0 | 18.5 | 6 |
| ST40208SC | 13.0 mm | 177.0 | 27.0 | 20.0 | 6 |
| ST40209SC | 14.0 mm | 190.0 | 19.0 | 21.5 | 6 |
| ST40210SC | 15.0 mm | 199.0 | 31.0 | 22.5 | 6 |
| ST40211SC | 16.0 mm | 208.0 | 33.0 | 24.0 | 6 |
| ST40212SC | 17.0 mm | 225.0 | 35.0 | 26.0 | 6 |
| ST40213SC | 18.0 mm | 237.0 | 37.0 | 26.6 | 6 |
| ST40214SC | 19.0 mm | 248.0 | 39.0 | 28.0 | 6 |
| ST40215SC | 20.0 mm | 265.0 | 42.0 | 30.0 | 4 |
| ST40216SC | 21.0 mm | 271.0 | 43.0 | 31.0 | 4 |
| ST40217SC | 22.0 mm | 293.0 | 45.3 | 32.0 | 4 |
| ST40218SC | 23.0 mm | 304.0 | 47.5 | 33.0 | 4 |
| ST40219SC | 24.0 mm | 316.0 | 49.0 | 34.0 | 4 |
| ST40220SC | 25.0 mm | 335.0 | 51.0 | 37.5 | 4 |
| ST40235SC | 26.0 mm | 348.0 | 54.0 | 37.5 | 4 |
| ST40221SC | 27.0 mm | 359.0 | 55.0 | 39.0 | 4 |
| ST40236SC | 28.0 mm | 402.0 | 62.5 | 42.6 | 2 |
| ST40237SC | 29.0 mm | 402.0 | 62.5 | 42.6 | 2 |
| ST40222SC | 30.0 mm | 415.0 | 65.0 | 43.0 | 2 |
| ST40223SC | 32.0 mm | 426.0 | 66.5 | 46.0 | 2 |
| ST40241SC | 34.0 mm | 476.0 | 71.0 | 50.0 | 2 |
| ST40242SC | 35.0 mm | 476.0 | 71.0 | 50.0 | 2 |
| ST40243SC | 36.0 mm | 501.0 | 79.0 | 55.5 | 2 |
| ST40244SC | 38.0 mm | 501.0 | 79.0 | 55.5 | 2 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|------------------|-----------------|-----------------|---|
| ST40245SC | 41.0 mm | 578.0 | 86.5 | 61.0 | 2 |
| ST40246SC | 42.0 mm | 578.0 | 86.5 | 61.0 | 2 |
| ST40248SC | 46.0 mm | 615.0 | 93.0 | 65.5 | 2 |
| ST40249SC | 48.0 mm | 654.0 | 100.0 | 74.5 | 2 |
| ST40250SC | 50.0 mm | 654.0 | 100.0 | 74.5 | 2 |
| ST40251SC | 55.0 mm | 670.0 | 109.0 | 80.0 | 2 |
| ST40252SC | 60.0 mm | 692.0 | 120.0 | 87.0 | 2 |
| ST40101SC | 1/4" | 127.0 | 13.0 | 11.4 | 6 |
| ST40102SC | 5/16" | 140.0 | 16.5 | 13.6 | 6 |
| ST40103SC | 3/8" | 159.0 | 20.5 | 16.0 | 6 |
| ST40104SC | 7/16" | 165.0 | 22.5 | 17.5 | 6 |
| ST40105SC | 1/2" | 177.0 | 27.0 | 20.0 | 6 |
| ST40106SC | 9/16" | 190.0 | 29.0 | 21.5 | 6 |
| ST40107SC | 5/8" | 208.0 | 33.0 | 24.0 | 6 |
| ST40108SC | 11/16" | 225.0 | 35.0 | 26.0 | 6 |
| ST40109SC | 3/4" | 248.0 | 29.0 | 28.0 | 6 |
| ST40110SC | 13/16" | 271.0 | 43.0 | 31.0 | 4 |
| ST40111SC | 7/8" | 293.0 | 45.3 | 32.0 | 4 |
| ST40112SC | 15/16" | 316.0 | 49.0 | 34.0 | 4 |
| ST40113SC | 1" | 335.0 | 51.0 | 37.5 | 4 |
| ST40114SC | 1-1/16" | 359.0 | 55.0 | 39.0 | 4 |
| ST40115SC | 1-1/8" | 402.0 | 65.5 | 42.6 | 2 |
| ST40116SC | 1-1/4" | 426.0 | 66.6 | 46.0 | 2 |
| ST40117SC | 1-5/16" | 476.0 | 71.0 | 50.0 | 2 |
| ST40118SC | 1-3/8" | 476.0 | 71.0 | 50.0 | 2 |
| ST40119SC | 1-7/16" | 501.0 | 79.0 | 55.5 | 2 |
| ST40120SC | 1-1/2" | 501.0 | 79.0 | 55.5 | 2 |
| ST40121SC | 1-5/8" | 578.0 | 86.5 | 61.0 | 2 |
| ST40122SC | 1-3/4" | 578.0 | 86.5 | 61.0 | 2 |
| ST40123SC | 1-7/8" | 615.0 | 93.0 | 65.5 | 2 |
| ST40124SC | 2" | 654.0 | 100.0 | 74.5 | 2 |

7 Pc. Metric XL X-Beam Combination Wrench Set

10 Pc. Metric XL X-Beam Combination Wrench Set

| Article Code | Content | |
|--------------|------------------------------|---|
| ST08017 | 8, 10, 12, 13, 14, 17, 19 mm | 4 |


| Article Code | Content | |
|--------------|--|---|
| ST08006SJ | 8, 10, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |





XL X-Beam Combination Wrench

- · Combination wrenches feature open end & box end
- X-Beam[™] design lets you apply force to the flat side of the wrench, reducing hand fatigue and increasing tourque output by 25%
- Off-corner loading design on box end provides better grip and reduces fastener rounding
- Combination wrenches feature a 15° offset box end for added knuckle clearance
- Up to 25% longer for improved access and leverage
- Hand and wrench contact area increased 5 times when operating
- Sleek head design enables access to tight spots where a ratchet will not fit
- · High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100







| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST40281SC | 8.0 mm | 147.0 | 18.5 | 13.6 | 6 |
| ST40282SC | 9.0 mm | 158.0 | 20.5 | 15.0 | 6 |
| ST40283SC | 10.0 mm | 166.0 | 23.2 | 16.1 | 6 |
| ST40284SC | 11.0 mm | 185.0 | 25.5 | 17.4 | 6 |
| ST40285SC | 12.0 mm | 196.0 | 27.5 | 18.5 | 6 |
| ST40286SC | 13.0 mm | 206.0 | 28.5 | 19.8 | 6 |
| ST40287SC | 14.0 mm | 222.0 | 32.5 | 21.5 | 6 |
| ST40288SC | 15.0 mm | 232.0 | 33.5 | 22.6 | 6 |
| ST40289SC | 16.0 mm | 242.0 | 35.5 | 24.0 | 6 |
| ST40290SC | 17.0 mm | 260.0 | 38.5 | 26.0 | 6 |
| ST40291SC | 18.0 mm | 269.0 | 39.0 | 26.6 | 6 |
| ST40292SC | 19.0 mm | 278.7 | 42.5 | 28.0 | 6 |

7 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|--|----|
| ST09073SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 19x21 mm | 12 |

7 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST09071SJ | 8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24 mm | 12 |





8 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08013 | 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 22 mm | 6 |

8 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST08014SJ | 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22 mm | 12 |





10 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08010 | 5.5 x 7, 8 x 10, 9 x 11, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 22, 24 x 27, 30 x 32 mm | 2 |

10 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08019-02 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 21x23, 24x27, 30x32 mm | 6 |





11 Pc. Metric Double Open End Wrench Set

| Article Code | Content | |
|--------------|--|---|
| ST08041 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 30x32 mm | 6 |

13 Pc. Metric Double Open End Wrench Set


| Article Code | Content | |
|--------------|---|---|
| ST09029SJ | 6 x 7, 8 x 10, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 21 x 23, 22 x 24, 23 x 26, 24 x 27, 30 x 32 mm | 4 |





Double Open End Wrench

- Double open end design with 2 sizes per wrench
- Sleek head design enables access to tight spots where a ratchet will not fit
- · High-visibility stamped markings provide quick size identification
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | 6 |
|--------------|------------|------------------|--------------|-----------------|---|
| ST41216SC | 5.5 x 7 mm | 124.0 | 16.5 | 12.5 | 6 |
| ST41201SC | 6x7 mm | 124.0 | 16.5 | 12.5 | 6 |
| ST41301SC | 8 x 9 mm | 137.0 | 18.8 | 16.7 | 6 |
| ST41202SC | 8 x 10 mm | 150.0 | 20.8 | 16.5 | 6 |
| ST41217SC | 9 x 11 mm | 150.0 | 23.0 | 20.8 | 6 |
| ST41302SC | 10 x 11 mm | 150.0 | 23.0 | 20.8 | 6 |
| ST41203SC | 10 x 12 mm | 163.0 | 25.0 | 20.8 | 6 |
| ST41204SC | 11 x 13 mm | 175.0 | 27.0 | 23.0 | 6 |
| ST41303SC | 12 x 13 mm | 163.0 | 27.2 | 24.6 | 6 |
| ST41205SC | 12 x 14 mm | 187.0 | 29.0 | 25.0 | 6 |
| ST41218SC | 13 x 15 mm | 182.0 | 33.4 | 27.0 | 6 |
| ST41219SC | 13 x 16 mm | 182.0 | 33.4 | 27.0 | 6 |
| ST41304SC | 14 x 15 mm | 182.0 | 33.4 | 29.0 | 6 |
| ST41206SC | 14 x 17 mm | 201.0 | 35.5 | 29.0 | 6 |
| ST41305SC | 16 x 17 mm | 201.0 | 35.5 | 33.4 | 6 |
| ST41214SC | 16 x 18 mm | 201.0 | 35.5 | 33.4 | 6 |
| ST41207SC | 17 x 19 mm | 228.0 | 39.7 | 35.5 | 6 |
| ST41225ST | 18 x 19 mm | 228.0 | 39.7 | 35.5 | 4 |
| ST41208SC | 19 x 21 mm | 240.0 | 43.8 | 39.7 | 4 |
| ST41215SC | 19 x 22 mm | 254.0 | 46.0 | 43.8 | 4 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|----------------|------------------|-----------------|-----------------|---|
| ST41227ST | 20 x 22 mm | 254.0 | 45.3 | 42.0 | 4 |
| ST41226 | 21 x 22 mm | 254.0 | 46.0 | 43.8 | 4 |
| ST41209SC | 21 x 23 mm | 262.0 | 48.0 | 43.8 | 4 |
| ST41210SC | 22 x 24 mm | 285.0 | 50.0 | 46.0 | 4 |
| ST41211SC | 23 x 26 mm | 300.0 | 54.3 | 48.0 | 4 |
| ST41212SC | 24 x 27 mm | 300.0 | 54.3 | 48.0 | 4 |
| ST41220SC | 27 x 30 mm | 290.0 | 62.5 | 56.4 | 4 |
| ST41213SC | 30 x 32 mm | 310.0 | 66.8 | 62.0 | 4 |
| ST41221SC | 30 x 34 mm | 329.0 | 69.7 | 66.8 | 4 |
| ST41222SC | 32 x 34 mm | 329.0 | 69.7 | 66.8 | 4 |
| ST41223SC | 34 x 36 mm | 341.0 | 75.5 | 70.0 | 4 |
| ST41101SC | 1/4×5/16" | 124.0 | 16.5 | 12.5 | 6 |
| ST41102SC | 3/8 x 7/16" | 150.0 | 23.0 | 20.8 | 6 |
| ST41103SC | 1/2 x 9/16" | 175.0 | 27.0 | 23.0 | 6 |
| ST41104SC | 5/8 x 11/16" | 201.0 | 35.5 | 33.4 | 6 |
| ST41105SC | 11/16 x 3/4" | 228.0 | 39.7 | 35.5 | 6 |
| ST41106SC | 13/16 x 7/8" | 254.0 | 46.0 | 43.8 | 4 |
| ST41107SC | 15/16 x 1" | 279.0 | 52.5 | 50.0 | 4 |
| ST41108SC | 1-1/8 x 1-1/4" | 310.0 | 66.8 | 62.0 | 4 |

7 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST09072SJ | 8 x 10, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 21 x 23, 22 x 24 mm | 12 |

8 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|---|----|
| ST08004SJ | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 17x19, 21x23 mm | 12 |





10 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08012 | 5.5 x 7, 8 x 10, 9 x 11, 10 x 12, 12 x 14, 14 x 17, 17 x 19, 19 x 22, 24 x 27, 30 x 32 mm | 6 |

12 Pc. Metric Double Box End Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08007SJ | 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 17 x 19, 19 x 22, 21 x 23, 22 x 24, 27 x 30, 30 x 32 mm | 4 |






Double Box End Wrench

- Double box end wrench design with 2 sizes per wrench
- 40° offset double box end design provides better access to recessed fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|------------|------------------|--------------|-----------------|---|
| ST42221SC | 5.5 x 7 mm | 163.0 | 24.6 | 27.2 | 6 |
| ST42213SC | 6x7 mm | 187.0 | 25.0 | 29.0 | 6 |
| ST42214SC | 8x9 mm | 182.0 | 27.0 | 33.4 | 6 |
| ST42201SC | 8 x 10 mm | 182.0 | 27.0 | 33.4 | 6 |
| ST42222SC | 9 x 11 mm | 182.0 | 29.0 | 33.4 | 6 |
| ST42215SC | 10 x 11 mm | 201.0 | 29.0 | 35.5 | 6 |
| ST42202SC | 10 x 12 mm | 201.0 | 33.4 | 35.5 | 6 |
| ST42203SC | 11 x 13 mm | 201.0 | 33.4 | 35.5 | 6 |
| ST42216SC | 12 x 13 mm | 228.0 | 35.5 | 39.7 | 6 |
| ST42204SC | 12 x 14 mm | 228.0 | 35.5 | 39.7 | 6 |
| ST42223SC | 13 x 15 mm | 240.0 | 39.7 | 43.8 | 6 |
| ST42224SC | 13 x 16 mm | 254.0 | 43.8 | 46.0 | 6 |
| ST42217SC | 14 x 15 mm | 254.0 | 42.0 | 45.3 | 6 |
| ST42205SC | 14 x 17 mm | 254.0 | 43.8 | 46.0 | 6 |
| ST42218SC | 16 x 17 mm | 262.0 | 43.8 | 48.0 | 6 |
| ST42219SC | 16 x 18 mm | 285.0 | 46.0 | 50.0 | 6 |
| ST42206SC | 17 x 19 mm | 300.0 | 48.0 | 54.3 | 6 |
| ST42207SC | 19 x 21 mm | 300.0 | 48.0 | 54.3 | 4 |
| ST42220SC | 19 x 22 mm | 290.0 | 56.4 | 62.5 | 4 |



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|--------------|------------------|-----------------|--------------|---|
| ST42208SC | 21 x 23 mm | 310.0 | 62.0 | 66.8 | 4 |
| ST42209SC | 22 x 24 mm | 329.0 | 66.8 | 69.7 | 4 |
| ST42210SC | 23 x 26 mm | 329.0 | 66.8 | 69.7 | 4 |
| ST42211SC | 24 x 27 mm | 341.0 | 70.0 | 75.5 | 4 |
| ST42225SC | 27 x 30 mm | 124.0 | 12.5 | 16.5 | 4 |
| ST42212SC | 30 x 32 mm | 150.0 | 20.8 | 23.0 | 4 |
| ST42101SC | 3/8 x 7/16" | 175.0 | 23.0 | 27.0 | 6 |
| ST42102SC | 1/2×9/16" | 201.0 | 33.4 | 35.5 | 6 |
| ST42104SC | 11/16 x 3/4" | 228.0 | 35.5 | 39.7 | 6 |
| ST42105SC | 13/16 x 7/8" | 254.0 | 43.8 | 46.0 | 4 |
| ST42106SC | 7/8 x 15/16" | 279.0 | 50.0 | 52.5 | 4 |
| ST42107SC | 15/16 x 1" | 310.0 | 62.0 | 66.8 | 4 |


11 Pc. Metric Deep Offset Double Box End Wrench Set


| Article Code | Content | |
|--------------|--|---|
| ST08023 | 6x7, 8x9, 10x11, 12x13, 14x15, 16x17, 18x19, 20x22, 21x23, 24x27, 30x32 mm | 6 |



Deep Offset Double Box End Wrench

- Double box end wrench design with 2 sizes per wrench
- 70° offset double box ends for better access to recessed fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- · High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length (mm) | Width (mm) | Hight (mm) | |
|--------------|------------|-------------|------------|------------|----|
| ST42301 | 6 x 7 mm | 10.7 | 11.2 | 170.0 | 16 |
| ST42302 | 8 x 9 mm | 11.8 | 13.3 | 183.0 | 16 |
| ST42303 | 10 x 11 mm | 14.7 | 16.1 | 195.0 | 16 |
| ST42304 | 12 x 13 mm | 17.9 | 19.1 | 213.0 | 16 |
| ST42305 | 14 x 15 mm | 20.6 | 21.5 | 225.0 | 12 |
| ST42306 | 16 x 17 mm | 23.6 | 24.6 | 245.0 | 12 |
| ST42307 | 18 x 19 mm | 26.3 | 27.3 | 265.0 | 12 |
| ST42309 | 20 x 22 mm | 28.8 | 31.8 | 288.0 | 12 |
| ST42310 | 21 x 23 mm | 30.1 | 34.1 | 305.0 | 12 |
| ST42312 | 24 x 27 mm | 34.6 | 38.1 | 325.0 | 6 |
| ST42315 | 30 x 32 mm | 42.7 | 45.7 | 370.0 | 6 |

6 Pc. Metric Flex Head Socket & Open Wrench Set

| Article Code Content | | |
|----------------------|---------------------------|---|
| ST09037SJ | 10, 12, 13, 14, 17, 19 mm | 6 |

3 Pc. Metric Double Flex Head **Socket Wrench Set**


| Article Code Content | | |
|------------------------|-----------------------------|---|
| ST08042 | 8 x 10, 12 x 14, 17 x 19 mm | 6 |






Double Flex Head Socket Wrench

- Double box end wrench design with 2 sizes per wrench
- 12 pt. socket end pivots 180° for better access to hard-to-reach fasteners
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100






| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|------------|------------------|-----------------|--------------|---|
| ST47501ST | 8x9 mm | 183.0 | 12.7 | 14.0 | 6 |
| ST47507ST | 8 x 10 mm | 189.0 | 13.7 | 14.8 | 6 |
| ST47502ST | 10 x 11 mm | 197.0 | 14.7 | 15.8 | 6 |
| ST47503ST | 12 x 13 mm | 211.0 | 16.2 | 17.4 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | 6 |
|--------------|------------|------------------|-----------------|-----------------|---|
| ST47504ST | 14 x 15 mm | 240.0 | 19.8 | 21.9 | 6 |
| ST47505ST | 16 x 17 mm | 256.0 | 23.9 | 24.0 | 6 |
| ST47509ST | 17 x 19 mm | 264.0 | 25.0 | 25.0 | 6 |
| ST47506ST | 18 x 19 mm | 272.0 | 26.9 | 27.0 | 6 |

Box End Slugging Wrench

- Stubby beam length for when clearance is limited
- Off-corner loading design provides better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- Hammer striking surface on end for more force when tightening or loosening fasteners
- Features a safety through hole for connection to equipment via wire, string etc. in confined spaces
- High-visibility stamped markings provide quick size identification
- Heat treated for long lasting durability
- Meets or exceeds ASME B107.410

| Article Code | Size | Length L (mm) | Width A (mm) | |
|--------------|---------|---------------|--------------|---|
| ST48505 | 27.0 mm | 175.0 | 45.0 | 4 |
| ST48506 | 30.0 mm | 185.0 | 50.0 | 4 |
| ST48507 | 32.0 mm | 195.0 | 55.0 | 4 |
| ST48509 | 36.0 mm | 200.0 | 55.0 | 4 |
| SC48512 | 41.0 mm | 222.0 | 62.0 | 4 |
| ST48515 | 46.0 mm | 240.0 | 75.0 | 4 |
| ST48516 | 50.0 mm | 245.0 | 75.0 | 3 |
| ST48517 | 55.0 mm | 265.0 | 85.0 | 2 |
| ST48519 | 60.0 mm | 270.0 | 90.0 | 2 |
| ST48520 | 65.0 mm | 270.0 | 90.0 | 2 |
| ST48521 | 70.0 mm | 320.0 | 105.0 | 2 |
| SC48522 | 75.0 mm | 330.0 | 110.0 | 1 |
| SC48523 | 80.0 mm | 359.0 | 131.0 | 1 |




| Article Code | Size | Length L (mm) | Width A (mm) | |
|--------------|----------|---------------|--------------|---|
| SC48524 | 85.0 mm | 359.0 | 131.0 | 1 |
| SC48525 | 90.0 mm | 391.0 | 145.0 | 1 |
| SC48526 | 95.0 mm | 391.0 | 145.0 | 1 |
| SC48527 | 100.0 mm | 421.0 | 158.0 | 1 |
| SC48528 | 105.0 mm | 421.0 | 158.0 | 1 |
| SC48529 | 110.0 mm | 450.0 | 172.0 | 1 |
| SC48530 | 115.0 mm | 450.0 | 172.0 | 1 |
| SC48531 | 120.0 mm | 480.0 | 185.0 | 1 |

Open End Slugging Wrench

- · Stubby beam length for when clearance is limited
- Sleek head design enables access to tight spots where a ratchet will not fit
- Hammer striking surface on end for more force when tightening or loosening fasteners
- Features a safety through hole for connection to equipment via wire, string, etc. in confined spaces
- High-visibility stamped markings provide quick size identification
- Heat treated for long lasting durability
- Meets or exceeds ASME B107.410

| Article Code | Size | Length L (mm) | Width A (mm) | |
|--------------|---------|---------------|--------------|---|
| SC48603 | 27.0 mm | 175.0 | 55.0 | 6 |
| SC48604 | 30.0 mm | 185.0 | 60.0 | 6 |
| SC48605 | 32.0 mm | 190.0 | 65.0 | 6 |
| SC48607 | 36.0 mm | 210.0 | 70.0 | 6 |
| SC48609 | 41.0 mm | 230.0 | 85.0 | 6 |
| SC48610 | 46.0 mm | 240.0 | 95.0 | 6 |
| SC48611 | 50.0 mm | 270.0 | 100.0 | 6 |
| SC48612 | 55.0 mm | 295.0 | 115.0 | 6 |
| SC48613 | 60.0 mm | 310.0 | 120.0 | 3 |
| SC48614 | 65.0 mm | 330.0 | 145.0 | 3 |
| SC48615 | 70.0 mm | 365.0 | 150.0 | 3 |
| SC48616 | 75.0 mm | 390.0 | 156.0 | 1 |



| Article Code | Size | Length L (mm) | Width A (mm) | |
|--------------|----------|---------------|--------------|---|
| SC48617 | 80.0 mm | 408.0 | 173.0 | 1 |
| SC48618 | 85.0 mm | 408.0 | 173.0 | 1 |
| SC48619 | 90.0 mm | 445.0 | 193.0 | 1 |
| SC48620 | 95.0 mm | 445.0 | 193.0 | 1 |
| SC48621 | 100.0 mm | 485.0 | 214.0 | 1 |
| SC48622 | 105.0 mm | 485.0 | 214.0 | 1 |

7 Pc. Stubby Combination Wrench Set

| Article Code | Content | |
|--------------|-------------------------------|----|
| ST09033SJ | 10, 11, 12, 13, 14, 17, 19 mm | 12 |











Stubby Combination Wrench

- Stubby beam length for when clearance is limited
- · Combination wrenches feature open end & box end
- Off-corner loading design provides better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | 6 |
|--------------|---------|------------------|-----------------|-----------------|---|
| SC49205 | 14.0 mm | 115.0 | 29.0 | 21.5 | 6 |
| SC49208 | 17.0 mm | 127.5 | 35.0 | 26.0 | 6 |
| SC49210 | 19.0 mm | 139.5 | 39.5 | 28.0 | 6 |

T-Handle 6 Point Socket Wrench

- T-Handle provides more leverage to break free stubborn fasteners
- Single hex (6 pt.) fastener end design
- 31 cm extension bar uniquely designed for working in a limited space
- 20 cm handle length ensures higher torque
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.110



| Article Code | Size | Length (mm) | |
|--------------|---------|-------------|---|
| ST47701SC | 8.0 mm | 310.0 | 6 |
| ST47702SC | 9.0 mm | 310.0 | 6 |
| ST47703SC | 10.0 mm | 310.0 | 6 |
| ST47704SC | 11.0 mm | 310.0 | 6 |
| ST47705SC | 12.0 mm | 310.0 | 6 |

| Article Code | Size | Length (mm) | |
|--------------|---------|-------------|---|
| ST47706SC | 13.0 mm | 310.0 | 6 |
| ST47707SC | 14.0 mm | 310.0 | 6 |
| ST47710SC | 17.0 mm | 313.0 | 6 |
| ST47712SC | 19.0 mm | 313.0 | 6 |

3 Pc. Metric Flare Nut Wrench Set

3 Pc. Metric Flare Nut Wrench Set

3 Pc. SAE Flare Nut Wrench Set

| Article Code | Content | |
|--------------|-----------------------------|---|
| ST09031SJ | 9 x 11, 13 x 14, 16 x 17 mm | 6 |

| Article Code | Content | |
|--------------|-----------------------------|----|
| ST09033U | 9 x 10, 11 x 12, 13 x 14 mm | 12 |

| Article Code | Content | |
|--------------|---|---|
| ST09032 | 3/8 x 7/16", 1/2 x 9/16", 5/8 x 11/16" | 6 |








Flare Nut Wrench

- Flare nut wrench design with 2 sizes per wrench
- Flare nut hex shaped heads give more points of contact on the fastener to prevent damage
- Rugged one piece steel alloy construction
- Use for removing or replacing nuts on fuel, brake lines, and air conditioning lines
- Sleek head design enables access to tight spots where a ratchet will not fit
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|------------|------------------|-----------------|-----------------|---|
| ST48200SC | 8 x 10 mm | 140.0 | 17.3 | 21.0 | 6 |
| ST48201SC | 9 x 11 mm | 152.0 | 19.4 | 22.2 | 6 |
| ST48204SC | 10 x 12 mm | 166.0 | 21.0 | 23.4 | 6 |
| ST48202SC | 13 x 14 mm | 178.0 | 24.9 | 26.1 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|--------------|------------------|--------------|--------------|---|
| ST48203SC | 16 x 17 mm | 193.0 | 27.5 | 30.5 | 6 |
| ST48301SC | 3/8 x 7/16" | 152.0 | 19.4 | 22.2 | 6 |
| ST48302SC | 1/2×9/16" | 178.0 | 24.9 | 26.1 | 6 |
| ST48303SC | 5/8 x 11/16" | 193.0 | 27.5 | 30.5 | 6 |


4 Pc. E-Torx® Box Wrench Set

| Article Code | Content | |
|--------------|----------------------------------|---|
| ST09012SJ | E6xE8, E10xE12, E14xE18, E20xE24 | 6 |



Double Box E-Torx® Wrench

- Double box end wrench design with 2 sizes per wrench
- Off-corner loading design on box ends provide better grip and reduces fastener rounding
- Sleek head design enables access to tight spots where a ratchet will not fit
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST45201SC | E6xE8 | 113.0 | 10.0 | 12.2 | 6 |
| ST45202SC | E10xE12 | 141.0 | 13.5 | 15.5 | 6 |
| ST45203SC | E14xE18 | 181.0 | 17.7 | 11.0 | 6 |
| ST45204SC | E20xE24 | 225.0 | 25.0 | 28.6 | 6 |

VDE Insulated Open End Wrench




- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Sleek head design enables access to tight spots where a ratchet will not fit
- Red color for quick identification of VDE
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Size | Length L (mm) | Width B (mm) | Hight A (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST41306SC | 6.0 mm | 90.0 | 23.0 | 7.0 | 6 |
| ST41307SC | 7.0 mm | 90.0 | 25.0 | 7.0 | 6 |
| ST41308SC | 8.0 mm | 100.0 | 27.0 | 7.5 | 6 |
| ST41309SC | 9.0 mm | 100.0 | 29.0 | 7.5 | 6 |
| ST41310SC | 10.0 mm | 110.0 | 31.0 | 8.0 | 6 |
| ST41311SC | 11.0 mm | 110.0 | 34.0 | 8.5 | 6 |
| ST41312SC | 12.0 mm | 130.0 | 36.0 | 8.5 | 6 |
| ST41313SC | 13.0 mm | 135.0 | 39.0 | 10.5 | 6 |
| ST41314SC | 14.0 mm | 145.0 | 40.0 | 10.5 | 6 |
| ST41315SC | 15.0 mm | 150.0 | 42.0 | 11.5 | 6 |
| ST41316SC | 16.0 mm | 160.0 | 43.0 | 11.5 | 6 |
| ST41317SC | 17.0 mm | 160.0 | 47.0 | 12.5 | 6 |
| ST41318SC | 18.0 mm | 175.0 | 50.0 | 13.0 | 6 |
| ST41319SC | 19.0 mm | 175.0 | 53.0 | 14.0 | 6 |
| ST41321SC | 21.0 mm | 195.0 | 55.0 | 14.0 | 6 |
| ST41322SC | 22.0 mm | 195.0 | 58.0 | 14.0 | 6 |
| ST41324SC | 24.0 mm | 225.0 | 62.0 | 16.5 | 6 |

VDE Insulated Single Offset Ring Wrench

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Off-corner loading design provides better grip and reduces fastener rounding
- Offset box end design provides better access to recessed fasteners
- Red color for quick identification of VDE
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability




| Article Code | Size | Length L (mm) | Width B (mm) | Hight A (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST42406SC | 6.0 mm | 150.0 | 16.0 | 5.5 | 6 |
| ST42407SC | 7.0 mm | 150.0 | 18.0 | 5.7 | 6 |
| ST42408SC | 8.0 mm | 155.0 | 19.0 | 6.1 | 6 |
| ST42409SC | 9.0 mm | 155.0 | 20.0 | 7.2 | 6 |
| ST42410SC | 10.0 mm | 170.0 | 21.0 | 7.3 | 6 |
| ST42411SC | 11.0 mm | 170.0 | 22.5 | 7.7 | 6 |
| ST42412SC | 12.0 mm | 190.0 | 23.0 | 7.7 | 6 |
| ST42413SC | 13.0 mm | 194.0 | 26.0 | 8.5 | 6 |
| ST42414SC | 14.0 mm | 205.0 | 28.0 | 9.5 | 6 |
| ST42415SC | 15.0 mm | 208.0 | 28.0 | 10.1 | 6 |
| ST42416SC | 16.0 mm | 220.0 | 30.0 | 10.5 | 6 |
| ST42417SC | 17.0 mm | 225.0 | 32.0 | 10.7 | 6 |
| ST42418SC | 18.0 mm | 230.0 | 33.0 | 11.5 | 6 |
| ST42419SC | 19.0 mm | 230.0 | 36.0 | 12.0 | 6 |
| ST42421SC | 21.0 mm | 235.0 | 37.0 | 12.0 | 6 |
| ST42422SC | 22.0 mm | 245.0 | 44.0 | 12.2 | 6 |
| ST42424SC | 24.0 mm | 265.0 | 44.0 | 13.0 | 6 |



VDE Insulated Adjustable Wrench

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Cushion handle for ease of use and slip protection
- Tempered steel construction offers strength and durability for long-lasting performance



| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | |
|--------------|------|---------------|---------------------|-----------------------|---|
| ST47101SC | 6" | 163.0 | 24.0 | 11.6 | 6 |
| ST47102SC | 8" | 215.0 | 28.2 | 11.7 | 6 |
| ST47103SC | 10" | 260.0 | 36.6 | 16.4 | 6 |
| ST47104SC | 12" | 312.0 | 38.0 | 20.4 | 6 |

11 Pc. X6 Pass-Thru Adjustable Wrench Set - Black Edition

| Article Code | Content | |
|--------------|--|---|
| ST09000 | 1 - 8" Adjustable Wrenche 3-in-1 10 - Sockets Vortex 10 mm (3/8"), 11 mm (7/16"), 12 mm (15/32"), 13 mm (1/2"), 14 mm (9/16"), 15 mm (19/32"), 16 mm (5/8"), 17 mm (11/16"), 18 mm (23/32"), 19 mm (3/4") | 6 |







ST09000


11 PC. X6 PASS-THRU ADJUSTABLE WRENCH SET -**BLACK EDITION**



Universal socket style



Pass-Through system



Standard and deep socket combined



Flush mounted reversing lever



8" adjustable wrench



Reversible lower jaw











1


1

Adjustable Wrench

- Wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- High-visibility stamped markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100


ST47207SC

ST47208SC



52.4

61.9

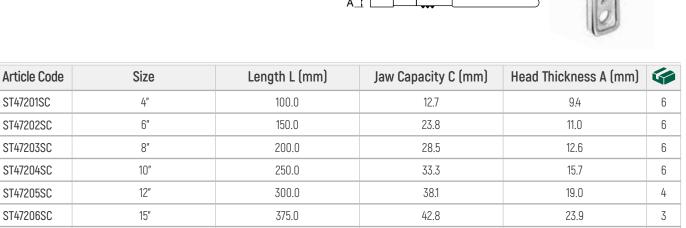

450.0

600.0

2 Pc. Wide Jaw 6" and 10" Adjustable Wrench Set

| Article Code | Content | |
|--------------|------------------------------------|----|
| ST47130 | Wide Jaw Adjustable Wrench 6", 10" | 12 |

18"

24"



28.5

34.5

Wide Jaw Adjustable Wrench


- Extra wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures in both SAE standard and metric sizes for quick fastener identification
- High-visibility stamped markings provide quick size identification
- Black oxide finish to resist corrosion
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | |
|--------------|------|---------------|---------------------|-----------------------|---|
| ST47122 | 6" | 150.0 | 28.6 | 11.0 | 6 |
| ST47123 | 8" | 200.0 | 35.9 | 13.2 | 6 |
| ST47124 | 10" | 250.0 | 39.0 | 15.5 | 6 |
| ST47125 | 12" | 300.0 | 43.0 | 19.0 | 4 |

Dipping Handle Adjustable Wrench

- · Wide jaw opening for greater capacity
- Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Professional, ergonomic, oil resistant dipped grips wipe clean easily
- High-visibility size markings provide quick size identification
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100




| Article Code | Size | Length L (mm) | Jaw Capacity C (mm) | Head Thickness A (mm) | |
|--------------|------|---------------|---------------------|-----------------------|---|
| ST47221SC | 4" | 100.0 | 12.7 | 8.6 | 6 |
| ST47222SC | 6" | 150.0 | 23.8 | 9.5 | 6 |
| ST47223SC | 8" | 200.0 | 28.5 | 12.0 | 6 |
| ST47224SC | 10" | 250.0 | 33.3 | 14.0 | 6 |
| ST47225SC | 12" | 300.0 | 38.1 | 16.5 | 4 |
| ST47226SC | 15" | 375.0 | 42.8 | 21.0 | 3 |

Heavy Duty Pipe Wrench

- Forged jaw, featuring easing spinning adjusting nut
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Size | Length (mm) | Jaw Capacity (mm) | Head Thickness (mm) | |
|--------------|------|-------------|-------------------|---------------------|---|
| ST70812ST | 8" | 200.0 | 25.0 | 20.0 | 6 |
| ST70813ST | 10" | 250.0 | 30.0 | 30.0 | 6 |
| ST70814ST | 12" | 300.0 | 40.0 | 30.0 | 6 |
| ST70815ST | 14" | 350.0 | 50.0 | 35.0 | 6 |
| ST70816ST | 18" | 450.0 | 60.0 | 38.0 | 3 |
| ST70817ST | 24" | 600.0 | 75.0 | 40.0 | 2 |
| ST70818ST | 36" | 900.0 | 85.0 | 55.0 | 1 |
| ST70819ST | 48" | 1200.0 | 110.0 | 70.0 | 1 |

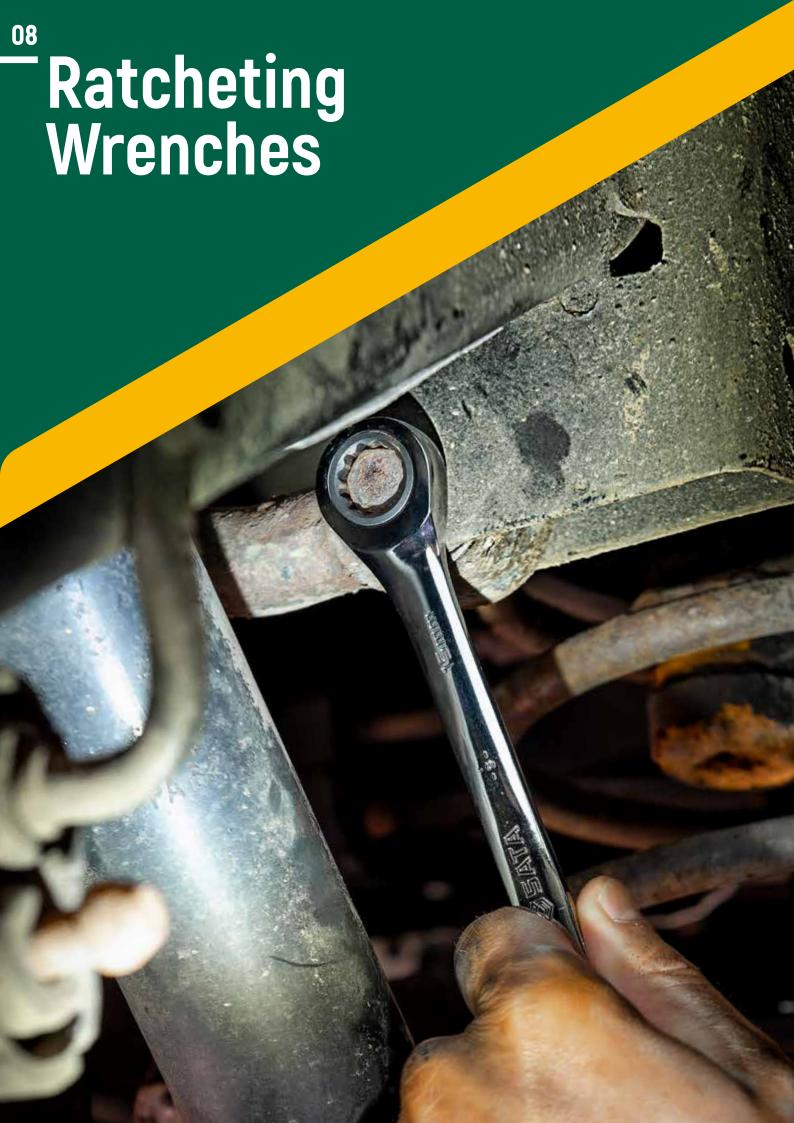

3 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---------------|----|
| ST09075 | 10, 13, 17 mm | 10 |

5 Pc. Metric Combination Ratcheting Wrench Set

| Article Code | Content | |
|--------------|-----------------------|----|
| ST09078SJ | 10, 11, 12, 13, 14 mm | 12 |





comes in a tool roll

7 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|------------------------------|---|
| ST09024SJ | 8, 10, 12, 13, 14, 15, 18 mm | 6 |

8 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|----------------------------------|---|
| ST08007ASJ | 8, 10, 12, 13, 14, 15, 17, 19 mm | 3 |





ST09066-02


12 PC. METRIC DOUBLE STATCHETING WRENCH SET



Ratcheting function on open end and box end



Needs as little as 5° to remove fasteners




Head design enables access to tight spots



Open end quickly ratchet



Off-Corner loading design



5° ratcheting arc versus 30°

METRIC







8 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|----------------------------------|---|
| ST09079SJ | 8, 10, 11, 12, 13, 14, 17, 19 mm | 5 |

12 Pc. Metric Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09066-02 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 2 |





7 Pc. SAE Double Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---------------------------------------|---|
| ST08020 | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 6 |



Double Ratcheting Wrench

- · Ratcheting function on open end and box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Open end quickly ratchet nuts and bolts without removing the wrench from the fastener
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- 5° ratcheting arc versus 30° on standard combination wrenches
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST43601 | 5.5 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43602 | 6.0 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43603 | 7.0 mm | 133.0 | 17.0 | 17.8 | 6 |
| ST43604 | 8.0 mm | 140.0 | 20.0 | 19.0 | 5 |
| ST43605 | 9.0 mm | 150.0 | 20.3 | 19.7 | 5 |
| ST43606 | 10.0 mm | 159.0 | 22.5 | 21.4 | 5 |
| ST43607 | 11.0 mm | 165.5 | 25.0 | 23.0 | 5 |
| ST43608 | 12.0 mm | 172.0 | 27.4 | 24.5 | 5 |
| ST43609 | 13.0 mm | 178.0 | 30.0 | 26.5 | 3 |
| ST43610 | 14.0 mm | 191.0 | 32.0 | 28.6 | 3 |
| ST43611 | 15.0 mm | 200.0 | 34.5 | 30.0 | 3 |
| ST43612 | 16.0 mm | 209.0 | 35.0 | 32.0 | 3 |
| ST43613 | 17.0 mm | 226.0 | 38.5 | 33.5 | 3 |
| ST43614 | 18.0 mm | 237.0 | 40.5 | 34.6 | 3 |
| ST43615 | 19.0 mm | 248.0 | 43.0 | 37.0 | 3 |
| ST43616 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43617 | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43618 | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43619 | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43501 | 5/16" | 140.0 | 20.0 | 19.0 | 5 |
| ST43502 | 3/8" | 159.0 | 22.5 | 21.4 | 5 |
| ST43503 | 7/16" | 165.5 | 25.0 | 23.0 | 5 |
| ST43504 | 1/2" | 178.0 | 30.0 | 26.5 | 3 |
| ST43505 | 9/16" | 191.0 | 32.0 | 28.6 | 3 |
| ST43506 | 5/8″ | 209.0 | 35.0 | 32.0 | 3 |
| ST43508 | 3/4" | 248.0 | 43.0 | 37.0 | 3 |
| ST43511 | 15/16" | 334.0 | 52.2 | 49.0 | 4 |
| ST43512 | 1" | 334.0 | 52.2 | 49.0 | 4 |


7 PC. METRIC X6 OPEN END ST47530 RATCHETING COMBINATION WRENCH SET - BLACK EDITION



Universal spline drive



Open end quickly ratchet



Head design enables access to tight spots



Off-Corner loading design



High-Visibility stamped markings



Black oxide finish

METRIC







7 Pc. Metric X6 Open End Ratcheting Combination Wrench Set - Black Edition Ratcheting Wrench Set

| Article Code | Content | |
|--------------|------------------------------|---|
| ST47530 | 8, 10, 12, 13, 14, 15, 17 mm | 3 |

7 Pc. Metric Stubby Combination

| Article Code | Content | |
|--------------|-------------------------------|---|
| ST09034 | 10, 12, 13, 14, 15, 17, 19 mm | 3 |





7 Pc. Metric Combination Ratcheting **Wrench Set**

| Article Code | Content | |
|--------------|------------------------------|---|
| ST09050SJ | 8, 10, 12, 14, 17, 19, 22 mm | 4 |

8 Pc. Metric Combination Ratcheting **Wrench Set**

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09038SJ | 10, 11, 12, 13, 14, 15, 17, 19 mm | 6 |





8 Pc. Metric Combination Ratcheting Wrench Set


| Article Code | Content | 6 |
|--------------|----------------------------------|---|
| ST08008SJ | 8, 10, 12, 13, 14, 15, 17, 19 mm | 8 |

12 Pc. Metric Combination Ratcheting Wrench Set


| Article Code | Content | |
|--------------|---|---|
| ST09040-02 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |





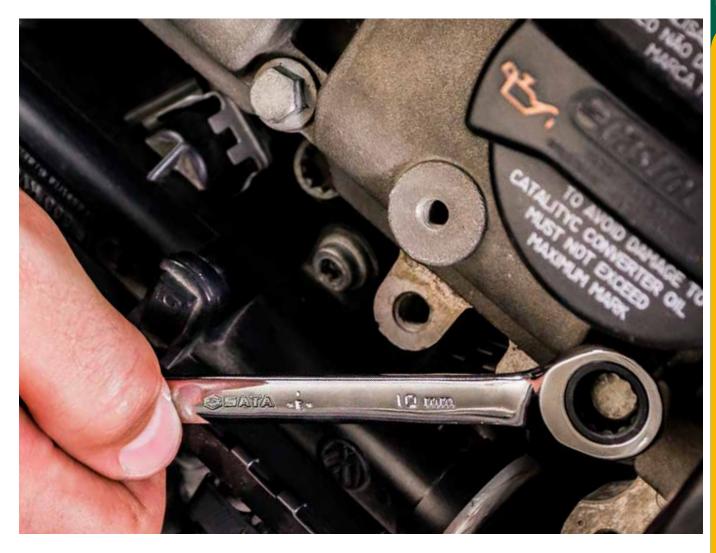

12 PC. METRIC COMBINATION RATCHETING WRENCH SET - BLACK EDITION



Open end & ratcheting box end



Needs as little as 5° to remove fasteners



Thin head and beam



Off-Corner loading design



High-visibility stamped markings



Black oxide finsih

METRIC







12 Pc. Metric Combination Ratcheting 7 Pc. Metric 120XP Combination Wrench Set - Black Edition

| Article Code | Content | |
|--------------|---|---|
| ST08032 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |

Ratcheting Wrench Set

| Article Code | Content | |
|--------------|------------------------------|----|
| ST08043U | 8, 10, 12, 13, 14, 15, 18 mm | 10 |





7 Pc. SAE 120XP Combination **Ratcheting Wrench Set**

| Article Code | Content | |
|--------------|---------------------------------------|----|
| ST08044U | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 10 |

7 Pc. SAE Combination Ratcheting **Wrench Set**

| Article Code | Content | |
|--------------|---------------------------------------|---|
| ST09023SJ | 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 3/4" | 6 |





Combination Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box end provides better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST43220ST | 5.5 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43221ST | 6.0 mm | 126.0 | 15.0 | 17.8 | 6 |
| ST43222ST | 7.0 mm | 133.0 | 17.0 | 17.8 | 6 |
| ST43201ST | 8.0 mm | 140.0 | 20.0 | 19.0 | 6 |
| ST43202ST | 9.0 mm | 150.0 | 20.3 | 19.7 | 6 |
| ST43203ST | 10.0 mm | 159.0 | 22.5 | 21.4 | 6 |
| ST43204ST | 11.0 mm | 165.5 | 25.0 | 23.0 | 6 |
| ST43205ST | 12.0 mm | 172.0 | 27.4 | 24.5 | 6 |
| ST43206ST | 13.0 mm | 178.0 | 30.0 | 26.5 | 6 |
| ST43207ST | 14.0 mm | 191.0 | 32.0 | 28.6 | 6 |
| ST43208ST | 15.0 mm | 200.0 | 34.5 | 30.0 | 6 |
| ST43209ST | 16.0 mm | 209.0 | 35.0 | 32.0 | 6 |
| ST43210ST | 17.0 mm | 226.0 | 38.5 | 33.5 | 6 |
| ST43211ST | 18.0 mm | 237.0 | 40.5 | 34.6 | 6 |
| ST43212ST | 19.0 mm | 248.0 | 43.0 | 37.0 | 6 |
| ST43213ST | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43214ST | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST43215ST | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43216ST | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST43217ST | 27.0 mm | 359.0 | 56.4 | 52.5 | 4 |
| ST43218ST | 30.0 mm | 402.0 | 62.0 | 58.5 | 2 |
| ST43219ST | 32.0 mm | 426.0 | 65.6 | 62.0 | 2 |
| ST43101ST | 5/16" | 140.0 | 20.0 | 19.0 | 6 |
| ST43102ST | 3/8" | 159.0 | 22.5 | 21.4 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST43103ST | 7/16" | 165.5 | 25.0 | 23.0 | 6 |
| ST43104ST | 1/2" | 178.0 | 30.0 | 26.5 | 6 |
| ST43105ST | 9/16" | 191.0 | 32.0 | 28.6 | 6 |
| ST43106ST | 5/8" | 209.0 | 35.0 | 32.0 | 6 |
| ST43107ST | 11/16" | 226.0 | 38.5 | 33.5 | 6 |
| ST43108ST | 3/4" | 248.0 | 43.0 | 37.0 | 6 |
| ST43109ST | 13/16" | 292.0 | 46.0 | 42.0 | 4 |
| ST43110ST | 7/8" | 292.0 | 46.0 | 42.0 | 4 |
| ST43111ST | 15/16" | 334.0 | 52.2 | 49.0 | 4 |
| ST43112ST | 1" | 334.0 | 52.2 | 49.0 | 4 |
| ST43113ST | 1-1/16" | 359.0 | 56.4 | 52.5 | 4 |
| ST43114ST | 1-1/8" | 402.0 | 62.0 | 58.5 | 2 |
| ST43115ST | 1-1/4" | 426.0 | 65.6 | 62.0 | 2 |

4 Pc. Metric Double Box Ratcheting Wrench Set

| Article Code | Content | |
|--------------|--------------------------------------|---|
| ST46135U | 8 x 10, 12 x 13, 16 x 18, 17 x 19 mm | 6 |

6 Pc. Metric Double Box Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09025SJ | 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 18, 17 x 19 mm | 6 |






Double Box Ratcheting Wrench

- Double box end wrench design with 2 sizes per wrench
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|------------|---------------|--------------|--------------|---|
| ST46201ST | 8 x 9 mm | 131.0 | 18.0 | 19.5 | 6 |
| ST46200ST | 8 x 10 mm | 131.0 | 18.5 | 21.8 | 6 |
| ST46202ST | 10 x 11 mm | 151.0 | 21.8 | 23.5 | 6 |
| ST46203ST | 12 x 13 mm | 171.0 | 25.0 | 26.5 | 6 |
| ST46204ST | 14 x 15 mm | 191.0 | 28.5 | 30.5 | 6 |
| ST46205ST | 16 x 18 mm | 211.0 | 32.5 | 35.5 | 6 |
| ST46206ST | 17 x 19 mm | 231.0 | 34.5 | 36.6 | 6 |

8 Pc. Metric XL X-Beam Ratcheting Wrench Set

10 Pc. Metric XL X-Beam Ratcheting Wrench Set


| Article Code | Content | |
|--------------|--|---|
| ST08016 | 8, 10, 12, 13, 14, 15, 16, 17, 18, 19 mm | 4 |





XL X-Beam™ Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- X-Beam[™] design lets you apply force to the flat side of the wrench, reducing hand fatigue and increasing tourque output by 25%
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46301 | 8.0 mm | 151.0 | 20.0 | 18.5 | 6 |
| ST46302 | 9.0 mm | 165.0 | 20.3 | 19.6 | 6 |
| ST46303ST | 10.0 mm | 181.0 | 22.7 | 22.0 | 6 |
| ST46304ST | 11.0 mm | 196.0 | 25.0 | 24.0 | 6 |
| ST46305ST | 12.0 mm | 207.8 | 27.0 | 25.3 | 6 |
| ST46306ST | 13.0 mm | 220.8 | 29.0 | 27.4 | 6 |
| ST46307ST | 14.0 mm | 235.8 | 32.0 | 29.0 | 6 |
| ST46308ST | 15.0 mm | 250.0 | 34.0 | 31.3 | 6 |
| ST46309 | 16.0 mm | 261.0 | 35.0 | 33.3 | 6 |
| ST46310ST | 17.0 mm | 276.0 | 38.5 | 35.0 | 6 |
| ST46311 | 18.0 mm | 290.0 | 40.5 | 36.0 | 6 |
| ST46312ST | 19.0 mm | 306.0 | 42.0 | 37.0 | 6 |
| ST46322 | 3/8" | 181.0 | 22.7 | 22.0 | 6 |
| ST46323 | 7/16" | 196.0 | 25.0 | 24.0 | 6 |
| ST46324 | 1/2" | 220.0 | 29.0 | 27.4 | 6 |
| ST46325 | 9/16" | 235.0 | 32.0 | 29.0 | 6 |
| ST46326 | 5/8" | 261.0 | 35.0 | 33.3 | 6 |
| ST46327 | 11/16" | 276.0 | 38.5 | 35.0 | 6 |
| ST46328 | 3/4" | 306.0 | 42.0 | 37.0 | 6 |

5 Pc. Metric Reversible Ratcheting Wrench Set

Article Code Content ST09083SJ 10, 11, 12, 13, 14 mm 12

6 Pc. Metric Reversible Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---------------------------|----|
| ST09080SJ | 10, 12, 13, 14, 17, 19 mm | 12 |





12 Pc. Metric Reversible Ratcheting Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST08044 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |

12 Pc. Metric Reversible Ratcheting Wrench Set - Black Edition


| Article Code | Content | |
|--------------|---|---|
| ST08044B | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |





ST08044B

12 PC. METRIC REVERSIBLE RATCHETING WRENCH SET - BLACK EDITION



Open end & ratcheting box end



Needs as little as 5° to remove fasteners



Head design enables access to tight spots



Off-Corner loading design



Flush mounted reversing lever



Black oxide finsih

METRIC







Reversible Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- Flush mounted reversing lever allows user to change direction without removing the wrench
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46601ST | 8.0 mm | 140.0 | 20.0 | 18.0 | 6 |
| ST46602ST | 9.0 mm | 150.0 | 20.0 | 19.6 | 6 |
| ST46603ST | 10.0 mm | 159.0 | 22.5 | 21.6 | 6 |
| ST46604ST | 11.0 mm | 165.0 | 25.0 | 23.5 | 6 |
| ST46605ST | 12.0 mm | 172.0 | 27.0 | 25.0 | 6 |
| ST46606ST | 13.0 mm | 178.0 | 30.0 | 27.0 | 6 |
| ST46607ST | 14.0 mm | 191.0 | 32.0 | 28.5 | 6 |
| ST46608ST | 15.0 mm | 200.0 | 34.5 | 31.0 | 6 |
| ST46609ST | 16.0 mm | 208.0 | 35.0 | 33.0 | 6 |
| ST46610ST | 17.0 mm | 226.0 | 38.5 | 34.5 | 6 |
| ST46611ST | 18.0 mm | 236.0 | 41.0 | 36.0 | 6 |
| ST46612ST | 19.0 mm | 248.0 | 42.0 | 37.0 | 6 |
| ST46617 | 20.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46613 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46614 | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46615 | 24.0 mm | 334.0 | 52.0 | 49.0 | 4 |
| ST46616 | 25.0 mm | 334.0 | 52.0 | 49.0 | 4 |
| ST46671BU | 5/16" | 140.0 | 20.0 | 18.0 | 6 |
| ST46672BU | 11/32" | 150.0 | 20.0 | 19.6 | 6 |
| ST46673BU | 3/8" | 159.0 | 22.5 | 21.6 | 6 |
| ST46674BU | 7/16" | 165.0 | 25.0 | 23.5 | 6 |
| ST46675BU | 1/2" | 178.0 | 30.0 | 27.0 | 6 |
| ST46676BU | 9/16" | 191.0 | 32.0 | 28.5 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|--------|---------------|--------------|--------------|---|
| ST46677BU | 5/8" | 208.0 | 35.0 | 33.0 | 6 |
| ST46678BU | 11/16" | 226.0 | 38.5 | 34.5 | 6 |
| ST46679BU | 3/4" | 248.0 | 42.0 | 37.0 | 4 |
| ST46680BU | 13/16" | 292.0 | 46.0 | 42.0 | 4 |
| ST46681BU | 7/8" | 292.0 | 46.0 | 42.0 | 4 |
| ST46682BU | 15/16" | 334.0 | 52.0 | 49.0 | 4 |
| ST46683BU | 1" | 334.0 | 52.0 | 49.0 | 4 |

5 Pc. Metric Flex Head Ratcheting Wrench Set

| Article Code | Content | |
|--------------|-----------------------|----|
| ST09082SJ | 10, 11, 12, 13, 14 mm | 12 |


12 Pc. Metric Flex Head Ratcheting Wrench Set - Black Edition

| Article Code | Content | |
|--------------|---|---|
| ST08033 | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm | 8 |





12 PC. METRIC FLEX HEAD STOROGOTORY RATCHETING WRENCH SET - BLACK EDITION



Open end & ratcheting box end



Needs as little as 5° to remove fasteners



Head design enables access to tight spots



Flex head ratcheting box end



Off-Corner loading design



Black oxide finsih

METRIC








Flex Head Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Flex head ratcheting box end provides access for hard to reach angled fasteners
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100





| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46421 | 8.0 mm | 144.0 | 20.0 | 18.5 | 6 |
| ST46422 | 9.0 mm | 152.0 | 20.0 | 20.0 | 6 |
| ST46401ST | 10.0 mm | 161.0 | 22.5 | 22.0 | 6 |
| ST46402ST | 11.0 mm | 168.0 | 25.0 | 24.0 | 6 |
| ST46403ST | 12.0 mm | 174.0 | 27.0 | 25.0 | 6 |
| ST46404ST | 13.0 mm | 181.0 | 30.0 | 27.4 | 6 |
| ST46405ST | 14.0 mm | 193.0 | 32.0 | 28.8 | 6 |
| ST46406ST | 15.0 mm | 202.0 | 34.5 | 30.8 | 6 |
| ST46407ST | 16.0 mm | 210.0 | 35.0 | 33.0 | 6 |
| ST46408ST | 17.0 mm | 227.0 | 38.5 | 35.0 | 6 |
| ST46409ST | 18.0 mm | 238.0 | 41.0 | 36.0 | 6 |
| ST46410ST | 19.0 mm | 249.0 | 42.0 | 36.9 | 6 |
| ST46412 | 21.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46413ST | 22.0 mm | 292.0 | 46.0 | 42.0 | 4 |
| ST46414 | 24.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST46415 | 25.0 mm | 334.0 | 52.5 | 49.0 | 4 |
| ST46471BU | 5/16" | 144.0 | 20.0 | 18.5 | 6 |
| ST46473BU | 7/16" | 168.0 | 25.0 | 24.0 | 6 |
| ST46476BU | 5/8″ | 210.0 | 35.0 | 33.0 | 6 |
| ST46477BU | 11/16" | 227.0 | 38.5 | 35.0 | 6 |
| ST46478BU | 3/4" | 249.0 | 42.0 | 36.9 | 6 |
| ST46479BU | 13/16" | 292.0 | 46.0 | 42.0 | 4 |
| ST46480BU | 7/8" | 292.0 | 46.0 | 42.0 | 4 |
| ST46481BU | 15/16" | 334.0 | 52.5 | 49.0 | 4 |
| ST46482BU | 1" | 334.0 | 52.5 | 49.0 | 4 |

7 Pc. Metric XL Locking Flex Head Ratcheting Wrench Set

| Article Code | Content | 6 |
|--------------|-------------------------------|---|
| ST09043SJ | 10, 12, 13, 14, 15, 17, 19 mm | 3 |



XL Locking Flex Head Ratcheting Wrench

- Ratcheting Wrenches feature open end & ratcheting box end
- Ratcheting box end needs as little as 5° to remove fasteners
- Sleek head design enables access to tight spots where a ratchet will not fit
- Flex head ratcheting box end provides access for hard to reach angled fasteners
- Off-corner loading design on ratcheting box ends provide better grip and reduces fastener rounding
- One finger operated lever with options of "locking" or "not locking" positions
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100






| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46801ST | 8.0 mm | 146.0 | 16.9 | 17.9 | 6 |
| ST46802ST | 9.0 mm | 159.0 | 18.8 | 19.6 | 6 |
| ST46803ST | 10.0 mm | 171.0 | 20.9 | 21.3 | 6 |
| ST46804ST | 11.0 mm | 183.0 | 23.1 | 23.0 | 6 |
| ST46805ST | 12.0 mm | 195.0 | 25.0 | 24.1 | 6 |
| ST46806ST | 13.0 mm | 207.0 | 27.1 | 26.2 | 6 |
| ST46807ST | 14.0 mm | 219.0 | 29.3 | 26.7 | 6 |
| ST46808ST | 15.0 mm | 231.0 | 31.2 | 29.9 | 6 |
| ST46809ST | 16.0 mm | 242.0 | 33.2 | 31.7 | 6 |
| ST46810ST | 17.0 mm | 254.0 | 35.5 | 32.2 | 6 |
| ST46811ST | 18.0 mm | 267.0 | 37.5 | 33.3 | 6 |

| Article Code | Size | Length L (mm) | Width A (mm) | Width B (mm) | |
|--------------|---------|---------------|--------------|--------------|---|
| ST46812ST | 19.0 mm | 280.0 | 39.8 | 36.0 | 6 |
| ST46813ST | 20.0 mm | 297.0 | 45.9 | 42.0 | 6 |
| ST46814ST | 21.0 mm | 316.0 | 45.9 | 42.0 | 6 |
| ST46815ST | 22.0 mm | 335.0 | 48.4 | 42.0 | 6 |
| ST46816ST | 24.0 mm | 356.0 | 51.9 | 49.0 | 6 |
| ST46817ST | 25.0 mm | 378.0 | 53.9 | 49.0 | 6 |
| ST46902 | 11/32" | 159.0 | 18.8 | 19.6 | 6 |
| ST46904 | 7/16" | 183.0 | 23.1 | 23.0 | 6 |
| ST46905 | 1/2" | 207.0 | 27.1 | 26.2 | 6 |
| ST46906 | 9/16" | 219.0 | 29.3 | 26.7 | 6 |
| ST46909 | 3/4" | 280.0 | 39.8 | 36.0 | 6 |
| ST46911 | 7/8" | 335.0 | 48.4 | 42.0 | 6 |
| ST46912 | 15/16" | 345.0 | 52.4 | 42.0 | 6 |

Construction Ratcheting Wrench

- Construction Ratcheting Wrench design with 2 sizes per wrench
- Designed with ratcheting function for increased speed and efficiency while fastening
- Tip end can be used to twist wire
- Composite function of socket and ratchet
- High-visibility stamped markings provide quick size identification
- Black oxide finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.100



| Article Code | Size | Length L (mm) | Width A (mm) | |
|--------------|------------|---------------|--------------|---|
| SC47305 | 12 x 14 mm | 225.0 | 31.0 | 2 |
| SC47308 | 14 x 17 mm | 270.0 | 35.0 | 2 |
| SC47309 | 17 x 19 mm | 305.0 | 42.0 | 2 |
| SC47310 | 17 x 21 mm | 310.0 | 40.0 | 2 |
| SC47312 | 19 x 21 mm | 310.0 | 40.0 | 2 |
| SC47313 | 19 x 22 mm | 310.0 | 40.0 | 2 |
| SC47314 | 19 x 24 mm | 310.0 | 45.0 | 2 |
| SC47317 | 21 x 26 mm | 370.0 | 54.0 | 2 |
| SC47319 | 22 x 24 mm | 370.0 | 55.0 | 2 |
| SC47321 | 24 x 27 mm | 400.0 | 65.0 | 2 |
| SC47322 | 24 x 30 mm | 400.0 | 60.0 | 2 |
| SC47324 | 30 x 32 mm | 400.0 | 60.0 | 2 |
| SC47325 | 32 x 36 mm | 400.0 | 65.0 | 2 |

Ratcheting Adjustable Wrench 8"

- Adjustable wrench for versatility
- Ratcheting function increases speed when tightening and loosening fasteners
- · Wide handle for improved comfort and better leverage
- Hex jaw design reduces slippage and tightly grips bolt
- Larger knurl provides a tighter fit, is easier to adjust and is less likely to bind up
- Built-in scale measures metric sizes for quick fastener identification
- Meets or exceeds ASME B107.100



Excluded from Lifetime Warranty terms



3 Pc. Metric Drive Adapter Set

| Article Code | Content | |
|--------------|---|----|
| ST09084SJ | 1/4" Dr.x10 mm, 3/8" Dr.x13 mm, 1/2" Dr.x19 mm | 10 |







1/4" Metric Ratcheting Wrench Socket Adapter Quick Release Function

- Converts a 10 mm box end ratcheting wrench into a 1/4" drive tool
- Pin hole can be used with detent pin for secure socket retention to the adapter
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Overall Length (mm) | |
|--------------|---------------------|----|
| ST46654ST | 20.3 | 10 |

3/8" Metric Ratcheting Wrench Socket Adapter with Quick Release Function

- Converts a 13 mm box end ratcheting wrench into a 3/8" drive tool
- Pin hole can be used with detent pin for secure socket retention to the adapter
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability




| Article Code | Overall Length (mm) | |
|--------------|---------------------|----|
| ST46655ST | 24.3 | 10 |

1/2" Metric Ratcheting Wrench Socket Adapter with Quick Release Function

- Converts a 19 mm box end ratcheting wrench into a 1/2" drive tool
- Pin hole can be used with detent pin for secure socket retention to the adapter
- · Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Overall Length (mm) | |
|--------------|---------------------|----|
| ST46656ST | 29.3 | 10 |

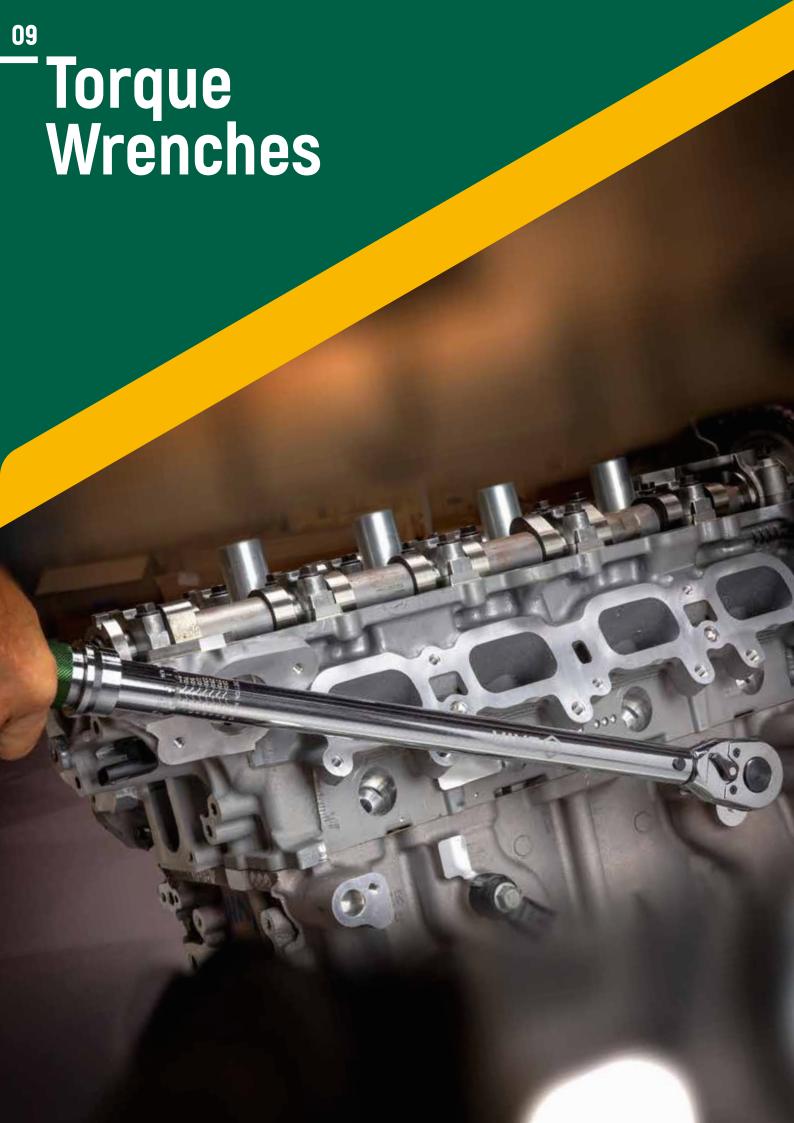

2

1

1

A-Series Mechanical Torque Wrench

- Teardrop, low-profile head and flush-mounted on/off switch allow better access in tight spaces
- High accuracy with deviation of +/- 3% max.
- Knurled grip for comfort and control
- Flush mounted reversing lever allows user to change direction with one hand without removing the wrench
- Audible click and/or impulse when torque setting is reached
- Detent style locking collar prevents accidental change of torque setting
- Matt finish

Article Code

ST96211SC

ST96212SC

ST96311SC

ST96312SC

ST96313SC

ST96411SC

ST96412SC

 Tempered steel construction offers strength and durability for long-lasting performance

Size

1/4"

3.8"

1/2"


1/2"

1/2"

3/4"

3/4"

- High strength protective case
- Meets or exceeds ASME B107.300

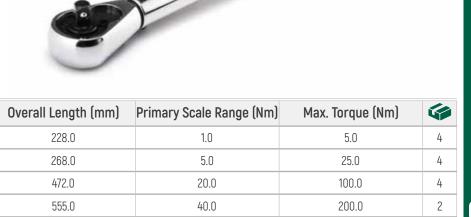





616.0

864.0

1107.0



68.0

110.0

160.0



340.0

550.0

0.008




Torque wrench is a precision instrument. Warranty conditions:

- SATA torque products are warrantee to (1) be free of defects in material and work-manship.
- (2) Accuracy standards for calibration are warrantee for 90 days from date of purchase. Products for which warranty repair is requested should be returned, at buyer's cost, to your nearest repair center.

SATA torque products are precision instruments that contain moving parts. These components are subject to normal wear through use, and replacement there of is the responsibility of the buyer. Torque products should be routinely checked for calibration at an authorized repair center using SATA repair parts

This warranty shall not apply to products which have been misused, abused, damaged by accident or otherwise, repaired by anyone other than an authorized repair center or modified by anyone other than SATA tools.

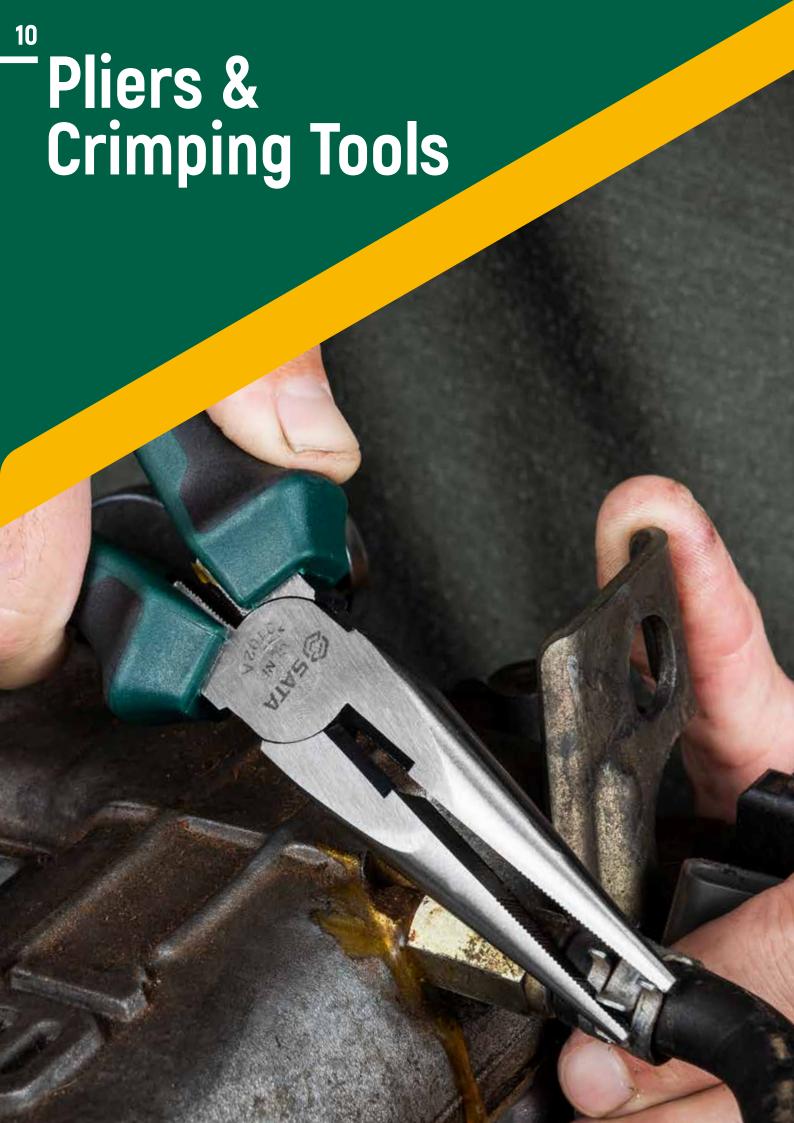

3 Pc. VDE Insulated Pliers Set



3 Pc. Pliers Set

| Article Code | Content | |
|--------------|---|---|
| ST09261SJ | 1-8" VDE Insulated Linesman Pliers 1-6" VDE Insulated Diagonal Pliers 1-6" VDE Insulated Long Nose Pliers | 6 |

| Article Code Content | | | | | |
|----------------------|--|---|--|--|--|
| ST70002U | 1-8" Universal Pliers 1-8" Long Nose Pliers 1-7" Diagonal Pliers | 6 | | | |





5 Pc. Pliers Set

| Article Code | Content | |
|--------------|---|---|
| ST70001U | 2 - Tongue-and-Groove Pliers, 10", 12" 1 - Long Nose Pliers 8" 1 - Diagonal Pliers 7" 1 - Slip-Joint Pliers 6" | 5 |









Long Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Serrated jaws for precision gripping in restricted areas
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70101AST | 6" | 165.0 | 10.0 | 20.0 | 57.0 | Copper Wire Ø 2.2, Iron Wire Ø 2.0, Hard Wire Ø 1.6 | 6 |
| ST70102AST | 8" | 207.0 | 12.0 | 22.8 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 24, Hard Wire Ø 2.0 | 6 |

High Leverage Long-Nose Pliers

- High leverage joint design provides greater cutting power while reducing effort to make cuts
- TPE two-tone anti-slip handle provides superior comfort and grip
- Serrated jaws for precision gripping in restricted areas
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|----------------|--------------------|---|---|
| ST72401 | 6″ | 164.4 | 10.0 | 20.0 | 57.6 | Copper Wire Ø 2.2, Iron Wire Ø 2.0, Hard Wire Ø 1.6 | 6 |

VDE Insulated Long Nose Pliers

- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Serrated jaws for precision gripping in restricted areas
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Anti-slip handle provides superior comfort and grip
- · Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.13M





| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | (4) |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|------------------------|------------|
| ST70131ST | 6" | 170.0 | 9.0 | 15.5 | 56.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70132ST | 8" | 212.0 | 9.0 | 16.5 | 58.6 | Medium Hard Wire Ø 1.6 | 6 |

Diagonal Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70201AST | 5″ | 131.0 | 9.8 | 17.0 | 54.0 | Copper Wire \emptyset 2.2, Iron Wire \emptyset 2.0, Hard Wire \emptyset 1.6 | 6 |
| ST70202AST | 6" | 161.0 | 11.2 | 18.5 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |
| ST70203AST | 7" | 187.0 | 13.8 | 30.0 | 57.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |

High Leverage Diagonal Pliers

- High leverage joint design provides greater cutting power while reducing effort to make cuts
- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST72302B-02 | 7" | 190.0 | 13.8 | 30.0 | 60.0 | Copper Wire \emptyset 2.6, Iron Wire \emptyset 2.4, Hard Wire \emptyset 2.0 | 6 |

VDE Insulated Diagonal Pliers



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Anti-slip handle provides superior comfort and grip
- · Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.11M



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|------------------------|---|
| ST70232ST | 6" | 170.0 | 11.5 | 21.0 | 59.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70233ST | 7" | 191.0 | 12.5 | 30.0 | 68.0 | Medium Hard Wire Ø 2.0 | 6 |

Linesman Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | 6 |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70301AST | 6" | 154.0 | 10.0 | 23.5 | 52.0 | Copper Wire \emptyset 2.6, Iron Wire \emptyset 2.4, Hard Wire \emptyset 2.0 | 6 |
| ST70302AST | 7" | 177.0 | 10.5 | 25.0 | 55.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.4, Hard Wire Ø 2.0 | 6 |
| ST70303AST | 8" | 208.0 | 11.5 | 28.5 | 55.0 | Copper Wire Ø 2.6, Iron Wire Ø 2.5, Hard Wire Ø 2.0 | 6 |

VDE Insulated Linesman Pliers



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Anti-slip handle provides superior comfort and grip
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.20M



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | 4 |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|------------------------|---|
| ST70331ST | 6" | 171.0 | 9.5 | 26.0 | 58.0 | Medium Hard Wire Ø 1.6 | 6 |
| ST70332ST | 7" | 184.0 | 10.0 | 28.0 | 58.0 | Medium Hard Wire Ø 2.0 | 6 |
| ST70333ST | 8" | 212.0 | 10.0 | 30.0 | 58.0 | Medium Hard Wire Ø 2.0 | 6 |

Mini Linesman Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70611AST | 4" | 111.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini Long Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- · Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| A | rticle Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|---|-------------|------|---------------------|-----------------------|-------------------|--------------------|--|---|
| S | T70612AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Medium Hard Wire Ø 1.0 | 6 |

Mini Bent Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70613AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini Flat Nose Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|------------------------|-----------------------|-------------------|--------------------|---|---|
| ST70614AST | 5″ | 123.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini Diagonal Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---|---|
| ST70615AST | 4" | 110.5 | 6.5 | 11.0 | 11.0 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Hard Wire Ø 1.0 | 6 |

Mini End Cutting Pliers

- TPE two-tone anti-slip handle provides superior comfort and grip
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- · Clear anti-rust coating prolongs tool life
- Manufactured from chrome-nickel steel for better strength and longer tool life
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|--|---|
| ST70616AST | 4" | 103.5 | 13.0 | 16.5 | 16.5 | Copper Wire Ø 1.5, Iron Wire Ø 1.3, Medium Hard Wire Ø 1.0 | 6 |

VDE Insulated End Cutting Nipper



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Anti-slip handle provides superior comfort and grip
- · Clear anti-rust coating prolongs tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.13M



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|------------------------|-----------------------|-------------------|--------------------|---|
| ST70141ST | 6" | 170.0 | 9.0 | 24.6 | 108.3 | 6 |

End Cutting Pliers

- Heavy duty cutting edges treated with additional induction hardening
- Polished head resists rust and corrosion
- · Professional, ergonomic grips wipe clean easily
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----|
| ST70601ME | 6" | 158.0 | 47.0 | 10 |
| ST70602ME | 8" | 199.0 | 47.0 | 10 |

Groove Joint Pliers

- Angled tooth locking pliers pattern for superior grip
- Interlocking tongue and groove design won't slip
- Multiple jaw positions for optimized handle span and improved gripping comfort
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Anti-slip handle provides superior comfort and grip
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Overall Width (mm) | Pipe Diameter (mm) | |
|--------------|------|---------------------|--------------------|--------------------|--------------------|---|
| ST70411ST | 8" | 208.0 | 10.0 | 48.0 | 4-31 | 6 |
| ST70412ST | 10" | 262.0 | 11.0 | 61.0 | 5-45 | 6 |
| ST70413ST | 12" | 321.0 | 12.0 | 68.0 | 5-54 | 2 |
| ST70414ST | 16" | 426.0 | 17.0 | 71.0 | 10-92 | 3 |

Slip Joint Pliers

- Two different jaw positions with wire cutter near pivot to provide maximum leverage and powerful cutting
- Rivet construction with precision machined joint interlock assures smooth, positive joint action, no chance of slipping position or coming apart under load
- Anti-slip handle provides superior comfort and grip
- Induction hardened with angled teeth grip flat, curved, square or hexagonal objects
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Pipe Diameter (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|-----------------------|---|
| ST70511ST | 6" | 160.0 | 9.5 | 29.0 | 55.0 | 5-30 | 6 |
| ST70512ST | 8" | 208.0 | 10.5 | 31.0 | 55.0 | 6-36 | 6 |

2-piece Double X-Pliers Set

- Jaws open wider than the handles for added reach in tight locations
- Flush rivets are stronger and have a thinner profile
- Compound joint opens wider with less effort and minimal handle movement
- Serrated jaws for precision gripping in restricted areas
- TPE two-tone anti-slip handle provides superior comfort and grip

 Manufactured from Chrome Vanadium Steel (Cr-V) for greater strength and durability

Meets or exceeds ASME B107.500



| Article Code | Content | |
|--------------|---|---|
| ST70003U | 1 - Straight Double-X Pliers 1 - 45° Double-X Pliers | 3 |

Straight Double-X Pliers

- Jaws open wider than the handles for added reach in tight locations
- Flush rivets are stronger and have a thinner profile
- · Compound joint opens wider with less effort and minimal handle movement
- Serrated jaws for precision gripping in restricted areas
- TPE two-tone anti-slip handle provides superior comfort and grip
- Manufactured from Chrome Vanadium Steel (Cr-V) for greater strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | 4 |
|--------------|-------------------|---------------------|-----------------------|-------------------|---|
| ST70711ST | Straight, 13-1/2" | 340.0 | 10.0 | 17.0 | 3 |

45° Double-X Pliers

- Jaws open wider than the handles for added reach in tight locations
- Flush rivets are stronger and have a thinner profile
- Compound joint opens wider with less effort and minimal handle movement
- Serrated jaws for precision gripping in restricted areas
- TPE two-tone anti-slip handle provides superior comfort and grip
- Manufactured from Chrome Vanadium Steel (Cr-V) for greater strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | |
|--------------|--------------|---------------------|-----------------------|-------------------|---|
| ST70721ST | 45°, 13-1/2″ | 355.0 | 10.0 | 17.0 | 3 |

Wire and Cable Cutting Pliers

- Optimized blade angle for cutting copper and aluminum cable
- Professional dipped grips for easy cleaning and better control
- Anti-slip handle provides superior comfort and grip
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|--------------------------|---|
| ST72501ST | 6" | 150.0 | 160.0 | 51.0 | 13.0 | Ø 9 | 6 |
| ST72502ST | 8" | 200.0 | 12.0 | 68.0 | 5-54 | Ø 11 | 6 |
| ST72503ST | 10" | 250.0 | 17.0 | 71.0 | 10-92 | Ø 13 | 6 |

Plastic Flush Cutting Pliers

- Sharp edges for slicing plastic and vinyl-coated cable
- Professional dipped grips for easy cleaning and better control
- Laser hardened cutting edges cut clean and remain sharp 50% longer
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Not for use in cutting metal material
- Meets or exceeds ASME B107.500





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|--------------------|-----------------------|---|
| ST70642ST | 6" | 161.0 | 55.0 | Resin Ø 5 | 6 |

Curved Jaw Locking Pliers

- Versatile curved jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST70621ME | 7" | 189.0 | 13.0 | 52.0 | 52.0 | 6 |
| ST70622ME | 10" | 244.0 | 21.2 | 65.8 | 65.8 | 6 |

Curved Jaw Locking Pliers

- Versatile curved jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500.



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71101ST | 5″ | 144.0 | 6.4 | 37.0 | 38.0 | 6 |
| ST71102ST | 7" | 186.0 | 7.1 | 51.0 | 52.0 | 6 |
| ST71103ST | 10" | 244.0 | 9.7 | 63.0 | 65.8 | 6 |

X-Jaw Locking Pliers

- Versatile X-jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71002 | 10" | 220.0 | 9.7 | 63.0 | 65.8 | 6 |

Straight Jaw Locking Pliers

- Versatile straight jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71202ST | 7" | 185.0 | 11.2 | 51.0 | 52.0 | 6 |
| ST71203ST | 10" | 224.0 | 16.0 | 57.0 | 65.8 | 6 |

Long Nose Locking Pliers

- · Versatile jaw features integral wire cutter
- Angled tooth locking pliers pattern for superior grip
- Compound locking action for powerful non-slip locking grip
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500.



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Capacity (mm) | Max. Cutter Opening (mm) | |
|--------------|------|---------------------|--------------------|-------------------|--------------------------|---|
| ST71301ST | 6" | 169.0 | 4.1 | 62.0 | 7.0 | 6 |
| ST71302ST | 9" | 225.0 | 4.8 | 86.0 | 23 | 6 |

Welding Clamp Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71401SC | 9" | 204.0 | 79.5 | 62.0 | 70.0 | 6 |

Metal Sheet Clamp Locking Pliers

- · Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | |
|--------------|------|---------------------|--------------------|----------------|--------------------|---|
| ST71501SC | 8" | 232.0 | 79.5 | 52.0 | 78.5 | 6 |

C-Clamps Locking Pliers

- Compound action for powerful non-slip locking grip
- Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Capacity (mm) | Jaw Width (mm) | Jaw Depth (mm) | |
|--------------|------|---------------------|--------------------|-------------------|----------------|----------------|---|
| ST71601SC | 11" | 280.0 | 12.7 | 93.0 | 139.7 | 78.0 | 6 |

Chain Clamp Locking Pliers

- · Compound action for powerful non-slip locking grip
- · Aggressive grip pattern on tightening knurl
- Locking mechanism provides strong and stable hold
- · Nickel-plated finish resists rust and corrosion
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Chain Length (mm) | |
|--------------|------|---------------------|--------------------|----------------|-------------------|---|
| ST71701SC | 19" | 213.0 | 5.8 | 60.7 | 485.0 | 6 |

5 Pc. Combination Snap Ring Pliers Set

| Article Code | Content | 6 |
|--------------|---|---|
| ST09251SJ | 1 - Snap Ring Pliers 1 - 1.2 mm Straight Tip 1 - 14 mm Straight Tip 1 - 45° Tip 1 - 90° Tip | 6 |



Snap Ring Pliers


- Professional dipped grips for easy cleaning and better control
- Heat treated for long lasting durability
- Black oxide finish to resist corrosion

| Tempered steel construction offers strength and |
|---|
| durability for long-lasting performance |

Meets or exceeds ASME B107.500

| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | 6 |
|--------------|------------------------------|---------------------------|-----------------|--------------------|---|
| ST72001ST | External, Straight, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |

| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | 6 |
|--------------|----------------------------|---------------------------|-----------------|--------------------|---|
| ST72002ST | External, Curved, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |









| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | 4 |
|--------------|------------------------------|---------------------------|-----------------|--------------------|---|
| ST72004ST | Internal, Straight, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |

| Article Code | Size | Overall Length (mm) | Circlip (mm) | Dia.(±0.2) (mm) | |
|--------------|----------------------------|---------------------------|-----------------|--------------------|---|
| ST72005ST | Internal, Curved, 7" | 175.0 | 19.0 - 60.0 | Ø 1.7 | 6 |









German Style Snap Ring Pliers

- Professional dipped grips for easy cleaning and better control
- Heat treated for long lasting durability
- Black oxide finish to resist corrosion

- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-------------------------|---------------------|--------------|--------------------|-----------------|---|
| ST72011ST | External, Straight, 5" | 142.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72012ST | External, Straight, 7" | 175.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72013ST | External, Straight, 9" | 228.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72014ST | External, Straight, 13" | 325.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-----------------------|---------------------|--------------|--------------------|-----------------|---|
| ST72021ST | External, Curved, 5" | 134.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72022ST | External, Curved, 7" | 163.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72023ST | External, Curved, 9" | 213.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72024ST | External, Curved, 13" | 303.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-------------------------|---------------------|--------------|--------------------|-----------------|---|
| ST72031ST | Internal, Straight, 5" | 141.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72032ST | Internal, Straight, 7" | 180.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72033ST | Internal, Straight, 9" | 230.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72034ST | Internal, Straight, 13" | 317.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |



| Article Code | Size | Overall Length (mm) | Circlip (mm) | Overall Width (mm) | Dia.(±0.2) (mm) | |
|--------------|-----------------------|---------------------|--------------|--------------------|-----------------|---|
| ST72041ST | Internal, Curved, 5" | 133.0 | 10.0 - 18.0 | 50.0 | 1.25 | 6 |
| ST72042ST | Internal, Curved, 7" | 169.0 | 19.0 - 60.0 | 51.0 | 1.75 | 6 |
| ST72043ST | Internal, Curved, 9" | 215.0 | 32.0 - 80.0 | 51.0 | 2.15 | 6 |
| ST72044ST | Internal, Curved, 13" | 297.0 | 80.0 - 140.0 | 50.0 | 2.95 | 6 |

Electrical Wire Stripper and Crimper

- All-purpose tool includes pliers type nose, crimper, wire cutter, stripper and bolt cutter
- Wire Stripping Range: 0.5 6.0 mm
- Crimps insulated and non insulated terminals: non-insulated auto 7 - 8 mm; insulated electrical 22 - 20 to 12 - 10 AWG; electrical 22 - 20 to 22 - 10 AWG
- Bolt cutting range M2.6 to M5
- Professional dipped grips for easy cleaning
- Ergonomic handle with dipping for optimal comfort and control
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST97521ST | 8" | 200.0 | 6 |

Crimping Pliers

- Locking mechanism is easy to operate push button, set and release
- Made of carbon steel with fiberglass handle
- High accuracy crimping pin securely connects connector with cable wire without any damage

Crimping Pliers for D-SUB Terminals

| AWG | Capacity (mm²) |
|---------|----------------|
| 30 - 24 | 0.05 - 0.25 |
| 22 - 18 | 0.5 - 1.0 |





| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|----------|------|---------------------|----------------|---|
| ST91101 | 8" | 204.0 | 67.0 | 4 |

Crimping Pliers for European Cable Terminals

| AWG | Capacity (mm²) |
|---------|----------------|
| 22 - 20 | 0.5 - 0.75 |
| 18 - 16 | 1.0 - 1.5 |
| 16 - 14 | 2.5 |
| 14 - 12 | 4.0 |
| 12 - 10 | 6.0 |





| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|------|---------------------|----------------|---|
| ST91102ST | 8" | 204.0 | 67.0 | 6 |

Crimping Pliers for Coaxial Cable

| Crimping Range (mm²) |
|----------------------|
| 1.72 |
| 2.5 |
| 5.4 |
| 6.48 |
| 8.2 |






| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|----------|---------------------|----------------|---|
| ST91104ST | 9 - 1/2" | 241.0 | 72.0 | 6 |

Crimping Pliers for Insulated Terminals

| AWG | Capacity (mm ²) |
|---------|-----------------------------|
| 22 - 18 | 0.5 - 1.0 |
| 16 - 14 | 1.1 - 2.5 |
| 12 - 10 | 4.0 - 6.0 |





| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|------|---------------------|----------------|---|
| ST91105ST | 9" | 228.0 | 67.0 | 6 |

Crimping Pliers for Non-Insulated Terminals

| AWG | Capacity (mm²) |
|---------|----------------|
| 22 - 16 | 1.5 |
| 16 - 12 | 2.5 - 4.0 |
| 12 - 10 | 6.0 - 8.0 |
| 8 - 6 | 10.0 |





| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|-----------|---------------------|----------------|---|
| ST91106ST | 10 - 1/4" | 260.0 | 76.0 | 6 |

Crimping Pliers for Non-Insulated Terminals

| AWG | Capacity (mm²) |
|---------|----------------|
| 22 - 18 | 0.5 - 1.0 |
| 16 - 14 | 1.1 - 2.5 |
| 12 - 10 | 4.0 - 6.0 |





| Cat. No. | Size | Overall Length (mm) | Jaw Width (mm) | |
|-----------|------|---------------------|----------------|---|
| ST91107ST | 9" | 228.0 | 67.0 | 6 |



5 Pc. File Set 8"

| Article Code | Content | |
|--------------|--|----|
| ST03901ME | 8" Flat File Second Cut 8" Square File Second Cut 8" Three Square File Second Cut 8" Round File Second Cut 8" Half Round File Second Cut | 12 |

5 Pc. 3/8" Medium Ratcheting Tap and Die Drive Tool Set

| Article Code | Content | |
|--------------|---|---|
| ST50402 | 1- Ratcheting T-Handle 1- Small Tap Adapter 1- Medium Tap Adapter 1- Die Adapter 1- T-Handle Bar for Adapters | 5 |





This product is consumable, not within SATA Lifetime Warranty





This product is consumable, not within SATA Lifetime Warranty



Wire Stripper with Cutter

- Accurate wire stripping pin for easy cutting of insulated wire surface without damaging the inner wire
- Professional dipped grips for easy cleaning and better control
- Circlip design for convenient storage
- Made of high carbon steel
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Overall Width (mm) | AWG | Capacity (mm²) | 4 |
|--------------|------|---------------------|-----------------------|-------------------|--------------------|---------|-------------------|---|
| ST91201ST | 6" | 155.0 | 7.5 | 51.0 | 77.0 | 20 - 30 | 0.05 - 0.52 | 6 |
| ST91202ST | 7" | 183.0 | 7.5 | 60.0 | 77.0 | 10 - 22 | 0.52 - 5.26 | 6 |

Automatic Wire Stripper

- Accurate wire stripping pin for easy cutting of insulated wire surface without damaging the inner wire
- Anti-slip handle provides superior comfort and grip
- Adjustable wire stop lets you set exactly how much insulation is removed without the need of marking wires
- Spring mechanism automatically returns back to the open position
- Oxide finish to resist corrosion
- Meets or exceeds ASME B107.500



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Wire Capacity (mm) | |
|--------------|------|---------------------|----------------------|---|
| ST91212ST | 7" | 204.0 | Ø 0.5, 1.2, 1.6, 2.0 | 6 |
| ST91213ST | 7" | 204.0 | Ø 1, 1.6, 2.6, 3.2 | 6 |

Self Adjusting Wire Stripper

- Self-adjusting with hardened steel blades
- Meets or exceeds ASME B107.500



| Article Code | Size | Overall Length (mm) | Jaw Thickness (mm) | Jaw Width (mm) | Wire Stripping Range (mm) | |
|--------------|----------|---------------------|-----------------------|-------------------|---|---|
| ST91108ST | 6 - 1/2" | 170.0 | 18.5 | 80.0 | Single wire or flat cable of diameter from 0.5 to 6.0 | 6 |



Aviation Tin Snips, Left

- Left cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Meets or exceeds ASME B107.16M



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93101ST | 10" | 250.00 | 40.0 | 77.0 | 6 |

Aviation Tin Snips, Right

- Right cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Meets or exceeds ASME B107.16M





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93102ST | 10" | 250.00 | 40.0 | 77.0 | 6 |

Aviation Tin Snips, Straight

- Straight cuts steel up to 1.2 mm (18 ga)
- Induction hardened serrated cutting edges for a long tool life
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Hardened HRC 55 60
- Induction hardened cutting edges 6 62 HRC
- Meets or exceeds ASME B107.16M



| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | |
|--------------|------|---------------------|-------------------|--------------------|---|
| ST93103ST | 10" | 250.0 | 40.0 | 77.0 | 6 |
| ST93104ST | 11" | 275.0 | 80.0 | 77.0 | 6 |



General Long-Blade Scissors

- Stainless steel blades for corrosion resistance, durability and longer tool life
- Precision cut blades for knife-like cutting edges
- Easy adjust pivot bolt allows quick and easy adjustment to fine tune cutting blade tension for optimal cutting performance
- Ambidextrous handle design features symmetrical handle ring contouring for comfortable right or left hand usage
- Straight blades can be sharpened easily
- · Hard plastic handles easily wipe clean
- · Compact, lightweight scissors
- Used for cutting paper, cardboard, thread, and more







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Handed | |
|--------------|------|---------------------|-------------------|--------|---|
| ST93127 | 10" | 250.0 | 88.0 | Both | 4 |

Rubber Grip Long-Blade Scissors

- Precision ground blades for sharper cutting edges and longer blade life
- Off-set angled handle design gives additional clearance and keeps hands above material during cut
- Control channel accommodates index finger for increased control and cutting stability
- Titanium-plated blades for corrosion resistance, durability and longer tool life
- Comfort grip handles with soft-grip texture provide best-in-class comfort and control
- Used for cutting paper, cardboard, heavy fabric, rope, leather, plastics, and more







| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Handed | |
|--------------|------|---------------------|-------------------|--------|---|
| ST93128 | 10" | 250.0 | 100.0 | Right | 4 |

ST93129

RUBBER GRIP LONG-BLADE HEAVY DUTY SCISSORS



Precision ground blades



Spring-loaded design



Full metal core



Comfort grip handles



Quick release ergonomic latch



Used for cutting various materals



Rubber Grip Long-Blade Heavy Duty Scissors

- Precision ground blades for sharper cutting edges and longer blade life
- Spring-loaded design automatically opens when latch is disengaged for reduced hand fatigue
- Full metal core extends through the handle for maximum strength and increased durability
- Serrated bottom blade grips material as it is being cut for increased cutting control and cleaner cuts
- Quick release ergonomic latch provides consistent easy operation and secures the tool in the closed and locked position for safe storage
- Titanium-plated blades for corrosion resistance, durability and longer tool life
- Comfort grip handles with soft-grip texture provide best-in-class comfort and control
- Used for cutting paper, cardboard, heavy fabric, rope, leather, plastics, and more








Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Handed | |
|--------------|------|---------------------|-------------------|--------|---|
| ST93129 | 11" | 280.0 | 100.0 | Both | 4 |

Powerful Multi-Purpose Electricians Scissors

- Precision ground blades for sharper cutting edges and longer blade life
- Serrated cutter back capable of plastic tube boring
- Integrated wire strippers in scissor blade for guick and easy wire stripping
- Grip-Zone area in handles for tightening wire nuts and crimping low voltage connections
- Titanium-plated blades for corrosion resistance, durability and longer tool life
- Comfort grip handles with soft-grip texture provide best-in-class comfort and control







| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Handed | |
|--------------|------|---------------------|-------------------|--------|---|
| ST93125 | 5" | 125.0 | 70.0 | Both | 4 |



Rubber Grip Heavy Duty Scissors

- Precision ground blades for sharper cutting edges and longer blade life
- Compact design allows for easy storage and provides excellent portability
- Internal spring action for smoother operation, avoiding jams
- Quick release ergonomic latch provides consistent easy operation and secures the tool in the closed and locked position for safe storage
- Titanium-plated blades for corrosion resistance, durability and longer tool life
- Comfort grip handles with soft-grip texture provide best-in-class comfort and control
- Used for cutting paper, cardboard, heavy fabric, rope, leather, plastics, and more





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Handed | |
|--------------|------|---------------------|-------------------|--------|---|
| ST93126 | 7" | 180.0 | 44.0 | Both | 4 |

Stainless Steel Scissors

- Heavy-duty blades feature premium grade stainless steel and are precision engineered for knife-like cutting edges
- Durable zinc alloy handle is designed with an enlarged lower ring to fit comfortably in the users' hands
- Long blade design maximizes cutting effort
- Handle grips for easy cleaning and better control
- Used for cutting light-gauge metals, screening, floor tiles, vinyl, plastic, leather, paper, rubber, and more





| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93122 | 7" | 180.0 | Both | 12 |



Antislip Scissors

- With sharp and durable ultra-finished blades
- Optimized blade angle for a precise cutting result
- Spring assist action minimizes hand fatigue
- TPE two-tone anti-slip handle provides superior comfort and grip
- Used for cutting kevlar fabric, copper wire, leather, cardboard, plastic plate, thin aluminum sheet, soft wire, and more







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93121 | 8" | 200.0 | Both | 10 |

Multi-Purpose Scissors

- With sharp and durable ultra-finished blades
- Designed with small-angle cutting edge for cutting hard objects
- Spring assist action minimizes hand fatigue
- Adjustable bolted joint for easy maintenance
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Used for cutting 4-conductor copper cable, soft wire, leather, cardboard, plastic board, thin aluminum sheet, and more







| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93106 | 8" | 200.0 | Both | 10 |

Multi-Purpose Scissors, Curved Blades

- With sharp and durable ultra-finished blades
- Designed with small-angle cutting edge for cutting hard objects
- Spring assist action minimizes hand fatigue
- · Adjustable bolted joint for easy maintenance
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Used for cutting 4-conductor copper cable, soft wire, leather, cardboard, plastic board, thin aluminum sheet, and more





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93107 | 7" | 180.0 | Right | 10 |

Electricians Scissors

- With sharp and durable ultra-finished blades
- Special anti-slip groove for keeping itself from slipping during wire cutting
- Designed with small-angle cutting edge for cutting hard objects
- Spring assist action minimizes hand fatigue
- Adjustable bolted joint for easy maintenance
- Durable two-tone grip provides comfort, control, and slip prevention
- Used for cutting 4-conductor copper cable, soft wire, leather, cardboard, plastic board, thin aluminum sheet, and more





| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93105 | 7" | 180.0 | Both | 10 |



Diagonal Cutter

- With sharp and durable ultra-finished blades
- Optimized blade angle for a precise cutting result
- Spring assist action minimizes hand fatigue
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Used for cutting 4-conductor copper cable, soft wire up to 0.5 mm in diameter, and more





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93110 | 7" | 180.0 | Both | 10 |

Heavy Duty Cable Cutter

- With sharp and durable ultra-finished blades
- Optimized blade angle for a precise cutting result
- Spring assist action minimizes hand fatigue
- Adjustable bolted joint for easy maintenance
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Used for cutting copper, aluminum cables up to 16 mm in diameter, and more






| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93109 | 7 | 180.0 | Both | 10 |

Coaxial Cable Cutter

- With sharp and durable ultra-finished blades
- Optimized blade angle for a precise cutting result
- · Spring assist action minimizes hand fatigue
- Adjustable bolted joint for easy maintenance
- Optimized hand & finger contact points in handle to maximize fit, control, and user ergonomics
- Used for cutting copper, aluminum cables up to 10 mm in diameter, and more







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|----|
| ST93108 | 7" | 180.0 | Both | 10 |

Straight Pattern Tinner's Snips

- With sharp and durable ultra-finished blades
- High frequency quenching during manufacturing ensures a harded edge with a smooth cut
- Superior design prevents tears at end of cuts by controlling blade bypass; minimizes folding and burrs
- Retractable spring for easy storage
- Heat treated for long lasting durability
- Professional dipped grips for easy cleaning and better control
- · Bright, full polish finish easily wipes clean and resists corrosion





| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|---|
| ST93201 | 8" | 200.0 | Both | 6 |
| ST93202 | 10" | 250.0 | Both | 6 |
| ST93203 | 12" | 300.0 | Both | 6 |
| ST93204 | 14" | 350.0 | Both | 5 |

Straight Pattern Tinner's Snip

- · Cuts cold rolled steel
- Drop forged construction
- Induction hardened serrated cutting edges for a long tool life
- · Comfort grips for ease of use and slip protection
- For trimming extra heavy stock
- Meets or exceeds ASME B107.16M



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Blade Length (mm) | Overall Width (mm) | Cold Rolled Iron Sheet (mm) | Stainless Steel Sheet (mm) | |
|--------------|------|---------------------|----------------------|--------------------|--------------------------------|-------------------------------|----|
| ST93302ST | 8" | 205.0 | 40.0 | 87.0 | 0.61 | 0.41 | 6 |
| ST93303ST | 10" | 254.0 | 60.0 | 105.0 | 0.78 | 0.45 | 6 |
| ST93304ST | 12" | 305.0 | 70.0 | 110.0 | 0.91 | 0.63 | 12 |
| ST93305ST | 14" | 355.0 | 90.0 | 110.0 | 1.2 | 0.7 | 6 |
| ST93306ST | 16" | 425.0 | 100.0 | 145.0 | 1.6 | 1.0 | 6 |

Heavy Duty Bolt Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Cuts low carbon steel and carbon steel
- Center cut jaws
- · Ergonomic non-slip grips for safe cutting
- Adjustable jaw for better cuts, depending on the material
- Hardened steel jaws with angled cutting grooves
- Meets or exceeds ASME B107.16M





| Article Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|--------------------|---|---|
| ST93501SC | 8" | 212.5 | 63.5 | Low Carbon Steel \emptyset 3.17 (1/8"), Medium Carbon Steel \emptyset 3.17 (1/8") | 6 |

Heavy Duty Bolt Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Cuts low carbon steel and carbon steel
- Center cut jaws
- Ergonomic non-slip grips for safe cutting
- Adjustable jaw for better cuts, depending on the material
- Hardened steel jaws with angled cutting grooves
- Meets or exceeds ASME B107.16M



| Article Code | Size | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|------|---------------------|--------------------|--|---|
| ST93502ST | 12" | 325.0 | 139.0 | Low Carbon Steel Ø 5(3/16"), Medium Carbon Steel Ø 4(5/12") | 1 |
| ST93503ST | 14" | 370.0 | 140.0 | Low Carbon Steel Ø 7 (1/4"), Medium Carbon Steel Ø 5 (3/16") | 1 |
| ST93504ST | 18" | 470.0 | 141.0 | Low Carbon Steel Ø 8 (5/16"), Medium Carbon Steel Ø 6 (1/4") | 1 |
| ST93505ST | 24" | 634.0 | 160.0 | Low Carbon Steel Ø 10 (3/8"), Medium Carbon Steel Ø 8 (5/16") | 1 |
| ST93506ST | 30" | 765.0 | 180.0 | Low Carbon Steel Ø 13 (1/2"), Medium Carbon Steel Ø 10 (3/8") | 1 |
| ST93507ST | 36" | 917.0 | 190.0 | Low Carbon Steel Ø 16 (5/8"), Medium Carbon Steel Ø 12 (7/16") | 1 |
| ST93508ST | 42" | 1053.0 | 210.0 | Low Carbon Steel Ø 19 (3/4"), Medium Carbon Steel Ø 14 (9/16") | 1 |
| ST93509ST | 48" | 1213.0 | 250.0 | Low Carbon Steel Ø 22 (7/8"), Medium Carbon Steel Ø 16 (5/8") | 1 |

Wire Rope Cutter

- Optimized blade angle for a precise cutting result
- Anti-slip handles provide superior comfort and grip
- Blades made of chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Used for cutting steel cable, coarse or fine stranded cable, wire rope, spring steel wire, and more







| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|---|
| ST93601 | 8" | 200.0 | Both | 6 |

Wire Rope Cutter

- Optimized blade angle for a precise cutting result
- Anti-slip handles provide superior comfort and grip
- Handles constructed from aluminum alloy for lightness and durability
- Blades made of chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Used for cutting wire rope (Ø5 mm), spring steel wire (Ø1.6 mm), steel cable, coarse or fine stranded cable, and more







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Handed | |
|--------------|------|---------------------|--------|---|
| ST93603 | 24" | 600.0 | Both | 1 |

Zinc Alloy Snap-Off Knife, 13-Point

- Steel blade sleeve for increased durability
- Body made of durable zinc alloy steel for longer tool life
- SK2 blades available for extended blade life
- Compact, ergonomic design
- Replacement Blades: ST93432A







| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93424A | 80.0 | 9.0 | 0.4 | 12 |

Zinc Alloy Snap-Off Knife, 8-Point

- Steel blade sleeve for increased durability
- Body made of durable zinc alloy steel for longer tool life
- SK2 blades available for extended blade life
- · Compact, ergonomic design
- Replacement Blades: ST93436, ST93433A & ST93437







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93425A | 100.0 | 18.0 | 0.5 | 8 |

Plastic Snap-off Knife, 13-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- 13-point snap-off blade
- Replacement Blades: ST93432A





| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93426SC | 80.0 | 9.0 | 0.4 | 12 |

Rubber Grip Snap-off Knife, 8-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- Comfort grip for ease of use and slip protection
- · 8-point snap-off blade
- Replacement Blades: ST93436, ST93433A & ST93437





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93428SC | 100.0 | 18.0 | 0.5 | 12 |

Plastic Snap-Off Knife, 8-Point

- Steel blade sleeve for increased durability
- Durable ABS housing prolongs tool life
- SK2 blades available for extended blade life
- · Comfort grip for ease of use and slip protection
- · Ergonomic grip reducing hand fatigue
- Replacement Blades: ST93436, ST93433A & ST93437







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93422A | 100.0 | 18.0 | 0.5 | 10 |

Plastic Snap-off Knife, 8-point

- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Steel blade sleeve for increased durability
- Comfort grip for ease of use and slip protection
- 8-point snap-off blade
- Replacement Blades: ST93433A & ST93437





| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | 4 |
|--------------|-------------------|------------------|----------------------|----|
| ST93429 | 100.0 | 18.0 | 0.5 | 12 |

T Series Rubber Grip Snap-Off Knife, 13-Point

- Steel blade sleeve for increased durability
- Unique dual material case with thumb bridge for added comfort
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Replacement Blades: ST93432A







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93481 | 80.0 | 9.0 | 0.4 | 12 |

T Series 18 mm Soft Grip Utility Knife

- Steel blade sleeve for increased durability
- Unique dual material case with thumb bridge for added comfort
- Built in blade snapper that slides out of the body for easy access
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Replacement Blades: ST93433A & ST93437





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93482 | 100.0 | 18.0 | 0.5 | 8 |

T Series Rubber Grip Snap-Off Knife, 7-Point

- Steel blade sleeve for increased durability
- Unique dual material case with thumb bridge for added comfort
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Replacement Blades: ST93438







| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93483 | 125.0 | 25.0 | 0.5 | 6 |

Folding Utility Knife

- Blade locks in the open position for secure cutting
- Easy access blade storage compartment in the body holds additional blades
- Quick blade replacement for user convenience
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Includes one loaded blade
- Replacement Blades: ST93434A & ST93435A



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93486 | 60.0 | 19.0 | 0.6 | 8 |

Zinc Alloy Utility Knife

- Zinc phosphate coating for corrosion resistance
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Easy access blade storage compartment in the body holds additional blades
- Includes 5 spare blades which are stored inside the body
- Replacement Blades: ST93434A & ST93435A





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93441SC | 60.0 | 19.0 | 0.6 | 6 |

Self-Retracting Utility Knife

- Blade automatically retracts when it loses contact with cut material to ensure safety when cutting
- Easy access blade storage compartment in the body holds additional blades
- Quick blade replacement for user convenience
- Unique dual material, ergonomically designed comfort grip. Ideal for repeated cuts
- Includes 5 professional spare blades made from SK2 carbon steel
- Replacement Blades: ST93434A & ST93435A





| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93442SC | 60.0 | 19.0 | 0.6 | 8 |

Heavy Duty Utility Knife

- Zinc phosphate coating for corrosion resistance
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Includes 5 spare blades which are stored inside the body
- Replacement Blades: ST93434A & ST93435A





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93443SC | 60.0 | 19.0 | 0.6 | 8 |

Multipurpose Zinc Alloy Utility Knife

- · Zinc phosphate coating for corrosion resistance
- Rotate lock design
- SK2 blades available for extended blade life
- Comfort grip for ease of use and slip protection
- Includes 5 spare blades which are stored inside the body
- Replacement Blades: ST93434A & ST93435A



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93446SC | 60.0 | 19.0 | 0.6 | 8 |

Auto-Retracting Safety Utility Knife

- · Blade retracts automatically the moment it loses contact with the material being cut
- Unique dual material case with thumb bridge for added comfort
- SK2 blades available for extended blade life
- Ergonomic dual material improves grip while reducing hand fatigue
- Blade storage compartment in the handle holds additional blades for easy access
- Auto-retract mechanism cannot be overridden under normal use
- Blade retracts on loss of contact even if the user is still holding the blade slider forward in the 'open' position
- Helps reduce workplace injuries, lowering lost time and increasing productivity
- Quick and easy blade change
- Replacement Blades: ST93434A & ST93435A





| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|---|
| ST93485 | 60.0 | 19.0 | 0.6 | 8 |

10 Pc. Spare Blades, 7-Point

- · High quality, SK2 steel utility knife blades with sharp points
- Includes 10 blades, 2 in black and 8 in silver
- 7-point snap-off design keeps the blade always sharp and ready to go
- Suitable for ST93483





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93438 | 125.0 | 25.0 | 0.5 | 12 |

10 Pc. Spare Blades, 8-Point

- · High quality, SK2 steel utility knife blades with sharp points
- Contains 10 silver blades
- 8-point snap-off design keeps the blade always sharp and ready to go
- Suitable for ST93422A, ST93425A and ST93428SC





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93436 | 100.0 | 18.0 | 0.5 | 10 |

10 Pc. Spare Blades, 8-Point

- High quality, SK2 steel utility knife blades with sharp points
- Includes 10 blades, 2 in black and 8 in silver
- 8-point snap-off design keeps the blade always sharp and ready to go
- Suitable for ST93422A, ST93425A, ST93428SC, ST93429 and ST93482





| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93433A | 100.0 | 18.0 | 0.5 | 10 |

10 Pc. Spare Blades, 13-Point

- High quality, SK2 steel utility knife blades with sharp points
- Includes 10 blades, 2 in black and 8 in silver
- 13-point snap-off design keeps the blade always sharp and ready to go
- Suitable for ST93424A, 93426SC and ST93481





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93432A | 80.0 | 9.0 | 0. | 10 |

10 Pc. Spare Blades, 15-Point

- · High quality, SK2 steel utility knife blades with sharp points
- Includes 10 blades, 2 in black and 8 in silver
- 15-point snap-off design keeps the blade always sharp and ready to go
- Suitable for ST93422A, ST93425A, ST93428SC, ST93429 and ST93482





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93437 | 100.0 | 18.0 | 0.5 | 10 |

10 Pc. Spare Utility Blades

- High quality, SK2 steel utility knife blades with sharp points
- Contains 10 silver blades
- Blade packaging is designed to safely and easily access spare blades reducing risk of injury
- Suitable for ST93441SC, ST93442SC, ST93443SC, ST93446SC, ST93485 and ST93486







| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93434A | 60.0 | 19.0 | 0.6 | 18 |

100 Pc. Spare Utility Blades

- · High quality, SK2 steel utility knife blades with sharp points
- Contains 100 silver blades
- Blade packaging is designed to safely and easily access spare blades reducing risk of injury
- Suitable for ST93441SC, ST93442SC, ST93443SC, ST93446SC, ST93485 and ST93486



♠

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Blade Length (mm) | Blade Width (mm) | Blade Thickness (mm) | |
|--------------|-------------------|------------------|----------------------|----|
| ST93435A | 60.0 | 19.0 | 0.6 | 12 |

Wire Stripping Knife, Straight Blades

- With sharp and durable ultra-finished blade
- Durable two-tone grip provides comfort, control, and slip prevention
- For use in electric power and related industry wire and cable work





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Total Length (mm) | |
|--------------|-------------------|----|
| ST93473 | 185.0 | 10 |

Wire Stripping Knife, Curved Blades

- With sharp and durable ultra-finished blade
- Durable two-tone grip provides comfort, control, and slip prevention
- Scythe hook blade with sliding guard on cutting tip ensures blade will not damage inner core of the wire
- For use in electric power and related industry wire and cable work





| Article Code | Total Length (mm) | |
|--------------|-------------------|----|
| ST93474 | 185.0 | 10 |

VDE Cable Knife



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- With sharp and durable ultra-finished blade
- Durable two-tone grip provides comfort, control, and slip prevention
- Scythe hook blade with sliding guard on cutting tip ensures blade will not damage inner core of the wire
- For use in electric power and related industry wire and cable work
- Red color for quick identification of VDE



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Total Length (mm) | |
|--------------|-------------------|---|
| ST93470SC | 185.0 | 6 |

Mini Tubing Cutter

- Ideal for handyman, plumbers, electricians and vehicle mechanics
- Large knurled knob for non-slip grip and precise control
- Compact size for use in tight spaces





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|-----------------------|---|
| ST97305ST | 197.0 | 155.0 | 3 - 16 (0.12" - 5/8") | 6 |

Tubing Cutter

- Durable steel construction
- Large knurled handle for maximum grip power
- Spare cutter wheel stored in the handle





| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|------------------------|----|
| ST97301ST | 245.0 | 210.0 | 3 - 28 (0.12 - 1.18") | 12 |
| ST97302ST | 245.0 | 210.0 | 3 - 32 (0.12 - 1-1/4") | 12 |

Tubing Cutter

- Durable steel construction
- · Large knurled handle for maximum grip power
- Spare cutter wheel stored in the handle





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Length (mm) | Overall Width (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|--------------------|------------------------|----|
| ST97303ST | 300.0 | 140.0 | 6 - 64 (1/4" - 2-1/2") | 12 |

2 Pc. Replacement Cutter Wheels

- · For cutting copper, aluminum, brass and thin wall tubing
- Tempered steel offers strength and durability for longlasting performance
- Black oxide finish to resist corrosion
- Blade for ST97301ST, ST97302ST and ST97305ST Tubing Cutter





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Width (mm) | Overall Lenght (mm) | Cutting Capacity (mm) | |
|--------------|--------------------|---------------------|-----------------------|----|
| ST97311ST | 155.0 | 197.0 | 3.0 x 18.0 | 12 |

2 Pc. Replacement Cutter Wheels

- For cutting copper, aluminum, brass and thin wall tubing
- Tempered steel offers strength and durability for longlasting performance
- Black oxide finish to resist corrosion
- Blade for ST97303ST Tubing Cutter





| Article Code | Cutting Capacity (mm) | |
|--------------|------------------------|---|
| ST97312ST | 6.2 x 18.0, 6.2 x 22.0 | 6 |

PVC Pipe Cutter

- Heat treated stainless steel blade for long lasting durability
- Handle latch keeps tool closed during storage or when not in use





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Cutting Capacity (mm) | |
|--------------|----------------------------|---|
| ST97304ST | 3.0 - 42.0 (0.1" - 1-1/2") | 6 |

Ratcheting Cable Cutter

- Drop forged, precision ground alloy steel jaws for maximum durability and cut life
- Special ratcheting tooth mechanism
- Ergonomic handles and ratcheting action for comfort during repeated cuts
- Compact and leightweight design





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Overall Length (mm) | Cutting Capacity (mm) | |
|--------------|---------------------|-------------------------|---|
| ST72511 | 245.0 | up to 240 mm² (0.372°²) | 3 |

Mini Hack Saw

- ABS handle provides comfort and durability
- Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability
- One bi-metal 6" saw blade included





| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST93404 | 6" | 150.0 | 6 |

Aluminum Hacksaw

- · Ergonomic handle increases overall comfort
- Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability
- One bi-metal 12" saw blade included





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST93405SC | 12" | 300.0 | 6 |

Wood Handle Hacksaw

- Solid steel body construction for strength and durability
- Heat treated tension and butterfly fastening bolts ensure longer tool life
- Comfortable and ergonomic beech handles improves grip while reducing hand fatigue
- · Lightweight ergonomic design





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| | | * | |
|--------------|------|---------------------|---|
| Article Code | Size | Overall Length (mm) | |
| ST93413 | 12" | 300.0 | 6 |

3 Pc. Mini Hacksaw Blades

- Durable and resilient sawtooth design for smoother cuts with less friction
- 3 blades per package
- For Mini Hacksaw ST93404





| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| ST93411 | 6" | 150.0 | 12 |

12" Hacksaw Blade



- Saw blade constructed from high-speed-steel for strength and to maintain sharpness for smooth cutting
- Precision hardened teeth for improved cutting performance
- High frequency heat treated teeth maintains sharpness over tool life
- For cutting metals such as stainless steel, alloy steel, bearing steel, carbon steel, spring steel, cast iron, aluminum and copper



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Numberm of Teeth | Application | |
|--------------|------|---------------------|------------------|--|----|
| ST93416 | 12" | 300.0 | 18 | For sawing 1/4" to 1" thick material | 10 |
| ST93417 | 12" | 300.0 | 24 | For sawing 1/8" to 1/4" thick material | 10 |
| ST93418 | 12" | 300.0 | 32 | For sawing 1/8" or thinner material | 10 |

100 Pc. Bi-Metal Saw Blade

- · Sawtooth body made of high quality spring steel
- Sawtooth edges made of high-speed steel
- Powerful and sharp sawtooth, for smooth cutting and long lasting durability





| Article Code | Size | Teeth per inch | Application | |
|--------------|------|----------------|---|---|
| ST93404ME | 12" | 18 | For sawing 1/4" to 1" thick material, pipe, angle iron and steel bar | 1 |
| ST93405ME | 12" | 24 | For sawing 1/8" to 1/4" thick material, conduit, heavy steel metal and tubing | 1 |
| ST93406ME | 12" | 32 | For sawing 1/8" or thinner metal, thin sheet metal and metal trim | 1 |

Wood Handle Hand Saw

- Precision hardened teeth for improved cutting performance
- Hardened area at cutting edge around each tooth, softer core avoids tooth rippage
- Teeth sharpened on both sides to provide faster and cleaner cuts
- High frequency heat treated teeth to maintain sharpness
- For cutting wood fiber

 \triangle

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Overall Length (mm) | Teeth per inch | |
|--------------|------|---------------------|----------------|---|
| ST93621ME | 16" | 400.0 | 7 | 6 |
| ST93622ME | 18" | 450.0 | 7 | 6 |
| ST93623ME | 20" | 500.0 | 7 | 6 |
| ST93624ME | 22" | 550.0 | 7 | 6 |
| ST93625ME | 24" | 600.0 | 7 | 6 |

Bi-Metal Hole Saw

- Designed to cut wood, copper, aluminum, metal and stainless steel
- High-speed, HRC 65 68 steel constructed teeth for faster cutting and longevity
- Body constructed from alloy steel sheet for superior safety and durability
- Specialized tooth design for higher cutting efficiency



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | |
|--------------|---------|----|
| ST53301 | 16.0 mm | 20 |
| ST53302 | 19.0 mm | 20 |
| ST53303 | 20.0 mm | 20 |
| ST53304 | 22.0 mm | 20 |
| ST53305 | 25.0 mm | 20 |
| ST53306 | 30.0 mm | 20 |
| ST53307 | 32.0 mm | 12 |

| Article Code | Size | |
|--------------|---------|----|
| ST53308 | 35.0 mm | 12 |
| ST53309 | 38.0 mm | 12 |
| ST53310 | 44.0 mm | 18 |
| ST53311 | 51.0 mm | 18 |
| ST53312 | 57.0 mm | 12 |
| ST53313 | 60.0 mm | 12 |
| ST53314 | 64.0 mm | 12 |

Hole Saw Arbor

- Used for connecting the hole saw and drill chuck, and also for positioning when the hole saw is working
- Guide drill bit made of high speed alloy steel for strength and durability
- Quick release spring allows the round disc to easily be taken out after cutting




Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Applicable Aperture (mm) | Drill Pipe Diameter (mm) | |
|--------------|--------------------------|--------------------------|----|
| ST53401 | 14.0 - 30.0 | 9.5 | 16 |
| ST53402 | 32.0 - 152.0 | 11.1 | 12 |







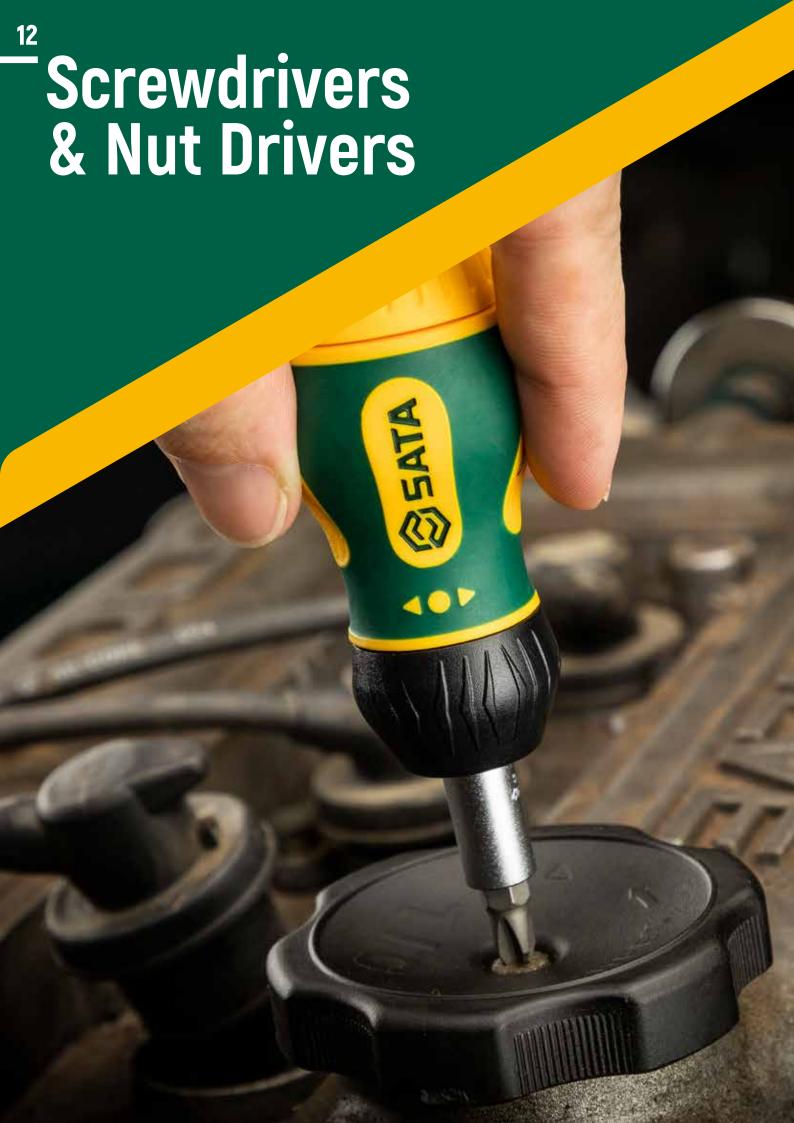

6 Pc. Acetate Combination Screwdriver Set

| Article Code | Content | |
|--------------|--|---|
| ST09303ESJ | 3 - Acetate Screwdrivers Phillips #0x75 mm , #1x100 mm, #2x100 mm 3 - Acetate Screwdrivers Slotted 3.2x75 mm, 5x75 mm, 6x100 mm | 5 |

8 Pc. Acetate Combination Screwdriver Set

| Article Code | Content | |
|--------------|---|---|
| ST09306SJ | 4 - Acetate Screwdrivers Phillips #1x75 mm, #2x38 mm, #2x100 mm, #2x150 mm 4 - Acetate Screwdrivers Slotted 5x75 mm, 6x38 mm, 6x100 mm, 6x150 mm | 5 |





10 Pc. Acetate Combination Screwdriver Set

| Article Code | Content | |
|--------------|---|---|
| ST09304ESJ | 5 - Acetate Screwdrivers Phillips #1x100 mm, #2x38 mm, #2x100 mm, #2x150 mm, #3x150 mm 5 - Acetate Screwdrivers Slotted 5x75 mm, 6x38 mm, 6x100 mm, 6x150 mm, 8x150 mm | 4 |

8 Pc. Acetate Torx® Screwdriver Set

| Article Code | Content | |
|--------------|--|---|
| ST09305SJ | T8x75 mm, T10x100 mm, T15x100 mm, T20x100 mm, T25x100 mm, T27x100 mm, T30x100 mm, T40x100 mm | 5 |





Acetate Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds ASME B107.600



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|----|
| ST62202SC | 3.2 | 75.0 | 146.0 | 23.0 | 12 |
| ST62203SC | 3.2 | 100.0 | 172.0 | 23.0 | 12 |
| ST62204SC | 3.2 | 150.0 | 221.0 | 23.0 | 12 |
| ST62205SC | 3.2 | 200.0 | 271.0 | 23.0 | 12 |
| ST62207SC | 5.0 | 75.0 | 165.0 | 28.0 | 12 |
| ST62208SC | 5.0 | 100.0 | 190.0 | 28.0 | 12 |
| ST62209SC | 5.0 | 150.0 | 240.0 | 28.0 | 6 |
| ST62210SC | 5.0 | 200.0 | 290.0 | 28.0 | 12 |
| ST62211SC | 6.0 | 38.0 | 99.0 | 35.0 | 6 |
| ST62212SC | 6.0 | 100.0 | 202.0 | 32.0 | 12 |
| ST62213SC | 6.0 | 150.0 | 252.0 | 32.0 | 12 |
| ST62214SC | 6.0 | 200.0 | 312.0 | 32.0 | 12 |
| ST62215SC | 6.0 | 250.0 | 352.0 | 32.0 | 12 |
| ST62216SC | 8.0 | 150.0 | 260.0 | 35.0 | 12 |
| ST62217SC | 8.0 | 200.0 | 312.0 | 35.0 | 12 |

Acetate Screwdriver Phillips

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds ASME B107.600



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST62302SC | #0 | 75.0 | 146.0 | 23.0 | 6 |
| ST62303SC | #0 | 100.0 | 221.0 | 23.0 | 6 |
| ST62304SC | #0 | 150.0 | 222.0 | 23.0 | 6 |
| ST62305SC | #0 | 200.0 | 272.0 | 23.0 | 6 |
| ST62307SC | #1 | 75.0 | 166.0 | 28.0 | 6 |
| ST62308SC | #1 | 100.0 | 190.0 | 28.0 | 6 |
| ST62309SC | #1 | 150.0 | 240.0 | 28.0 | 6 |
| ST62310SC | #1 | 200.0 | 288.0 | 28.0 | 6 |
| ST62311SC | #2 | 38.0 | 99.0 | 35.0 | 6 |
| ST62312SC | #2 | 100.0 | 202.0 | 32.0 | 6 |
| ST62313SC | #2 | 150.0 | 250.0 | 32.0 | 6 |
| ST62314SC | #2 | 200.0 | 312.0 | 32.0 | 6 |
| ST62315SC | #2 | 250.0 | 325.0 | 32.0 | 6 |
| ST62316SC | #3 | 150.0 | 260.0 | 35.0 | 6 |
| ST62317SC | #3 | 200.0 | 312.0 | 35.0 | 6 |

Acetate Screwdriver Torx®

- Blade is made of high performance alloy steel for maximum strength and durability
- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Tempered steel construction offers strength and durability for long-lasting performance
- Meets or exceeds Camcar TXF-705



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61108SC | T8 | 75.0 | 147.0 | 23.0 | 6 |
| ST61101SC | T10 | 100.0 | 190.0 | 28.0 | 6 |
| ST61102SC | T15 | 100.0 | 190.0 | 28.0 | 6 |
| ST61103SC | T20 | 100.0 | 190.0 | 28.0 | 6 |
| ST61104SC | T25 | 100.0 | 312.0 | 32.0 | 6 |
| ST61105SC | T27 | 100.0 | 202.0 | 32.0 | 6 |
| ST61106SC | T30 | 100.0 | 202.0 | 32.0 | 6 |
| ST61107SC | T40 | 100.0 | 212.0 | 35.0 | 6 |

Nut Driver

- Ergonomic acetate handle provides increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|----|
| ST61503SC | 7.0 | 75.0 | 178.0 | 23.0 | 12 |
| ST61504SC | 8.0 | 75.0 | 178.0 | 23.0 | 12 |
| ST61505SC | 9.0 | 75.0 | 178.0 | 23.0 | 12 |
| ST61506SC | 10.0 | 75.0 | 190.0 | 23.0 | 6 |
| ST61507SC | 11.0 | 75.0 | 190.0 | 23.0 | 6 |
| ST61508SC | 12.0 | 75.0 | 190.0 | 23.0 | 6 |

1/4" Drive Magnetic Bit Driver

- Magnetic bit holder for fastener retention
- Ergonomic acetate handles provide increased comfort and maximized torque
- 100% solid impact resistant acetate handle for lasting durability
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Meets or exceeds ASME B107.110



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61002SC | 1/4" | 100.0 | 212.0 | 35.0 | 6 |

6 Pc. Dual Material Soft Grip Combination Screwdriver Set

| Article Code | Content | 4 |
|--------------|--|---|
| ST09309SJ | 3 - Dual Material Soft Grip Screwdrivers Phillips #1x75 mm, #2x100 mm, #2x150 mm 3 - Dual Material Soft Grip Screwdrivers Slotted 5x75 mm, 5x100 mm, 6x150 mm | 6 |



Dual Material Soft Grip Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST63402SC | 3.2 | 75.0 | 160.0 | 25.0 | 6 |
| ST63403SC | 3.2 | 100.0 | 185.0 | 25.0 | 6 |
| ST63404SC | 3.2 | 150.0 | 235.0 | 25.0 | 6 |
| ST63405SC | 3.2 | 200.0 | 286.0 | 25.0 | 6 |
| ST63407SC | 5.0 | 75.0 | 180.0 | 31.0 | 6 |
| ST63408SC | 5.0 | 100.0 | 205.0 | 31.0 | 6 |
| ST63409SC | 5.0 | 150.0 | 255.0 | 31.0 | 6 |
| ST63410SC | 5.0 | 200.0 | 306.0 | 31.0 | 6 |
| ST63411SC | 6.0 | 38.0 | 98.0 | 37.0 | 6 |
| ST63412SC | 6.0 | 100.0 | 217.0 | 35.0 | 6 |
| ST63413SC | 6.0 | 150.0 | 267.0 | 35.0 | 6 |
| ST63414SC | 6.0 | 200.0 | 317.0 | 35.0 | 6 |
| ST63415SC | 6.0 | 250.0 | 367.0 | 35.0 | 6 |
| ST63416SC | 8.0 | 150.0 | 276.0 | 38.0 | 6 |
| ST63417SC | 8.0 | 200.0 | 326.0 | 38.0 | 6 |

Dual Material Soft Grip Screwdriver Phillips

- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST63502SC | #0 | 75.0 | 160.0 | 25.0 | 6 |
| ST63503SC | #0 | 100.0 | 185.0 | 25.0 | 6 |
| ST63504SC | #0 | 150.0 | 235.0 | 25.0 | 6 |
| ST63505SC | #0 | 200.0 | 286.0 | 25.0 | 6 |
| ST63507SC | #1 | 75.0 | 180.0 | 31.0 | 6 |
| ST63508SC | #1 | 100.0 | 205.0 | 31.0 | 6 |
| ST63509SC | #1 | 150.0 | 255.0 | 31.0 | 6 |
| ST63510SC | #1 | 200.0 | 305.0 | 31.0 | 6 |
| ST63511SC | #2 | 38.0 | 98.0 | 37.0 | 6 |
| ST63512SC | #2 | 100.0 | 217.0 | 35.0 | 6 |
| ST63513SC | #2 | 150.0 | 267.0 | 35.0 | 6 |
| ST63514SC | #2 | 200.0 | 317.0 | 35.0 | 6 |
| ST63515SC | #2 | 250.0 | 367.0 | 35.0 | 6 |
| ST63516SC | #3 | 150.0 | 276.0 | 38.0 | 6 |
| ST63517SC | #3 | 200.0 | 326.0 | 38.0 | 6 |

Dual Material Soft Grip Reversible Screwdriver

- Blade is made of high performance alloy steel for maximum strength and durability
- Reversible tip for Phillips and Slotted applications
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | 6 |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST66202SC | #2x6.0 mm | 38.0 | 98.0 | 37.0 | 6 |
| ST66203SC | #1x5.0 mm | 100.0 | 220.0 | 35.0 | 6 |
| ST66204SC | #2x6.0 mm | 100.0 | 220.0 | 35.0 | 6 |
| ST66205SC | #1x5.0 mm | 150.0 | 270.0 | 35.0 | 6 |
| ST66206SC | #2x6.0 mm | 150.0 | 270.0 | 35.0 | 6 |

Dual Material Soft Grip Go-Through Screwdriver Slotted

- Blade is made of high performance alloy steel for maximum strength and durability
- Through-metal shaft and cap for striking
- High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST61603SC | 6.0 | 100.0 | 220.0 | 34.0 | 6 |
| ST61605SC | 6.0 | 150.0 | 269.0 | 34.0 | 6 |
| ST61606SC | 8.0 | 150.0 | 280.0 | 38.0 | 6 |
| ST61607SC | 8.0 | 200.0 | 330.0 | 38.0 | 6 |
| ST61608SC | 8.0 | 250.0 | 380.0 | 38.0 | 6 |

Dual Material Soft Grip Go-Through Screwdriver Phillips

- · Blade is made of high performance alloy steel for maximum strength and durability
- Through-metal shaft and cap for striking
- · High-impact, dual material soft grip handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.600



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61703SC | #2 | 100.0 | 220.0 | 34.0 | 6 |
| ST61705SC | #2 | 150.0 | 269.0 | 34.0 | 6 |
| ST61706SC | #3 | 150.0 | 280.0 | 38.0 | 6 |
| ST61707SC | #3 | 200.0 | 330.0 | 38.0 | 6 |
| ST61708SC | #3 | 250.0 | 380.0 | 38.0 | 6 |

5 Pc. T-Series VDE Insulated **Screwdriver Set**



→ 7 Pc. T-Series VDE Insulated **Screwdriver Set**



| Article Code | Content | |
|--------------|--|---|
| ST09302U | 2 - VDE Insulated Screwdrivers Slotted 3.0 x100 mm, 5.5 x125 mm 2 - VDE Insulated Screwdrivers Phillips 1x80 mm, 2x100 mm 1 - Circuit Tester | 6 |

| Article Code | Content | |
|--------------|---|----|
| ST09303 | 3 - VDE Insulated Screwdrivers Phillips #0x60 mm, #1x80 mm, #2x100 mm 4 - VDE Insulated Screwdrivers Slotted 2.5x75 mm, 4.x100 mm, 5.5x125 mm, 6.5x150 mm | 10 |



T-Series VDE Insulated Screwdrivers - Slotted



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage



| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|----|
| ST61321SC | 2.5 | 75.0 | 163.0 | 25.0 | 12 |
| ST61322SC | 3.0 | 100.0 | 187.0 | 25.0 | 12 |
| ST61323SC | 4.0 | 100.0 | 205.0 | 31.0 | 12 |
| ST61324SC | 5.5 | 125.0 | 245.0 | 35.0 | 12 |
| ST61325SC | 6.5 | 150.0 | 270.0 | 35.0 | 12 |

T-Series VDE Insulated Screwdrivers - Phillips



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|----|
| ST61221SC | #0 | 60.0 | 147.0 | 25.0 | 12 |
| ST61222SC | #1 | 80.0 | 188.0 | 31.0 | 12 |
| ST61223SC | #2 | 100.0 | 220.0 | 35.0 | 12 |
| ST61224SC | #3 | 150.0 | 280.0 | 38.0 | 6 |

G-Series VDE Insulated Screwdrivers - Slotted



- VDE Certified
- For use in high voltage areas, up to 1000 V alternating current
- Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- · Oil and solvent resistant handle provides a longer tool life
- · Handle designed with "through hole" for easy storage
- Made in Germany




| Article Code | Size (mm) | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|-----------|-------------------|---------------------|----------------------|---|
| ST61311SC | 2.5 | 75.0 | 163.0 | 25.0 | 6 |
| ST61312SC | 3.0 | 100.0 | 188.0 | 25.0 | 6 |
| ST61313SC | 4.0 | 100.0 | 208.0 | 25.0 | 6 |
| ST61314SC | 5.5 | 125.0 | 233.0 | 34.0 | 6 |
| ST61315SC | 6.5 | 150.0 | 258.0 | 34.0 | 6 |

G-Series VDE Insulated Screwdrivers - Phillips







- · Blade is made of high performance alloy steel for maximum strength and durability
- High-impact, contoured handle presents an ergonomic and strong grip
- Sleek handle design for maximum power, user comfort, and greater access
- · Oil and solvent resistant handle provides a longer tool life
- Handle designed with "through hole" for easy storage
- Made in Germany



| Article Code | Size | Shank Length (mm) | Overall Length (mm) | Handle Diameter (mm) | |
|--------------|------|-------------------|---------------------|----------------------|---|
| ST61211SC | #0 | 60.0 | 148.0 | 25.0 | 6 |
| ST61212SC | #1 | 80.0 | 188.0 | 25.0 | 6 |
| ST61213SC | #2 | 100.0 | 208.0 | 34.0 | 6 |
| ST61214SC | #3 | 150.0 | 270.0 | 37.0 | 6 |

6-in-1 Interchangeable Screwdriver Set

| Article Code | Content | |
|--------------|--|---|
| ST09347 | 1- Screwdriver handle (5/16" and 1/4" double ended shank) 2-75 mm double ended bits 5/16" - 6.0 mmx#2 (Slotted / Phillips) 1/4" - 5.0 mmx#1 (Slotted / Phillips) | 6 |

8 Pc. Impact Screwdriver Set

| Article Code | Content | |
|--------------|---|----|
| ST09602SJ | 1 - Impact Screwdriver 1 - 1/2" Drive Bit Adapter 4 - 5/16" Shank 30L Bits Slotted 8.0, 10.0 mm; Phillips #2, #3 2 - 5/16" Shank 70L Bits Slotted 8.0 mm; Phillips #2 | 12 |



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.





8 Pc. Impact Screwdriver Set

Article Code Content ST09603SJ 1 - Protective Grip Impact Screwdriver 12 1 - 1/2" Drive Bit Adapter 4 - 5/16" Shank 30L Bits Slotted 8.0, 10.0 mm; Phillips #2, #3 2 - 5/16" Shank 70L Bits Slotted 8.0 mm; Phillips #2



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.



24 Pc. Ratcheting T-Handle **Screwdriver Set**

| Article Code | Content | |
|--------------|--|---|
| ST09341SJ | 1- T-Handle Ratcheting Screwdriver 1- 1/4" x1/4" Dr. Extension Bar 6" 1- 1/4" x1/4" Dr. Flex Extension Bar 6" 1- 1/4" Dr. Bit Adapter 20- Bits Phillips #0, #1, #2, #3 Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 8 |



Please refer to the warranty terms of the individual product



25 Pc. Ratcheting Stubby Screwdriver Set

26 Pc. Ratcheting Screwdriver Set

| Article Code | Content | |
|--------------|--|---|
| ST09342SJ | 1 - Stubby Ratcheting Screwdriver 1 - Magnetic Bit Holder 3-1/2" 1 - 1/4" x1/4" Dr. Extension Bar 3-1/2" 1 - 1/4" x1/4" Dr. Flex Extension Bar 6" 1 - 1/4" Dr. Bit Adapter 20 - Bits Phillips #0, #1, #2, #3, Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 8 |

| Article Code | Content | |
|--------------|--|---|
| ST09343SJ | 1 - Standard Ratcheting Screwdriver 3 - 1/4" x 1/4" Dr. Extension Bars 3-1/2", 6", 10" 1 - 1/4" x 1/4" Dr. Flex Extension 6" 1 - 1/4" Dr. Bit Adapter 20 - Bits Phillips #0, #1, #2, #3, Slotted 3, 4, 5, 5.5, 6.5, 8 mm, T10, T15, T20, T25, Hex 2.5, 3, 4, 5, 6, 7 mm | 6 |



Please refer to the warranty terms of the individual product



Please refer to the warranty terms of the individual product





6 Pc. Stubby Ratcheting Screwdriver Set

19-in-1 Multipurpose Ratcheting Screwdriver Set



| Article Code | Content | |
|--------------|---|----|
| ST09350 | 1 - Ratcheting Screwdriver 8 - Double-sided Bits Phillips #1, #2, #3 Slotted 5.0, 6.0, 8.0 mm Torx® T15, T20, T25, T20 Hex 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 mm | 10 |





ST09324SI ST09326SJ

60 PC. & 80 PC. RATCHETING BIT DRIVER SET



Designed with ratcheting function



Magnetic bit holder



Shank is made of Forward and high performance reversible alloy steel



locking position



Ergonomic dual material



Comes with a durable blow mold case





60 Pc. 1/4" Drive 6 Point Metric Socket and Ratcheting Bit Driver Set

| Article Code | Content | 6 |
|--------------|---|---|
| ST09324SJ | 1- Ratcheting Bit Driver 14- 6pt. Metric Sockets 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 mm 28- 25L Bits Phillips #0, #1, #2, #3 Slotted 3, 4, 5.5, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6 mm Torx® T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T10, T15, T20, T25, T27, T30, T40 12- 50L Bits Phillips #1, #2, #3 Slotted 4, 5.5, 6.5 mm Hex 4, 5, 6 mm Torx® T15, T20, T25 5- Accessories 25L Socket Bit Adapter Magnetic Bit Holder 60 mm Flex Extension Bar 6" Bit Adapter | 6 |



80 Pc. Ratcheting Bit Driver Set

| Article Code | Content | |
|--------------|--|----|
| ST09326SJ | 1 - Ratcheting Bit Driver 33 - 25L Bits Phillips #0, #1, #2(2x), #3 Slotted 3, 4, 5, 5.5, 6, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6 mm Torx® T8, T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T8, T10, T15, T20, T25, T27, T30, T40 32 - 50L Bits Phillips #0, #1, #2, #3 Slotted 3, 4, 5, 5.5, 6, 6.5 mm Hex 2, 2.5, 3, 4, 5, 6 mm Torx® T8, T10, T15, T20, T25, T27, T30, T40 Tamper-Proof Torx® T8, T10, T15, T20, T25, T27, T30, T40 8 - 65L Double End Bits PH1-PH1, PH2-PH2, PH3-PH3, 4.5 mm-PH1, 5.5 mm-PH2, 6.5 mm-PH3, PH1-PH2, PH2-PH3 3 - 110L Double End Bits PH1-PH1, PH2-PH2, PH3-PH3 3 - Accessories 25 L Socket Bit Adapter 50 L Socket Bit Adapter Magnetic Bit Holder 60 mm | 12 |



6 Pc. Mini Screwdriver Set

| Article Code | Content | |
|--------------|--|----|
| ST03141ST | 3 - Phillips #00, #0, #1 3 - Slotted 1.6 mm, 2.0 mm, 2.4 mm | 10 |

6 Pc. Mini Screwdriver Set

| Article Code | Content | 6 |
|--------------|--|----|
| ST03142 | 2 - Phillips #00, #0 4 - Torx® T5, T6, T7, T8 | 10 |





6 Pc. Precision Slotted **Screwdriver Set**

| Article Code | Content | |
|--------------|--|---|
| ST09311SJ | 6 - Slotted 1.0 x 40 mm, 1.4 x 50 mm, 2.0 x 50 mm, 2.4 x 50 mm, 3.0 x 50 mm, 3.5 x 50 mm | 6 |

6 Pc. Precision Combination **Screwdriver Set**

| Article Code | Content | |
|--------------|---|---|
| ST09312SJ | 2 - Phillips #0x50 mm, #00x50 mm 4 - Slotted 14x50 mm, 2.0x50 mm, 24x50 mm, 3.0x50 mm | 6 |





7 Pc. Precision Combination Screwdriver Set

| Article Code | Content | |
|--------------|--|---|
| ST09314SJ | 3 - Phillips #000 x 40 mm, #00 x 50 mm, #0 x 50 mm 4 - Slotted 14 x 50 mm, 2.0 x 50 mm, 24 x 50 mm, 3.0 x 50 mm | 6 |

9 Pc. Precision Combination Screwdriver Set

| Ar | ticle Code | Content | |
|----|------------|--|---|
| ST | T09316SJ | 4 - Phillips #000x40 mm, #00x75 mm, #0x75 mm, #1x100 mm 5 - Slotted 1.0x40 mm, 2.0x50 mm, 24x75 mm, 3.0x75 mm, 4.0x100 mm | 6 |





15 Pc. Precision Combination Screwdriver Set

| Article Code | Content | |
|--------------|---|---|
| ST09317SJ | 3 - Phillips #000x40 mm, #00x50 mm, #0x50 mm 4 - Slotted 1.0x40 mm, 2.0x50 mm, 3.0x50 mm, 3.5x50 mm 4 - Torx® T6x50 mm, T8x50 mm, T10x50 mm, T15x50 mm 4 - Hex 1.5x50 mm, 2.0x50 mm, 2.5x50 mm, 3.0x50 mm | 6 |

6 Pc. Precision Torx® Screwdriver Set

| Article Code | Content | |
|--------------|---|---|
| ST09313SJ | 6 - Torx® T6x50 mm, T7x50 mm, T8x50 mm, T9x50 mm ,T10x50 mm, T15x50 mm | 6 |





7 Pc. Precision Torx® Screwdriver Set 31 Pc. 1/4" Drive Bit Set

| Article Code | Content | |
|--------------|--|---|
| ST09315SJ | 7 - Torx® T5x50 mm, T6x50 mm, T7x50 mm, T8x50 mm, T9x50 mm, T10x50 mm, T15x50 mm | 6 |

| Article Code | Content | |
|--------------|--|---|
| ST09332SJ | 1 - Magnetic Bit Holder 30 - 1/4" Shank 25L Bits Slotted 4, 5, 6, 6.5 mm Phillips #0, #1, #2, #3 Hex 3, 4, 5, 6, 7, 8 mm Torx® T8, T10, T15, T20, T25, T30, T40 Tamper-Proof Torx® T10, T15, T20, T25, T30, T40 Pozidriv #1, #2, #3 | 6 |





31 Pc. 1/4" Drive Bit Set

| Article Code | Content | |
|--------------|---|---|
| ST09333SJ | 1 - Magnetic Quick-Change Bit Holder 30 - 1/4" Shank 25L Bits Slotted 4, 5.5, 6, 6.5 mm Phillips #0, #1, #2, #3 Hex 3, 4, 5, 6, 7, 8 mm Torx® T8, T10, T15, T20, T25, T30, T40 Tamper-Proof Torx® T10, T15, T20, T25, T30, T40 Pozidriv #1, #2, #3 | 6 |



Please refer to the warranty terms of the individual product



31 PC. 1/4" DRIVE BIT SET





Precison

engineered










Bits are made of high performance alloy steel

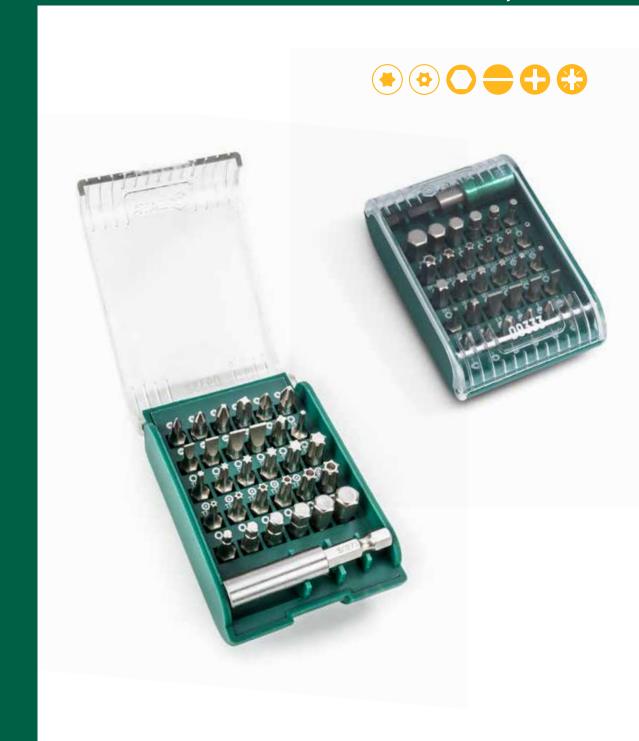

1/4" Drive Magnetic Bit Holder

- Magnetic, easy to operate
- Manufactured from S2 steel for maximum strength and durability
- 3 Pc. display packed





Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| ST59273ST | 1/4" | 60.0 | 12 |

1/4" Drive Magnetic Quick-Change Bit Holder

- Magnetic, easy to operate
- · One-hand operation for faster bit changes
- Manufactured from S2 steel for maximum strength and durability
- For use with impact drivers





Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|---|
| ST59274 | 1/4" | 64.0 | 6 |

1/4" Drive Socket Bit Adapter

- · Manufactured from S2 steel for maximum strength and durability
- 5 Pc. display packed



ST59271ST






| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| ST59271ST | 1/4" | 25.0 | 12 |
| ST59272ST | 1/4" | 50.0 | 12 |

1/4" Dr. 25L Bit Phillips

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600



Excluded from Lifetime Warranty terms



1/4" Dr. 25L Bit Pozidriv

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600







Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| SC59261 | #1 | 25.0 | 12 |
| SC59262 | #2 | 25.0 | 12 |
| SC59263 | #3 | 25.0 | 12 |

1/4" Drive 25L Bit Slotted

- · Precison engineered bits for a better fit on fasteners
- · Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B107.600







| Article Code | Size (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------|----|
| SC59211 | 3.0 | 25.0 | 12 |
| SC59213 | 4.0 | 25.0 | 12 |
| SC59215 | 5.0 | 25.0 | 12 |
| SC59216 | 5.5 | 25.0 | 12 |
| SC59217 | 6.0 | 25.0 | 12 |
| SC59218 | 6.5 | 25.0 | 12 |

1/4" Drive 25L Bit Torx®

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds Camcar TXF-702





Excluded from Lifetime Warranty terms

| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| SC59231 | Т8 | 25.0 | 12 |
| SC59232 | T10 | 25.0 | 12 |
| SC59233 | T15 | 25.0 | 12 |
| SC59234 | T20 | 25.0 | 12 |
| SC59235 | T25 | 25.0 | 12 |
| SC59236 | T27 | 25.0 | 12 |
| SC59237 | T30 | 25.0 | 12 |
| SC59238 | T40 | 25.0 | 12 |

1/4" Drive 25L Bit Hex

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M





| Article Code | Size (mm) | Overall Length (mm) | 6 |
|--------------|-----------|---------------------|----|
| SC59251 | 2.0 | 25.0 | 12 |
| SC59253 | 3.0 | 25.0 | 12 |
| SC59254 | 4.0 | 25.0 | 12 |
| SC59255 | 5.0 | 25.0 | 12 |
| SC59256 | 6.0 | 25.0 | 12 |
| SC59257 | 7.0 | 25.0 | 12 |
| SC59258 | 8.0 | 25.0 | 12 |

5/16" Drive 30L Bit Slotted

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M



Excluded from Lifetime Warranty terms



| Article Code | Size (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------|----|
| SC59415 | 8.0 | 30.0 | 12 |
| SC59416 | 10.0 | 30.0 | 12 |
| SC59417 | 12.0 | 30.0 | 12 |

5/16" Drive 30L Bit Philips

- Precison engineered bits for a better fit on fasteners
- Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M



Excluded from Lifetime Warranty terms






| Article Code | Size | Overall Length (mm) | |
|--------------|------|---------------------|----|
| SC59421 | #1 | 30.0 | 12 |
| SC59422 | #2 | 30.0 | 12 |
| SC59423 | #3 | 30.0 | 12 |
| SC59424 | #4 | 30.0 | 12 |

5/16" Drive 30L Bit Hex

- Precison engineered bits for a better fit on fasteners
- · Heat treated for long lasting durability
- S2 steel insert bits offer maximum strength and durability
- 5 Pc. display packed
- Meets or exceeds ASME B18.3.2M



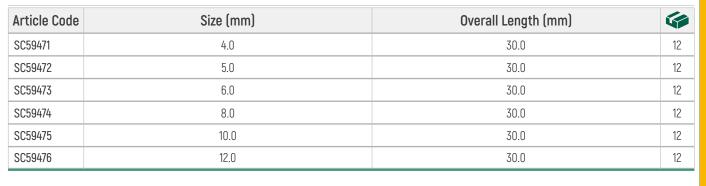








9 Pc. Metric Extra Long Ball Point Hex Key and Torque Handle Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09124SJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |



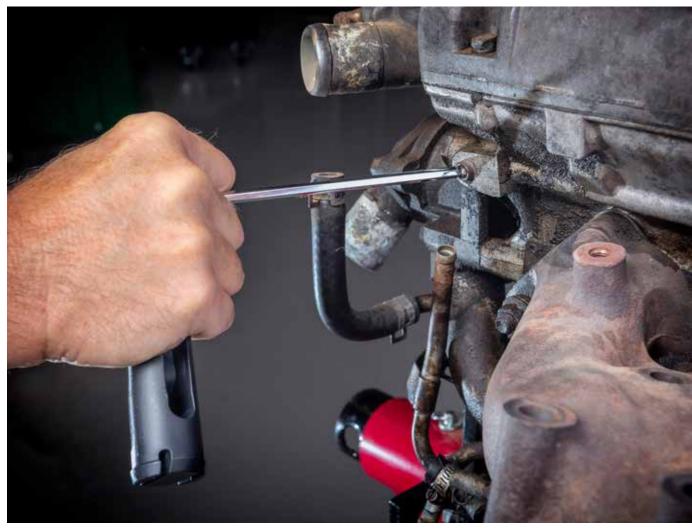

ST09124SJ

9 PC. METRIC EXTRA LONG BALL POINT HEX KEY AND TORQUE HANDLE SET




Up to 30% longer



Angled access to fasteners



Precise fit



Easy to read size markings



High-torque handle



Impact resistant caddy

METRIC





9 Pc. Metric Extra Long Ball Point **Hex Key Set**

Article Code Content ST09101ASJ 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm

12 Pc. SAE Extra Long Ball Point **Hex Key Set**

| Article Code | Content | |
|--------------|--|---|
| ST09102SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |





Extra Long Ball Point Hex Key

- Up to 30% longer for improved access and leverage
- Ball point keys allow for angled access to fasteners
- · Precise fit for a solid grip and chamfered tips for faster insertion

5.0

6.0

8.0

10.0

Easy to read size markings

SC80110A

SC80112A

SC80114A

SC80116A



159.0

179.0

199.0

223.0

27.0

31.0

35.0

39.0

9 Pc. Metric Extra Long Hex Key Set 12 Pc. SAE Extra Long Hex Key Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09103ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

| Article Code | Content | |
|--------------|--|---|
| ST09104SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |





Extra Long Hex Key

- Up to 30% longer for improved access and leverage
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC80304 | 1.5 | 89.0 | 13.0 | 72 |
| SC80305 | 2.0 | 99.0 | 13.5 | 72 |
| SC80306 | 2.5 | 111.0 | 17.0 | 72 |
| SC80307 | 3.0 | 125.0 | 19.0 | 36 |
| SC80308 | 4.0 | 139.0 | 24.0 | 36 |
| SC80310 | 5.0 | 159.0 | 27.0 | 36 |
| SC80312 | 6.0 | 179.0 | 31.0 | 36 |
| SC80314 | 8.0 | 199.0 | 35.0 | 18 |
| SC80316 | 10.0 | 223.0 | 39.0 | 18 |

9 Pc. Metric Long Ball Point Hex Key Set

12 Pc. SAE Long Ball Point Hex Key Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09105ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

| Article Code | Content | |
|--------------|--|---|
| ST09106SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |





Long Ball Point Hex Key

- Ball point keys allow for angled access to fasteners
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC81104 | 1.5 | 77.0 | 13.5 | 72 |
| SC81105 | 2.0 | 82.0 | 15.5 | 72 |
| SC81106A | 2.5 | 88.5 | 17.5 | 72 |
| SC81107A | 3.0 | 98.5 | 19.0 | 36 |
| SC81108 | 4.0 | 104.0 | 24.0 | 36 |
| SC81110A | 5.0 | 116.0 | 27.0 | 36 |
| SC81111 | 5.5 | 126.5 | 29.0 | 36 |
| SC81112A | 6.0 | 138.0 | 31.0 | 36 |
| SC81113A | 7.0 | 148.0 | 33.0 | 36 |
| SC81114A | 8.0 | 175.5 | 35.0 | 18 |
| SC81116A | 10.0 | 167.0 | 39.0 | 18 |

9 Pc. Metric Long Hex Key Set

12 Pc. SAE Long Hex Key Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09107ASJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

| Article Code | Content | |
|--------------|--|---|
| ST09108SJ | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16, 3/8" | 6 |





Long Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| SC81304 | 1.5 | 77.0 | 13.5 | 72 |
| SC81305 | 2.0 | 82.0 | 15.5 | 72 |
| SC81306 | 2.5 | 88.5 | 17.5 | 72 |
| SC81307 | 3.0 | 98.5 | 19.0 | 36 |
| SC81308A | 4.0 | 104.0 | 24.0 | 36 |
| SC81310 | 5.0 | 116.0 | 27.0 | 36 |
| SC81312 | 6.0 | 138.0 | 31.0 | 36 |
| SC81314 | 8.0 | 157.5 | 35.0 | 18 |
| SC81316 | 10.0 | 167.0 | 39.0 | 18 |

8 Pc. Metric Hex Key Fold-Up Set

9 Pc. SAE Hex Key Fold-Up Set

8 Pc. Torx® Key Fold-Up Set

| Article Code | Content | |
|--------------|----------------------------------|----|
| ST09121SJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm | 12 |

| Article Code | Content | 4 |
|--------------|---|----|
| ST09122SJ | 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4" | 12 |

| Article Code | Content | |
|--------------|---------------------------------------|----|
| ST09123SJ | T9, T10, T15, T20, T25, T27, T30, T40 | 12 |







T-Handle Ball Point Hex Key

- Ball point keys allow for angled access to fasteners
- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Ergonomic non-slip grip delivers superior strength and ultimate comfort in use
- Key made of shock resisted steel (SVCM+) material to provide 30% more torque than Chrome vanadium alloy steel (Cr-V)
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Handle Length (mm) | Overall Length (mm) | |
|--------------|-----------|--------------------|---------------------|---|
| ST83105SC | 2.0 | 61.5 | 129.0 | 6 |
| ST83106SC | 2.5 | 61.5 | 129.0 | 6 |
| ST83107SC | 3.0 | 61.0 | 128.5 | 6 |
| ST83108SC | 4.0 | 60.5 | 178.0 | 6 |
| ST83110SC | 5.0 | 64.0 | 178.0 | 6 |
| ST83112SC | 6.0 | 88.0 | 192.0 | 6 |
| ST83113SC | 7.0 | 87.5 | 241.5 | 6 |
| ST83114SC | 8.0 | 87.5 | 241.5 | 6 |
| ST83116SC | 10.0 | 91.0 | 241.5 | 6 |

T-Handle Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Ergonomic non-slip grip delivers superior strength and ultimate comfort in use
- Key made of shock resisted steel (SVCM+) material to provide 30% more torque than Chrome vanadium alloy steel (Cr-V)
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Handle Length (mm) | Overall Length (mm) | |
|--------------|-----------|--------------------|---------------------|---|
| ST83305SC | 2.0 | 61.5 | 129.0 | 6 |
| ST83306SC | 2.5 | 61.5 | 129.0 | 6 |
| ST83307SC | 3.0 | 61.5 | 129.0 | 6 |
| ST83308SC | 4.0 | 60.5 | 178.0 | 6 |
| ST83310SC | 5.0 | 64.0 | 178.0 | 6 |
| ST83312SC | 6.0 | 88.0 | 192.0 | 6 |
| ST83313SC | 7.0 | 87.5 | 241.5 | 6 |
| ST83314SC | 8.0 | 87.5 | 241.5 | 6 |
| ST83316SC | 10.0 | 91.0 | 241.5 | 6 |

9 Pc. Ball Point Color Series Black Oxide Hex Key Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09101CHBSJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

9 Pc. Extra Long Color Series Black Oxide Hex Key Set

| Article Code | Content | |
|--------------|-----------------------------------|---|
| ST09107CHBSJ | 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |





ST09101CHBSJ ST09107CHBSJ

9 PC. BALL POINT & EXTRA LONG COLOR SERIES BLACK OXIDE HEX KEY SET







Angled access to fasteners



Precise fit



Up to 30% longer



Black oxide finish



Impact resistant caddy





Metric/SAE Black Oxide Hex Key Set

8 Pc. Tamper-Proof Torx® Key Set

| Article Code | Content | |
|--------------|--|---|
| ST09120SJ | 13 - Long Hex Keys 0.05, 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16", 3/8" 12 - Short Hex Keys 0.7, 0.9, 1.3, 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm | 6 |

| Article Code | Content | |
|--------------|------------------------------------|----|
| ST09701 | T6, T7, T8, T9, T10, T15, T20, T25 | 12 |





Black Oxide Hex Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Black oxide finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B18.3.2M



| Article Code | Size (mm) | Long End Length (mm) | Short End Length (mm) | |
|--------------|-----------|----------------------|-----------------------|----|
| ST84318SC | 12.0 | 209.0 | 44.0 | 10 |
| ST84320SC | 14.0 | 232.5 | 54.5 | 10 |
| SC84321 | 16.0 | 239.5 | 58.5 | 12 |
| ST84323SC | 17.0 | 261.0 | 64.5 | 10 |
| SC84322 | 18.0 | 246.0 | 61.5 | 12 |
| ST84325SC | 19.0 | 275.5 | 68.5 | 10 |
| ST84328 | 22.0 | 330.0 | 78.0 | 10 |
| SC84324 | 24.0 | 369.5 | 88.0 | 10 |
| SC84329 | 27.0 | 410.0 | 97.5 | 6 |

9 Pc. Tamper-Proof Torx® Key Set

Article Code Content ST09702 T10, T15, T20, T25, T27, T30, T40, T45, T50 6

9 Pc. Long Ball Point Tamper-Proof Torx® Key Set

| Article Code | Content | |
|--------------|---|---|
| ST09715 | T10, T15, T20, T25, T27, T30, T40, T45, T50 | 6 |






Tamper-Proof Torx® Key

- Precise fit for a solid grip and chamfered tips for faster insertion
- Easy to read size markings
- Chrome plated finish to resist corrosion
- Manufactured from S2 steel for maximum strength and durability
- Meets or exceeds Camcar TXF-703



| Article Code | Size | Long End Length (mm) | Short End Length (mm) | |
|--------------|------|----------------------|-----------------------|----|
| SC84501 | T6 | 70.0 | 13.0 | 72 |
| SC84502 | 17 | 74.0 | 14.0 | 72 |
| SC84503 | Т8 | 78.0 | 15.0 | 72 |
| SC84504 | T9 | 82.0 | 16.0 | 72 |
| SC84505 | T10 | 86.0 | 17.0 | 72 |
| SC84506 | T15 | 90.0 | 18.0 | 72 |
| SC84507 | T20 | 95.0 | 19.0 | 72 |
| SC84508 | T25 | 100.0 | 20.0 | 72 |
| SC84509 | T27 | 105.0 | 21.0 | 72 |
| SC84510 | T30 | 114.0 | 24.0 | 72 |
| SC84511 | T40 | 124.0 | 26.0 | 72 |
| SC84512 | T45 | 133.0 | 29.0 | 36 |
| SC84513 | T50 | 152.0 | 32.0 | 36 |
| SC84514 | T55 | 162.0 | 34.0 | 36 |

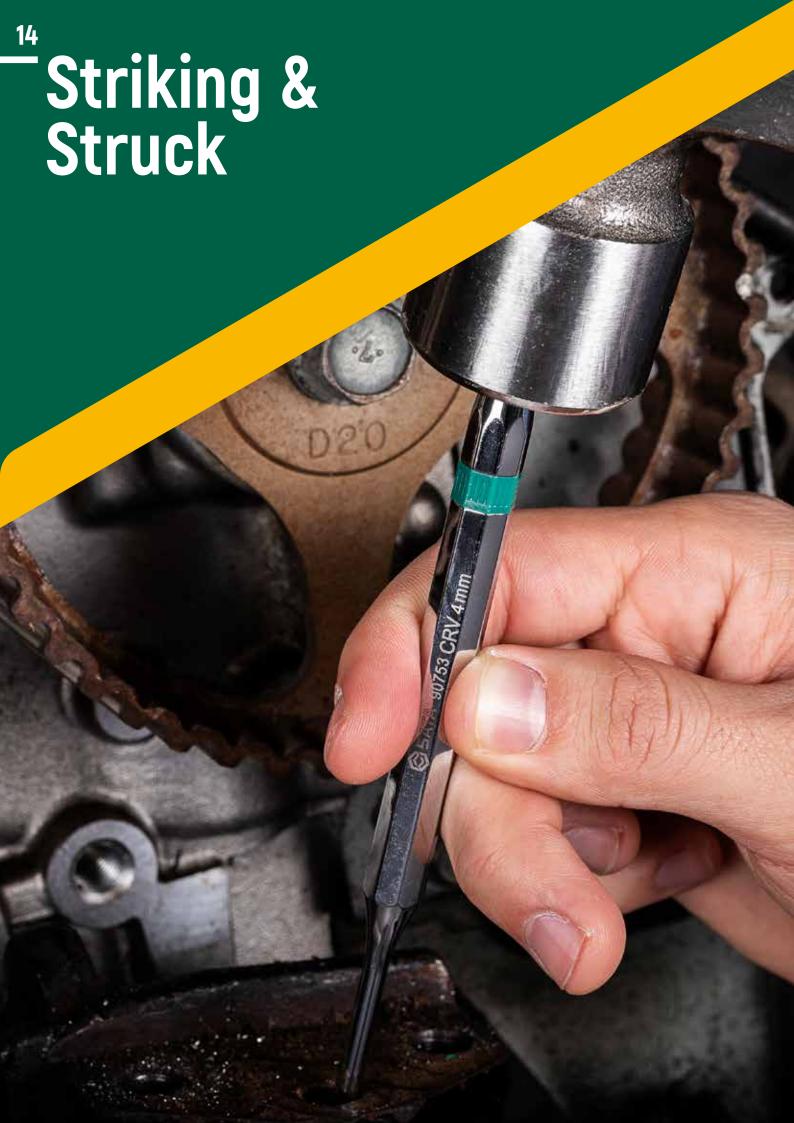

5 Pc. Punch Set

| Article Code | Content | |
|--------------|--|----|
| ST09161SJ | 1 - Center Punch 4 mm 1 - Drift Punch 3 mm 1 - Pin Punch 4 mm 1 - Cape Chisel 5 mm 1 - Flat Chisel 12 mm | 20 |

6 Pc. Pin Punch Set

| Article Code | Content | |
|--------------|----------------------|---|
| ST09162SJ | 2 , 3, 4, 5, 6, 8 mm | 6 |
| | | |
| | | |





3 Pc. Chisel Set

| Article Code | Content | |
|--------------|---------------|---|
| ST09163SJ | 20, 22, 25 mm | 4 |
| | | |
| | | |

13 Pc. Punch and Chisel Set

| Article Code | Content | |
|--------------|---|---|
| ST09164SJ | 2 - Center Punches 4, 5 mm 1 - Drift Punch 3 mm 6 - Pin Punches 2, 3, 4, 5, 6, 8 mm 1 - Cape Chisel 5 mm 3 - Flat Chisels 12, 15, 18 mm | 4 |





Center Punch

- Single piece forged steel for maximum strength
- Chrome plated finish to resist corrosion
- Heat treated for long lasting durability
- Bright, full polish chrome finish easily wipes clean
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410



| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90751 | 4.0 | 8.0 | 120.0 | 10 |
| ST90762SC | 5.0 | 10.0 | 150.0 | 10 |

Pin Punch

- Single piece forged steel for maximum strength
- Chrome plated finish to resist corrosion
- Heat treated for long lasting durability
- · Bright, full polish chrome finish easily wipes clean
- · Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410



| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90771 | 2.0 | 8.0 | 150.0 | 10 |
| ST90772SC | 3.0 | 8.0 | 150.0 | 10 |
| SC90753 | 4.0 | 8.0 | 150.0 | 10 |
| SC90774 | 5.0 | 8.0 | 150.0 | 10 |
| SC90775 | 6.0 | 10.0 | 150.0 | 10 |
| SC90776 | 8.0 | 10.0 | 150.0 | 10 |

Cold Chisel

- Single piece forged steel for maximum strength
- Chrome plated finish (SC90782 & SC90783) and powder coating (SC90784, SC90785 & SC 90786) to resist corrosion
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability
- Meets or exceeds ASME B107.410





| Article Code | Size (mm) | Tapping Surface Outside Diameter (mm) | Overall Length (mm) | |
|--------------|-----------|---------------------------------------|---------------------|----|
| SC90782 | 15.0 | 10.0 | 150.0 | 10 |
| SC90783 | 18.0 | 12.0 | 175.0 | 10 |
| SC90784 | 20.0 | 14.0 | 200.0 | 6 |
| SC90785 | 22.0 | 18.0 | 250.0 | 6 |
| ST90786SC | 25.0 | 20.0 | 300.0 | 4 |

Hammers

- Durable hickory handle provides comfortable grip
- Unique embedding process to prevent hammer head from easily falling off
- Forging hammer head with quenching treatment to prevent easy broken
- Meets or exceeds ASME B107.410

Standard Bumping Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92101SC | 320.0 | 97.0 | 330.0 | 6 |

Heavy Shrinking Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92102SC | 390.0 | 97.0 | 330.0 | 6 |

Light Shrinking Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92104SC | 320.0 | 97.0 | 330.0 | 6 |

Curved Pein and Finishing Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92103SC | 305.0 | 140.0 | 330.0 | 6 |

Straight Pein and Finishing Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | 4 |
|--------------|--------------------|---------------------|------------------------|---|
| ST92105SC | 305.0 | 140.0 | 330.0 | 6 |

Pick and Finishing Hammer



| Article Code | Head Weight (g) | Head Length (mm) | Overall Length (mm) | |
|--------------|--------------------|---------------------|------------------------|---|
| ST92106SC | 260.0 | 137.0 | 330.0 | 6 |

Hickory Ball Pein Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92312SC | 454.0 | 16.0 | 350.0 | 6 |
| ST92313SC | 680.0 | 24.0 | 360.0 | 4 |
| ST92314SC | 910.0 | 32.0 | 390.0 | 6 |
| ST92315 | 1134.0 | 40.0 | 400.0 | 4 |

Fiberglass Ball Pein Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Unique embedded construction securely attaches the head to the handle
- Fiberglass handle absorbs vibration of each strike for comfortable use
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92301 | 227.0 | 8.0 | 297.0 | 4 |
| ST92302SC | 454.0 | 16.0 | 343.0 | 2 |
| ST92303SC | 680.0 | 24.0 | 349.0 | 2 |
| ST92304SC | 910.0 | 32.0 | 351.0 | 2 |
| ST92305 | 1134.0 | 40.0 | 380.0 | 2 |

Hickory Claw Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Hammer head with polished poles and peins
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- · Rip claws designed for efficient prying and nail pulling
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92322SC | 370.0 | 13.0 | 308.0 | 6 |
| ST92323SC | 454.0 | 16.0 | 330.0 | 6 |
| ST92324SC | 567.0 | 20.0 | 330.0 | 6 |

Fiberglass Claw Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Balanced head for maximum striking power and control
- Hammer head with polished poles and peins
- Fiberglass handle absorbs vibration of each strike for comfortable use
- Unique embedded construction securely attaches the head to the handle
- Rip claws designed for efficient prying and nail pulling
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92308 | 227.0 | 8.0 | 280.0 | 4 |
| ST92306SC | 454.0 | 16.0 | 330.0 | 2 |
| ST92307SC | 680.0 | 24.0 | 380.0 | 2 |

Hickory Engineers Hammer

- Maximum-strength head and claw forged of carbon steel, finished with a corrosion and rust resistant clear coat
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92401SC | 200.0 | 7.0 | 285.0 | 4 |
| ST92402SC | 300.0 | 10.6 | 300.0 | 4 |
| ST92403SC | 400.0 | 14.1 | 320.0 | 4 |
| ST92404SC | 500.0 | 17.6 | 320.0 | 2 |
| ST92405SC | 800.0 | 28.2 | 350.0 | 2 |
| ST92406SC | 1000.0 | 35.5 | 360.0 | 2 |

Hickory Soft Face Hammer

- Non-sparking, non-marring soft face won't harm your target surface
- Aluminum center piece for better balance and lighter weight
- Balanced head for maximum striking power and control
- Hickory handle is flame treated, clear lacquered, and securely wedged into the hammer's head
- Durable hickory handle provides comfortable grip
- Meets or exceeds ASME B107.410





Plastic hammer head is not covered under Lifetime Warranty.

| Article Code | Head Weight (g) | Head Weight (oz) | Head Diameter (mm) | Overall Length (mm) | 6 |
|--------------|-----------------|------------------|--------------------|---------------------|---|
| ST92501 | 160.0 | 5.6 | 22.0 | 260.0 | 6 |
| ST92502SC | 162.0 | 5.7 | 28.0 | 303.0 | 6 |
| ST92503SC | 308.0 | 10.9 | 35.0 | 320.0 | 6 |
| ST92504SC | 454.0 | 16.0 | 45.0 | 320.0 | 6 |
| ST92505 | 778.0 | 27.4 | 60.0 | 385.0 | 4 |

Soft Face Hammer Tip

- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Hammer head hardness match material surface hardness can avoid surface abrasion and dents
- It will not be deformed, broken or leave any remnants
- Suitable for installing work without damaging the object surface
- Meets or exceeds ASME B107.410





This product is consumable, not within SATA Lifetime Warranty.

| Article Code | Diameter (mm) | |
|--------------|---------------|---|
| ST92521SC | 22.0 | 6 |
| ST92522SC | 28.0 | 6 |
| ST92523SC | 35.0 | 6 |
| ST92524SC | 45.0 | 6 |
| ST92525SC | 60.0 | 6 |

Hard Face Hammer Tip

- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Hammer head hardness match material surface hardness can avoid surface abrasion and dents
- It will not be deformed, broken or leave any remnants
- Suitable for installing work without damaging the object surface
- Meets or exceeds ASME B107.410





This product is consumable, not within SATA Lifetime Warranty.

| Article Code | Diameter (mm) | |
|--------------|---------------|---|
| ST92531SC | 22.0 | 6 |
| ST92532SC | 28.0 | 6 |
| ST92533SC | 35.0 | 6 |
| ST92534SC | 45.0 | 6 |
| ST92535SC | 60.0 | 6 |

Dead Blow Hammer

- Canister filled with steel shot in the hammer's head creates a dead blow effect to reduce rebound
- Non-sparking, non-marring soft face won't harm your target surface
- Resistant to gas, brake fluid, anti-freeze and more, with a polyurethane head and rubber handle
- Rubber handle has a knurled texture and flared back end for improved non-slip grip
- Ideal for professional environments where fire prevention is a priority or concern
- Meets or exceeds ASME B107.410



| Article Code | Head Weight (g) | Head Weight (oz) | Head Diameter (mm) | Overall Length (mm) | |
|--------------|-----------------|------------------|--------------------|---------------------|---|
| ST92901SC | 400.0 | 14.1 | 35.0 | 260.0 | 6 |
| ST92902SC | 520.0 | 18.3 | 45.0 | 286.0 | 6 |
| ST92903SC | 1050.0 | 37.0 | 55.0 | 350.0 | 4 |
| ST92904SC | 1500.0 | 52.9 | 65.0 | 370.0 | 4 |

Rubber Mallet Hammer


- Ideal for various applications and use on a variety of surfaces and materials without marring and surface damage
- Meets or exceeds ASME B107.410





| Article Code | Head Weight (g) | Head Weight (oz) | Overall Length (mm) | |
|--------------|-----------------|------------------|---------------------|---|
| ST92912ME | 454.0 | 16.0 | 330.0 | 6 |
| ST92913ME | 567.0 | 20.0 | 331.0 | 6 |



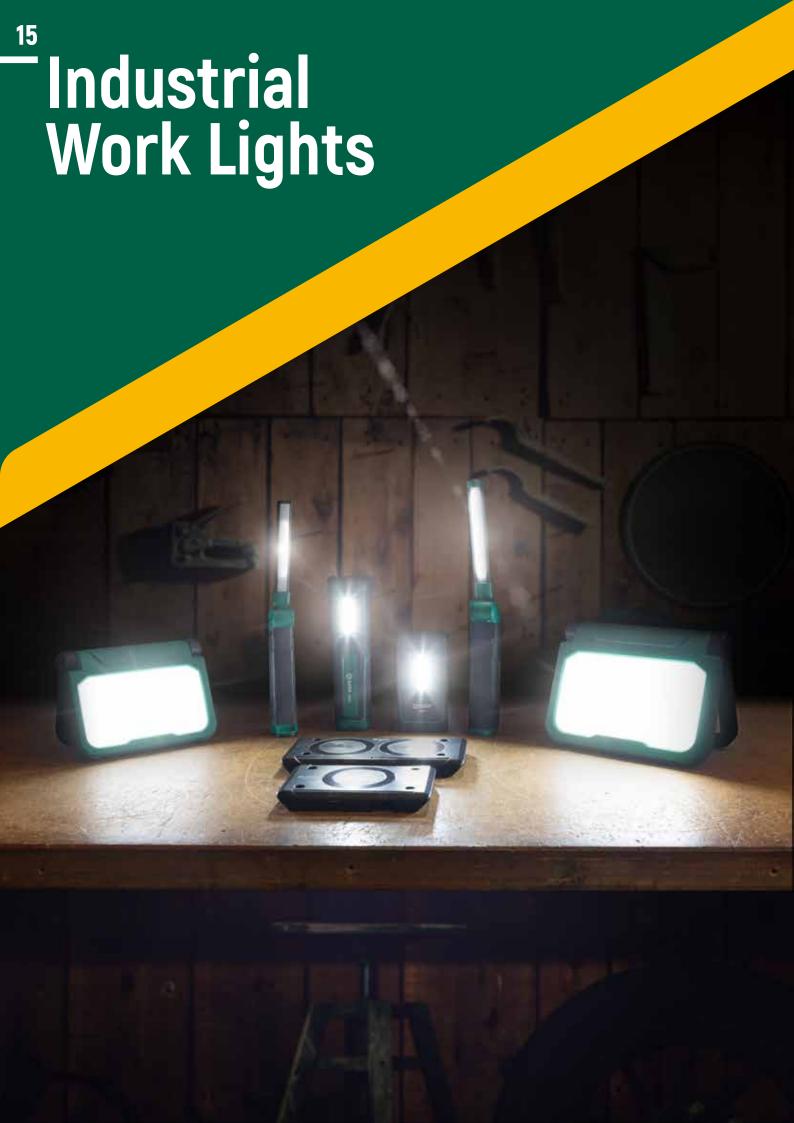

ST90606 ST90607

INDUSTRIAL WIRELESS RECHARGEABLE WORK LIGHT



Top light included



360° swivel hook



Lamp stand folds and sets to different angles



IP65 dust and water-proof design



Magnet in base and back



Wireless or USB rechargeable























Industrial Wireless Rechargeable Work Light

- Dual LED 300 (front) and 100 (top) lumen ratings for high intensity illumination
- Wireless or USB rechargeable lithium ion battery
- IP65 dust and water-proof design convenient for outdoor use
- Pocket-sized, lightweight design is easy to carry and store
- Adjustable lamp stand folds and sets to different angles
- Efficient LED strip made with COB technology for a wide range of applications
- Magnet in base and back for easy positioning and hand free use
- 360° swivel hook for easy positioning and hands free use
- Battery level indicated by LED display
- Lithium ion battery provides up to 6 hours of run time



Not covered under Lifetime Warranty.



Industrial Wireless Charger not included.

| Article Code | Front Light | Top Light | Charging Time | Operating Time | Input |
|--------------|-------------|-----------|--|---------------------------------|----------|
| ST90606 | 300 lm | 100 lm | approx. 2.5 h (cable) / 3.5 h (wireless) | approx. 3 h (front) / 6 h (top) | 5 V, 1 A |

| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|----------------------------|---------------------------|-------------------|--------------------|------------|--|
| 3 W (front) / 1 W (top) | Li-ion 3.7 V; 1500 mAh | IP65 | 133 x 68 x 25 mm | 200 g | Work Light; Charging Cable USB Type C |







Industrial Wireless Rechargeable Work Light

- Dual LED 600 (front) and 100 (top) lumen ratings for high intensity illumination
- Wireless or USB rechargeable lithium ion battery
- IP65 dust and water-proof design convenient for outdoor use
- Impact resistant case is lightweight and durable
- Adjustable lamp stand folds and sets to different angles
- Efficient LED strip made with COB technology for a wide range of applications
- Magnet in base and back for easy positioning and hand free use
- 360° swivel hook for easy positioning and hands free use
- Battery level indicated by LED display
- Lithium ion battery provides up to 10 hours of run time





Industrial Wireless Charger not included.

| Article Code | Front Light | Top Light | Charging Time | Operating Time | Input |
|--------------|-------------|-----------|--|----------------------------------|----------|
| ST90607 | 600 lm | 100 lm | approx. 2.5 h (cable) / 4.5 h (wireless) | approx. 3 h (front) / 10 h (top) | 5 V, 2 A |

| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|----------------------------|---------------------------|-------------------|--------------------|------------|--|
| 6 W (front) / 1 W (top) | Li-ion 3.7 V; 2600 mAh | IP65 | 205 x 55 x 40 mm | 302 g | Work Light; Charging Cable USB Type C |

ST90608 ST90620

INDUSTRIAL FOLDABLE **SLIM WORK LIGHT**




Top light included



360° swivel hook



Efficient LED COB technology lamp head



Ultra-thin strip made with aluminum alloy



Magnet in base and back



Lithium ion battery















Industrial Wireless Rechargeable and Foldable Slim Work Light

- Dual LED 600 (front) and 100 (top) lumen ratings for high intensity illumination
- Wireless or USB rechargeable lithium ion battery
- Ultra-thin aluminum alloy lamp head designed for small spaces
- Light pivots 180° and rotates 270° to direct the beam where you need it
- Lightweight and durable design
- Efficient LED strip made with COB technology for a wide range of applications
- Magnet in base and back for easy positioning and hand free use
- 180° swivel hook for easy positioning and hands free use
- Battery level indicated by LED display
- Lithium ion battery provides up to 10 hours of run time



Not covered under Lifetime Warranty.



Industrial Wireless Charger not included



| | П | |
|----|---|--|
| | Ш | |
| d. | | |

| Article Code | Front Light | Top Light | Charging Time | Operating Time | Input |
|--------------|-------------|-----------|--|----------------------------------|----------|
| ST90608 | 600 lm | 100 lm | approx. 2.5 h (cable) / 4.5 h (wireless) | approx. 3 h (front) / 10 h (top) | 5 V, 2 A |

| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|----------------------------|---------------------------|-------------------|--------------------|------------|--|
| 6 W (front) / 1 W (top) | Li-ion 3.7 V; 2600 mAh | IP54 | 325 x 44 x 38 mm | 250 g | Work Light; Charging Cable USB Type C |








Industrial Foldable Slim Work Light

- Dual LED 400 (front) and 80 (top) lumen ratings for high intensity illumination
- Ultra-thin aluminum alloy lamp head designed for small spaces
- Light pivots 180° and rotates 180° to direct the beam where you need it
- IP20 dust and moisture proof design
- · Lightweight and durable design
- Efficient LED strip made with COB technology for a wide range of applications
- Magnet in base and back for easy positioning and hand free use
- 180° swivel hook for easy positioning and hands free use
- Lithium ion battery provides up to 8 hours of run time







| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|----------------------------|---------------------------|-------------------|--------------------|------------|---|
| 3 W (front) / 1 W (top) | Li-ion 3.7 V; 2000 mAh | IP20 | 300 x 44 x 34 mm | 200 g | Work Light; Charging Cable Micro USB |

















Industrial Water Proof Flood Light

- 1000 lumen rating for high intensity illumination
- IP65 dust and water-proof design convenient for outdoor use
- ABS plastic shell + TPR front cover to protect from falling and damage
- 270° pivot directs light where you need it
- USB rechargeable lithium ion battery
- Soft shade optical precision reduces glare discomfort without compromising brightness
- Built-in 4000 mAh lithium ion battery
- Two levels of light intensity settings at 50% and 100% brightness
- Battery level indicated by LED display
- · Lithium ion battery provides up to 5 hours of run time





Not covered under Lifetime Warranty.

| Article Code | Light | Charging Time | Operating Time | Input |
|--------------|-------------------------------|---------------|--------------------------------|--------------|
| ST90613 | 1000 lm (100%) / 500 lm (50%) | approx. 4.5 h | approx. 3 h (100%) / 5 h (50%) | 2.7 A (max.) |

| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|-------|---------------------------|-------------------|--------------------|------------|---|
| 10 W | Li-ion 3.7 V; 4000 mAh | IP65 | 173 x 133 x 43 mm | 400 g | Flood Light; Charging Cable USB Type C |







Industrial Water Proof Flood Light

- 2000 lumen rating for high intensity illumination
- IP65 dust and water-proof design convenient for outdoor use
- ABS plastic shell + TPR front cover to protect the product from falling and damage
- 270° pivot directs light where you need it
- USB rechargeable lithium ion battery
- Soft shade optical precision reduces glare discomfort without compromising brightness
- Built-in 8000 mAh lithium ion battery
- Two levels of light intensity settings at 50% and 100% brightness
- Battery level indicated by LED display
- Lithium ion battery provides up to 5 hours of run time





| Power | Battery | Protection Degree | Dimensions (LxWxH) | Net Weight | Content |
|-------|---------------------------|-------------------|--------------------|------------|--|
| 20 W | Li-ion 3.7 V; 8000 mAh | IP65 | 204 x 156 x 51 mm | 690 g | Work Light; Charging Cable USB Type C |



Industrial Single Output Wireless Charger

- Single output wireless charger
- Easy wireless charging with built-in, safe magnet connection
- Wireless charging function compatible with mobile phones
- USB output
- Suitable for ST90606, ST90607 and ST90608 Industrial Wireless Rechargeable Work Light



Not covered under Lifetime Warranty.

| Article Code | Power | Dimensions (LxWxH) | Net Weight | Input |
|--------------|-------|--------------------|------------|----------|
| ST90609 | 5 W | 151 x 106 x 18 mm | 190 g | 5 V, 2 A |

Industrial Double Output Wireless Charger

- Double output wireless charger
- Easy wireless charging with built-in, safe magnet connection
- Wireless charging function compatible with mobile phones
- USB output
- Suitable for ST90606, ST90607 and ST90608 Industrial Wireless Rechargeable Work Light





| Article Code | Power | Dimensions (LxWxH) | Net Weight | Input |
|--------------|------------------------------|--------------------|------------|----------|
| ST90610 | 5 W (single) / 10 W (double) | 202 x 106 x 18 mm | 270 g | 5 V, 2 A |





Tape Measure

- ABS housing for increased strength and impact resistance
- Double-sided scale with measurement markings on the top and bottom side of the scale
- Bright yellow blade has clear easy-to-read numerals
- Nylon-coated blade provides extended product life and glare reduction
- Extra-Wide lock button for easy thumb engagement
- · Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Ergonomic case design for better fit in-hand during measuring
- Integrated D-ring with keychain attachment for carrying or storing convenience



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| | <u> </u> | | | |
|--------------|-------------|-----------------|--------------|----|
| Article Code | Tape Length | Tape Width (mm) | Blade Style | |
| ST91311E | 2.0 m | 13.0 | Metric | 12 |
| ST91312E | 3.0 m | 16.0 | Metric | 12 |
| ST91315E | 5.0 m | 25.0 | Metric | 6 |
| ST91316E | 8.0 m | 25.0 | Metric | 4 |
| ST91317E | 10.0 m | 25.0 | Metric | 4 |
| ST91318E | 3.0 m / 10' | 16.0 | Metric / SAE | 12 |
| ST91322E | 5.0 m / 16' | 19.0 | Metric / SAE | 6 |
| ST91323E | 8.0 m / 26' | 25.0 | Metric / SAE | 4 |

Tape Measure

- ABS housing for increased strength and impact resistance
- Bright yellow blade has clear easy-to-read numerals
- · Clear coating extends life of blade and blade markings
- Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Optimized design provides a compact case that fits comfortably in the palm of your hand
- Removable belt clip



| Article Code | Tape Length | Tape Width (mm) | Blade Style | |
|--------------|--------------|-----------------|--------------|----|
| ST91312ME | 3.0 m / 10' | 13.0 | Metric / SAE | 12 |
| ST91314ME | 5.0 m / 16' | 19.0 | Metric / SAE | 12 |
| ST91316ME | 8.0 m / 26' | 25.0 | Metric / SAE | 12 |
| ST91317ME | 10.0 m / 33' | 25.0 | Metric / SAE | 12 |




TAPE MEASURE METRIC/ SAE SCALE

ST91311E ST91312E ST91315E ST91316E ST91317E ST91318E ST91322E ST91323E



ABS housing for resistance



Nylon-coated blade



Extra-wide lock button



Lock holds blade at any length



Hook with automatic reset setting



Integraded D-ring with keychain

METRIC

SAE



Rubber Grip Tape Measure

- Rubber cushion housing absorbs impact for increased strength resistance
- Bright yellow blade has clear easy-to-read numerals
- Clear coating extends life of blade and blade markings
- Blade lock holds blade at any length
- Tape measure hook with automatic reset setting, ensuring that both internal and external measurement start from zero position
- Automatic blade return
- Optimized design provides a compact case that fits comfortably in the palm of your hand
- Rubber cushion for improved grip
- · Removable belt clip



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Tape Length | Tape Width (mm) | Blade Style | |
|--------------|-------------|-----------------|--------------|----|
| ST91333ME | 3 m / 10' | 16.0 | Metric / SAE | 12 |
| ST91335ME | 5 m / 16′ | 19.0 | Metric / SAE | 12 |
| ST91336ME | 8 m / 26 | 25.0 | Metric / SAE | 12 |

Fiberglass Long Tape

- Non-conductive, easy-to-read numerals
- · High impact winding drum for smooth tape recovery
- UV coating extends life of blade and blade markings





| Article Code | Tape Length | Tape Width (mm) | Blade Style | |
|--------------|-------------|-----------------|--------------|---|
| ST91361ME | 15 m / 49' | 13.0 | Metric / SAE | 6 |
| ST91362ME | 30 m / 98' | 13.0 | Metric / SAE | 4 |
| ST91363ME | 50 m / 164' | 13.0 | Metric / SAE | 2 |

Square Zinc Handle

- Zinc handle
- Metric/Imperical scale
- Manufactured from stainless steel for better strength and longer tool life



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Style | |
|--------------|--------------|--------------|---|
| ST91410ME | 150 mm / 6" | Metric / SAE | 6 |
| ST91411ME | 200 mm / 8" | Metric / SAE | 6 |
| ST91412ME | 250 mm / 10" | Metric / SAE | 6 |
| ST91413ME | 300 mm / 12" | Metric / SAE | 6 |

LD Square

- Metric/Imperical scale
- Manufactured from stainless steel for better strength and longer tool life



 \triangle

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | |
|--------------|-----------------------------|---|
| ST91421ME | 610 mm / 24" x 305 mm / 12" | 6 |

3 Pc. Chalk Line Set

| Article Code | Content | |
|--------------|---|----|
| ST91430ME | 1 - 30 m Chalk Reel 1 - 115 g Blue Chalk 1 - Plastic Line Level | 10 |



| Article Code Content | | |
|----------------------|------------------------|----|
| ST91431ME | Chalk Refill Blue 115g | 20 |
| ST91432ME | Chalk Refill Red 115g | 20 |



ST91430ME

3 PC. CHALK LINE SET







Folding crank handle



Locking button



Rubber grip



Vernier Caliper

- Manufactured from stainless steel for high measurement accuracy
- For measurement of inner hole, outer circle, and depth
- Comes in a high quality ABS plastic box





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|--------------|----------|---|
| ST91501SC | 0.0 - 150 mm | ±0.03 mm | 6 |
| ST91502SC | 0.0 - 200 mm | ±0.03 mm | 6 |
| ST91503SC | 0.0 - 300 mm | ±0.03 mm | 4 |

Digital Caliper

- Easy to read large digital display
- 4 way measurement, inside, outside, depth and step ensures accuracy
- Scale and thumb roll makes reset possible at any position
- Wide and clear display measurements in either metric or Imperial units
- Features standard RS-232 output port for easy data collection
- Manufactured from stainless steel for better strength and longer tool life
- Comes in a high quality ABS plastic box



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|------------|----------|---|
| ST91511SC | 0 - 150 mm | ±0.03 mm | 6 |
| ST91512SC | 0 - 200 mm | ±0.03 mm | 6 |
| ST91513 | 0 - 300 mm | ±0.03 mm | 6 |



Dial Caliper

- Manufactured from stainless steel for high measurement accuracy
- Upgraded indicator core for two-way shockproof performance
- Equipped with outer ring locking device
- For measurement of inner hole, outer circle, and depth
- Comes in a high quality ABS plastic box



| Article Code | Size | Accuracy | |
|--------------|------------|----------|---|
| ST91521SC | 0 - 150 mm | ±0.03 mm | 6 |
| ST91522SC | 0 - 200 mm | ±0.03 mm | 6 |



Outside Micrometer

- Measuring surface made from hardened steel to withstand repeated use
- Clearly audible ratchet operation for reassurance that measurement is being performed at constant force
- Locking screw and precision mechanism combine for exceedingly accurate measurements
- Comes in a high quality ABS plastic box





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|------------|-----------|---|
| ST91531SC | 0 - 25 mm | ±0.004 mm | 6 |
| ST91532SC | 25 - 50 mm | ±0.004 mm | 6 |
| ST91533SC | 50 - 75 mm | ±0.004 mm | 6 |

Aluminum Box Level

- Best frame strength-to-weight ratio
- Helps with fast and accurate installations
- Ruler with scale for easy measurement
- Built from one piece of aluminum for strength and durability
- Two shock absorbent end caps protect frame





| Article Code | Size | Accuracy | |
|--------------|--------|-----------|----|
| ST91601ME | 30 cm | ±0.5 mm/m | 10 |
| ST91602ME | 45 cm | ±0.5 mm/m | 10 |
| ST91603ME | 60 cm | ±0.5 mm/m | 10 |
| ST91604ME | 75 cm | ±0.5 mm/m | 6 |
| ST91605ME | 90 cm | ±0.5 mm/m | 6 |
| ST91606ME | 120 cm | ±0.5 mm/m | 6 |

Aluminium Magnetic Box Level

- Magnetic, easy to operate
- Best frame strength-to-weight ratio
- Helps with fast and accurate installations
- · Ruler with scale for easy measurement
- Built from one piece of aluminum for strength and durability
- Two shock absorbent end caps protect frame





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|----------|-----------|----|
| ST91611ME | 30.0 cm | ±0.5 mm/m | 10 |
| ST91612ME | 45.0 cm | ±0.5 mm/m | 10 |
| ST91613ME | 60.0 cm | ±0.5 mm/m | 10 |
| ST91614ME | 75.0 cm | ±0.5 mm/m | 10 |
| ST91615ME | 90.0 cm | ±0.5 mm/m | 6 |
| ST91616 | 120.0 cm | ±0.5 mm/m | 5 |



Magnetic Torpedo Level

- Magnetic, easy to operate
- Helps with fast and accurate installations
- Two shock absorbent end caps protect frame





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Accuracy | |
|--------------|-------------|-----------|----|
| ST91621ME | 230 mm / 9" | ±0.5 mm/m | 10 |

Steel Rule

- Manufactured from stainless steel for improved strength and durability
- Easy-to-read graduations marked on both sides on both edges
- Deeply-etched permanent markings are black- and redfilled for easy reading and wear resistance





| Article Code | Size | Total Length (mm) | |
|--------------|------|-------------------|----|
| ST91401 | 6" | 150.0 | 12 |
| ST91402 | 12" | 300.0 | 9 |
| ST91403 | 20" | 500.0 | 9 |
| ST91404 | 40" | 1000.0 | 4 |

ST62712 ST62713

PROFESSIONAL LASER **DISTANCE METER**



Measurement accuracy +/- 2 mm



Angle measurement function



Beeper prompts 5 lines of measurement recording



data shown simultaneously



Stores up to 20 sets of data history



Easily rechargeable with micro **USB**

60m

100m

SAE

METRIC



Laser Distance Meter

- Measurement accuracy of +/-3mm
- Compact size for convenient transportation and storage
- Single key for easy operation
- HD backlight display shows data clearly
- Rugged case for durability
- Automatic shutdown for saving power
- ✓ Single measurement







Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Range | Measuring Unit | Laser Level | Laser Type | Battery | |
|--------------|-------|----------------|-------------|----------------------|---------------|---|
| ST62709 | 30 m | m / ft + in | Class 2 | 630 - 670 nm, < 1 mW | AAA 2 x 1.5 V | 6 |

Professional Laser Distance Meter

- Measurement accuracy +/-2mm
- Angle measurement function
- Display capable of showing 5 lines of data simultaneously for comparison
- Stores up to 20 sets of data history
- Beeper prompts when measurement has been recorded
- · Easily rechargeable with common micro USB
- · Automatic shutdown for saving power
- ✓ Single measurement
- ✓ Quadratic Pythagorean
- ✓ Continuous measurement
- ✓ Automatic level
- ✓ Area measurement
- ✓ Automatic vertically
- ✓ Volume mesasurement
- ✓ Addition and Subtraction
- ✓ Simple Pythagorean










| Article Code | Range | Measuring Unit | Laser Level | Laser Type | |
|--------------|-------|------------------|-------------|----------------------|---|
| ST62712 | 60 m | m /ft/ in /ft+in | Class 2 | 630 - 670 nm, < 1 mW | 1 |
| ST62713 | 100 m | m /ft/ in /ft+in | Class 2 | 630 - 670 nm, < 1 mW | 1 |



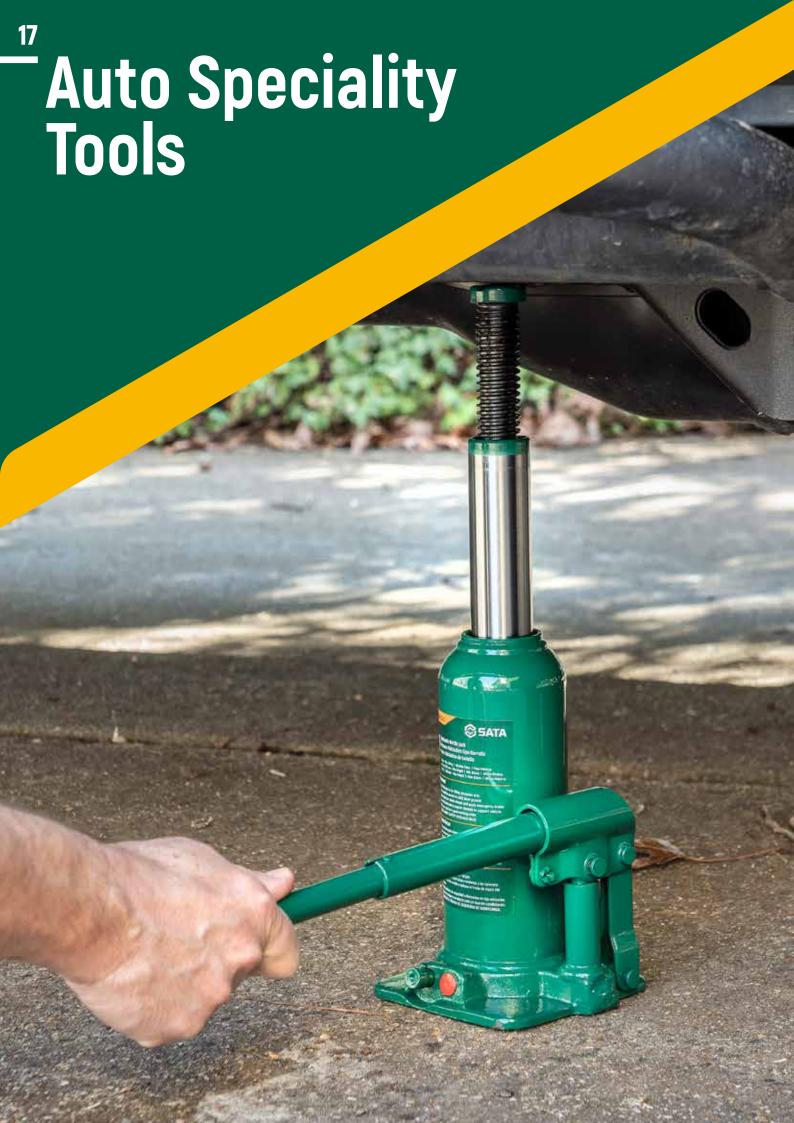

3 Pc. L-Shaped Wheel Wrench Set

| Article Code | Content | |
|--------------|---|---|
| ST09531SJ | 1 - 1/2" Dr. Offset Handle 345 mm 1 - 1/2" Dr. Dual Head Socket 17 x 19 mm 1 - 1/2" Dr. Dual Head Socket 21 x 23 mm | 5 |

| Article Code | Content | |
|--------------|---|---|
| ST09152SJ | 1- Anvil Dolly 1- Wedge Dolly 1- Pry Bumping Spoon 1- Toe Dolly 1- Light Shrinking Hammer 1- Pick & Finishing Hammer | 2 |

6 Pc. Automotive Body Repair

Tool Set

Please refer to the warranty terms of the individual product.







50 Pc. Auto Repair Master Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST09508 | 1- 1/2" Dr. Quick-Release Ratchet 11- 1/2" Dr. 12pt. Metric Sockets 8, 10, 12, 17, 18, 19, 20, 21, 22, 24, 27 mm 1- 1/2" Dr. 50L Bit Socket Hex 17 mm 1- 1/2" Dr. 100L Bit Socket Hex 7 mm 9- 1/2" Dr. Extra Long Bit Sockets Hex 6x70, 8x120, 6x250, 5x180, 6x140, 10x140 mm Triple Square M8x100, M10x120, M10x140 mm 9- Extra Long Arm Ball Point Hex Key Set 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10 mm 2- 1/2" Dr. Spark Plug Sockets 16, 21 mm 6- Raised Panel Combination Wrenches 8, 10, 13, 17, 19, 22 mm 2- Cushion Grip Go-Through Screwdrivers Slotted 6x100 mm Phillips #6x100 mm 8- Accessories 1/2" Dr. T-Handle 1/2" Dr. Universal Joint 1/2" Dr. Universal Joint 1/2" Dr. Offset Handle 260 mm 3/8" Dr. Two Way Oil Filter Wrench with Adapter Front Shock Absorber Socket | 2 |



56 Pc. Auto Repair Master Tool Set

| Article Code | Content | |
|--------------|--|---|
| ST09509 | 1- 3/8" Dr. Quick-Release Ratchet 15- 3/8" Dr. 6pt. Metric Sockets 7, 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24 mm 2- 3/8" Dr. Spark Plug Sockets 16, 21 mm 11- Metric Combination Wrenches 8, 10, 12, 13, 14, 15, 16, 17, 18, 19, 22 mm 1- Long Nose Pliers 6" 1- Slip Joint Pliers 2- Cushion Grip Go-Through Screwdrivers Slotted 6x 100 mm Phillips #2x100 mm 9- 1/4" Shank 25L Bits Slotted 4, 5, 6.5 mm Phillips #1, #3 Hex 3, 4, 5, 6 mm 9- Accessories 1/4" Dr. Spinner Handle 1/4" Dr. x1/4" Shank Bit Adapter 3/8" Dr. Universal Joint 1/4" Fx3/8" M, 3/8"Fx1/4" M Socket Adapters 1/2" Fx3/8" M, 3-Way Adapter 9 Pc. Long Arm Tamper-Proof Torx® Key Set TT10, TT15, TT20, TT25, TT27, TT30, TT40, TT45, TT50 | 3 |



Please refer to the warranty terms of the individual product.

53 Pc. Telecom Set

| Article Code | Content | |
|--------------|---|---|
| ST09535SJ | 11 - 1/4" Dr. 6pt. Metric Sockets 4, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13 mm 15 - 1/4" Shank 25L Bits Slotted 4, 5.5, 6.5 mm Phillips #1, #2, #3 Tamper-Proof Torx® T10, T15, T20 Hex 2, 2.5, 3, 4, 5, 6 mm 4 - Acetate Screwdrivers Philips #1x75 mm, #2x200 mm Slotted 5x75 mm, 6x100 mm 6 - Precision Combination Screwdrivers Philips #000x75 mm, #0x100 mm, #1x150 mm Slotted 2x75 mm, 3x100 mm, 4x150 mm 17 - Accessories 1/4" Drive Bit Adapter 25 mm 1/4" Drive Magnetic Bit Driver Circuit Tester Long Nose Pliers 6" Diagonal Pliers 6" Electrician's Knife Soldering Iron 30W Soldering Iron Stand Anti-static Brush Digital Multi-meter Desoldering Pump Insulation Tape Adjustable Wrench 6" Solder Wire 17G Aluminum Flashlight Self Adjusting Wire Stripper 6-1/2" Tape Measure 3 m" | 2 |



HYDRAULIC BOTTLE JACK

ST97801ASC ST97802ASC ST97803ASC ST97804ASC ST97805ASC ST97807ASC ST97808ASC ST97809ASC ST97810ASC



Welded steel construction



Two-Piece handle design



Center adjustment



Double levers for user ergonomics



ST97817SC


HEAVY DUTY ST97813A LOW PROFILE SERVICE JACK 2T / 3T



Safety overload device



Dual piston pump



Ultra low profile



Dual handle design



Precision control Ergonomic in any handle position



design



17

Hydraulic Bottle Jack

- · Welded steel construction for leak free performance
- Two-piece handle design for easy storage
- Center Adjustment
- Double levers for user ergonomics



⚠

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Load Capacity | Min. Height (mm) | Max. Height (mm) | Extender Heigt (mm) | |
|--------------|---------------|------------------|------------------|---------------------|---|
| ST97801ASC | 2 T | 181 | 344.0 | 48.0 | 6 |
| ST97802ASC | 4 T | 193 | 373.0 | 60.0 | 6 |
| ST97803ASC | 6 T | 210 | 416.0 | 70.0 | 4 |
| ST97804ASC | 8 T | 225 | 455.0 | 80.0 | 4 |
| ST97805ASC | 10 T | 230 | 460.0 | 80.0 | 4 |
| ST97807ASC | 16 T | 230 | 440.0 | 60.0 | 4 |
| ST97808ASC | 20 T | 242 | 452.0 | 60.0 | 4 |
| ST97809ASC | 32 T | 275 | 440.0 | - | 4 |
| ST97810ASC | 50 T | 265 | 425.0 | - | 4 |

Heavy Duty Low Profile Service Jack 2 T

- · Built-in safety overload device prevents use beyond rated capacity
- Dual piston pump for rapid lifting
- Ultra low profile is ideal for sport cars and vehicles with flat tires and low chassis
- Patent dual handle design for better leverage and a solid grip
- Universal joint release mechanism for precision control in any handle position
- Ergonomic design
- Manufactured from steel with reinforced body
- Meets or exceeds ASME PALD-2009





| Article Code | Load Capacity | Max. Height (mm) | Min. Height (mm) | |
|--------------|---------------|------------------|------------------|---|
| ST97817SC | 2 T | 505.0 | 76.0 | 1 |

Heavy Duty Low Profile Service Jack 3 T

- · Built-in safety overload device prevents use beyond rated capacity
- Dual piston pump for rapid lifting
- Ultra low profile is ideal for sport cars and vehicles with flat tires and low chassis
- Patent dual handle design for better leverage and a solid grip
- Universal joint release mechanism for precision control in any handle position
- Manufactured from steel with reinforced body
- Meets or exceeds ASME PALD-2009





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Load Capacity | Max. Height (mm) | Min. Height (mm) | |
|--------------|---------------|------------------|------------------|---|
| ST97813A | 3 T | 502.0 | 78.0 | 1 |

14 Pc. Feeler Gauge Set 0.05 - 1.00 mm 16 Pc. Feeler Gauge Set 0.05 - 1.00 mm


| Article Code | Content | |
|--------------|---|----|
| ST09401SJ | 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.60, 0.70, 0.80, 0.90, 1.00 mm | 24 |


| Article Code | Content | |
|--------------|---|--|
| ST09402SJ | 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.50, 0.55, 0.60, 0.70, 0.75, 0.80, 0.90, 1.00 mm | |



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.







17

23 Pc. Feeler Gauge Set 0.02 - 1.00 mm 32 Pc. Feeler Gauge Set 0.02 - 1.00 mm

| Article Code | Content | |
|--------------|---|----|
| ST09405SJ | 0.02, 0.03, 0.04, 0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm | 36 |

Article Code Content

\$\text{ST09407SJ} \quad 0.02, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.13, 0.15, 0.18, 0.20, 0.23, 0.25, 0.28, 0.30, 0.33, 0.38, 0.40, 0.45, 0.50, 0.55, 0.60, 0.63, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 1.00 mm

\$\text{Article Code} \quad \text{Content} \quad \text{\$\text{Content} \quad \text{\$\text{Content} \quad \text{\$\tex{\$\text{\$\text{\$\text{\$\text{\$\text{\$\text{\$\text{\$\text{\$\text{\$



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.





3 Pc. Fuel and AC Disconnect Tool Set 8 Pc. End Cap Oil Filter Wrench Set

| Article Code | Content | |
|--|---------|----|
| ST09406SJ 1 - Ford fuel line coupling tool 1 - Ford A/C and fuel line spring lock coupling to 1 - Fuel line quick disconnect tool | | 10 |

| Article Code | Content | |
|--------------|---|---|
| ST09703SJ | 6 - 1/2" Dr. End Cap Oil Filter Wrenches 65, 74, 76, 80, 90, 93 mm 1 - 3/8" Dr. Quick-Release Ratchet 1 - 3/8" F x 1/2" M Socket Adapter | 4 |





End Cap Oil Filter Wrench

- For use with a 1/2" square drive tool
- Black electro-deposition coated finish for durability and corrosion resistance
- Overtop access application



| Article Code | Size (mm) | Flute (mm) | |
|--------------|-----------|------------|---|
| ST97401ST | 65.0 | 14.0 | 4 |
| ST97403ST | 74.0 | 15.0 | 4 |
| ST97404ST | 76.0 | 14.0 | 4 |
| ST97405 | 80.0 | 15.0 | 4 |
| ST97406 | 90.0 | 15.0 | 4 |

Drive End Cap Oil Filter Wrench

- For use with a 1/2" square drive tool
- Black electro-deposition coated finish for durability and corrosion resistance
- Overtop access application



| Article Code | Size (mm) | Flute (mm) | |
|--------------|-----------|------------|---|
| ST97407 | 93.0 | 15.0 | 4 |

Oil Filter Wrench

- Universal adjustment
- · Professional, ergonomic dipped grips wipe clean easily
- · Chrome plated finish to resist corrosion





| Article Code | Size (mm) | 4 |
|--------------|-------------|----|
| ST97427SC | 55.0 - 75.0 | 12 |
| ST97428SC | 75.0 - 95.0 | 12 |

 Strap is made of high strength nylon and handle is made of forged steel

• Use with 1/2" drive tools or 13/16" wrench tools to handle filters with diameters up to 120 mm



<u>^</u>

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size (mm) | Capacity (mm) | |
|--------------|-----------|---------------|----|
| ST97431ME | 240.0 | 120.0 | 12 |

Oil Filter Strap Wrench

- For use on oil filters up to 120 mm diameter
- Strong nylon belt will not slip
- Use with 1/2" drive tools or 13/16" wrench tools
- Chrome vanadium steel buckle



| Article Code | Size | Capacity (mm) | |
|--------------|------|---------------|----|
| ST97441ST | 18" | 120.0 | 12 |

Universal 3-Jaw Oil Filter Wrench

- Use with 1/2" square drive tools with no adapter required
- · Heavy duty design with increased torque to loosen tough filters
- Provides a wide application range from 63 102 mm (2.5" 4")



| Article Code | Max Diameter (mm) | Min Diameter (mm) | | |
|--------------|-------------------|-------------------|---|--|
| ST97422ST | 102.0 | 63.0 | 2 | |

Adjustable Oil Filer Wrench Pliers

- Two clamp handle for maximum clamping power
- Professional dipped grips for easy cleaning and better control
- For removing oil filters from 63.5 mm to 116.0 mm in diameter



| Article Code | Max Diameter (mm) | Min Diameter (mm) | |
|--------------|-------------------|-------------------|---|
| ST97426ST | 116.0 | 63.5 | 6 |

Chain Wrench

- Excellent for pipe fittings
- Great for confined areas where regular pipe wrenches cannot reach
- High-visibility stamped markings provide quick size identification
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Manufactured from steel for better strength and longer tool life



| Article Code | Size | Capacity (mm) | |
|--------------|------|---------------|---|
| ST97451SC | 12" | 55.0 - 110.0 | 4 |
| ST97452SC | 15" | 60.0 - 130.0 | 4 |

1/2" Drive Air Impact Wrench 625 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- Variable speed trigger gives control over RPM
- Compact design
- 1/4" Air intake





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|----|
| ST01111 | 625 Nm | 400 Nm | 10.000 RPM | 90 PSI, 6,35 kgf/cm ² | 4.7 CFM | 1.5 kg | 10 |

1/2" Drive Air Impact Wrench 800 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- · Variable speed trigger gives control over RPM
- · Classic design
- 1/4" Air intake







| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|---|
| ST01113C | 800 Nm | 600 Nm | 7.500 RPM | 90 PSI, 6,35 kgf/cm ² | 4.2 CFM | 2.2 kg | 6 |

1/2" Drive Air Impact Wrench 1050 Nm

- Hard hitting twin hammer provides high torque output while reducing vibration
- Handle exhaust at bottom cable directs debris and dust away from machine and operator
- Variable speed trigger gives control over RPM
- Solid fiberglass handle covered with a molded nylon jacket
- 1/4" Air intake





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Max Torque | Working Torque | Free Rotation | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|---------------|----------------------------------|-----------------|--------|---|
| ST01119 | 1050 Nm | 800 Nm | 8.500 RPM | 90 PSI, 6,35 kgf/cm ² | 4.8 CFM | 2.2 kg | 6 |

1" Drive Heavy Duty Air Impact Wrench

 Shock resistant housing with plastic protector helps protect tool and prevent scuffing

 Ergonomic design is 10% lighter than competitors without compromising on perfromance

 9" (23 cm) rod can be used for automotive repairs, major construction projects, heavy equipment maintenance, or product assembly

Air line does not neet to be removed for lubrication

45° Air intake for better equipment handling

• 1/2" Air intake





| Article Code | Max Torque | Working Torque | Idle Speed | Working Pressure | Air Consumption | Weight | |
|--------------|------------|----------------|------------|--------------------------------|-----------------|---------|---|
| ST01133SC | 4000 Nm | 3000 Nm | 8.500 RPM | 110 PSI, 8 kgf/cm ² | 15 CFM | 16.8 kg | 1 |

ST01111 ST01113C ST01119

1/2" DRIVE AIR IMPACT WRENCH












Variable speed trigger



ST01133SC

1" DRIVE HEAVY DUTY AIR IMPACT WRENCH







10% lighter



9" (23 cm) rod



No need to remove air line for lubrication



45° Air intake



Piston Ring Compressor

- Tool is beaded along lower edge to prevent compressor from entering the cylinder
- Heavy spring steel compresses the stiffest rings evenly
- Positive lock action provides positive compression and fingertip release



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Working Range (mm) | |
|--------------|------|--------------------|----|
| ST97501SC | 3" | 53.0 - 175.0 | 30 |
| ST97502SC | 4" | 60.0 - 175.0 | 30 |

Cross Wheel Wrench

- For use on lugnut sizes 17 mm, 19 mm, 21 mm
- Single hex (6 pt.) fastener end design
- Off-corner loading design reduces fastener rounding
- 1/2" drive end allows for 1/2" drive socket to be added
- Ball detent for secure socket retention
- Bright, full polish chrome finish easily wipes clean and resists corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability





| Article Code | Size | 4 | |
|--------------|---------------------|---|--|
| ST48101ST | 17, 19, 21 mm, 1/2" | 4 | |

5 Pc. Fine Threaded Extractor Set

- Fine thread for removing screws and studs that cannot be held firmly
- Tapered extractors for broken screws and studs
- · Coarse thread design for longer usage life
- Tempered steel construction offers strength and durability for long-lasting performance
- Comes in sturdy plastic case for organization and storage





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Content | |
|--------------|--------------------|----|
| ST09704SJ | 2, 3, 4, 6.5, 7 mm | 20 |

5 Pc. Coarse Threaded Extractor Set

- Used to quickly remove broken, embedded or damaged screws
- · Coarse thread design for longer usage life
- Tempered steel construction offers strength and durability for long-lasting performance
- · Comes in sturdy plastic case for organization and storage





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Content | |
|--------------|-----------------------------|---|
| ST09704ASJ | 3.3, 5.3, 6.4, 8.8, 11.2 mm | 6 |

5 Pc. Hook and Pick Set

- Use to pull 0-rings, seals, and split pins quickly and easily
- Includes magnetic handle
- Magnetic handle retrieves small ferrous metal parts easily
- Heat treated for long lasting durability





| Article Code | Content | |
|--------------|--|----|
| ST09709SJ | 1- Magnetic Aluminum Handle 5" 4- Picks O-Ring, 90°, Straight, Hook | 20 |

- Reversible Jaws for internal or external applications
- Heat treated for long lasting durability
- · Pilot point on screw tip for centering
- · Phosphate coating on the spindle to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Size | Overall Length (mm) | Jaw Capacity (mm) | |
|--------------|------|---------------------|-------------------|---|
| ST90623SC | 3" | 125.0 | 75.0 | 1 |
| ST90624SC | 4" | 155.0 | 100.0 | 1 |
| ST90626SC | 6" | 240.0 | 150.0 | 1 |
| ST90628SC | 8" | 325.0 | 200.0 | 1 |

3-Jaw Reversible Pullers

- Reversible Jaws for internal or external applications
- Heat treated for long lasting durability
- · Pilot point on screw tip for centering
- Phosphate coating on the spindle to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Size | Overall Length (mm) | Jaw Capacity (mm) | |
|--------------|------|---------------------|-------------------|---|
| ST90633SC | 3" | 125.0 | 75.0 | 1 |
| ST90634SC | 4" | 155.0 | 100.0 | 1 |
| ST90636SC | 6" | 240.0 | 150.0 | 1 |
| ST90638SC | 8" | 325.0 | 200.0 | 1 |
| ST90640 | 10" | 340.0 | 250.0 | 1 |
| ST90642 | 12" | 385.0 | 300.0 | 1 |

Ball Joint Puller Large

- 2 Jaw puller design
- Swivel design provides better access to hard to reach areas
- Jaws spread up to 10-150 mm (0.39" 5.91") wide
- Chrome plated finish to resist corrosion
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Jaw Capacity | |
|--------------|-----------------------------|---|
| ST90662SC | 10.0-150.0 mm (0.39"-5.91") | 6 |

Universal Ball Joint Separator

- Tool separates ball joints from steering knuckles
- · Adjustable for removing ball joints in limited space
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | |
|--------------|---|
| ST90651SC | 6 |

50 - 75 mm Bearing Separator

- For pulling and removing bearings
- Chrome molybdenum alloy steel (Cr-Mo) for exceptional strength and durability





| Article Code | |
|--------------|----|
| ST90658ST | 12 |

Ball Joint Separator

- Tool separates ball joints from steering knuckles
- Forged to withstand hard usage



| Article Code | Size | |
|--------------|------|---|
| ST90665 | 12" | 6 |

Universal Ball Joint Separator

- Tool separates ball joints from steering knuckles
- Works on ball joints from 1-1/8" 2-1/8" and 30 mm 56 mm in size
- · Adjustable for removing ball joints in limited space
- Heat treated for long lasting durability
- Chrome vanadium alloy steel (Cr-V) for exceptional strength and durability



| Article Code | Capacity | |
|--------------|--------------------------------|----|
| ST90652SC | 3.0 - 56.0 mm (1-1/8 - 2-1/8") | 16 |

Wheel Weight Tool

• Designed to install and remove all types of wheel weight





| Article Code | 6 |
|--------------|---|
| ST92107SC | 6 |

Anvil Dolly

 Made of high carbon steel, forged and tempered, for strength and durability



| Article Code | |
|--------------|---|
| ST92203SC | 6 |

Wedge Dolly

 Made of high carbon steel, forged and tempered, for strength and durability



| Article Code | |
|--------------|---|
| ST92205SC | 6 |

Toe Dolly

 Made of high carbon steel, forged and tempered, for strength and durability



| Article Code | |
|--------------|---|
| ST92207SC | 6 |

Drip Molding Spoon

 Made of high carbon steel, forged and tempered, for strength and durability



| Article Code | |
|--------------|---|
| ST92209SC | 6 |

Coil Spring Compressor

- Reinforced screw thread desgin to ensure safety
- Suitable for use where space under wheel arch is limited
- Works with 1/2" drive tools or with 21 mm socket and wrench
- · Forged steel jaws for extended tool life



| Article Code | Size (mm) | |
|--------------|-----------|---|
| ST97701SC | 270.0 | 8 |
| ST97702SC | 370.0 | 8 |

Grease Gun Coupler

- Unique coupler design includes a steel ball to prevent backflow of passing lubricants
- Replacement for common grease guns



A

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | |
|--------------|----|
| ST97211 | 18 |

Flexible Grease Gun Whip Hose

- For use with manual grease guns to reach into confined areas
- Heavy duty high strenght nylon sleeve for handling high pressure from hand held grease guns





| Article Code | Overall Length (mm) | |
|--------------|---------------------|---|
| ST97212 | 300.0 mm | 9 |
| ST97213 | 450.0 mm | 9 |

Pistol Grip Grease Gun

- Tips are designed to ensure tighter tolerance and fit
- Hardened spring for consistant pressure
- Dual direction loading
- Compact and lightweight construction reduces user fatigue
- Unique filling nipple design with steel ball to prevent backflow
- Special plunger lock for safe and convenient filling





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | |
|--------------|---------------|------------------|-----------------------|---------------------|----|
| ST97201 | 100 cc | 2900 psi | 4000 psi | 0.5 oz / 40 strokes | 12 |

Plastic Handle Grease Gun

- 3 Way loading 400 ml / 14 oz simple package oil, sealed oil tank or 400 CC bulk oil
- Durable die-cast head for longer service life
- · Hardened spring for consistant pressure
- Unique filling nipple design with steel ball to prevent backflow
- Special plunger lock for safe and convenient filling
- Quality steel lever handle with comfortable rubber grip





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | |
|--------------|---------------|------------------|-----------------------|-------------------|----|
| ST97203 | 400 cc | 4500 psi | 10000 psi | 1 oz / 40 strokes | 12 |

Heavy Duty Grease Gun

- 3 Way loading 400 ml / 14 oz cartridge, filter pump or 600 CC bulk oil
- New "monticle" exhaust nozzle design, improving exhaust effect and lowering air pressuer
- Anti-impurity filter screen to prevent blockage caused by impurities entering the grease delivery pipe when adding bulk grease
- Lightweight aluminum alloy nozzle with extended handle design for improved leverage
- Equipped with a hose and nozzle for special access
- Quality steel lever handle with comfortable rubber grip



| Article Code | Bulk Capacity | Working Pressure | Max. Working Pressure | Output | |
|--------------|---------------|------------------|-----------------------|-------------------|---|
| ST97204A | 600 cc | 7000 psi | 10000 psi | 1 oz / 40 strokes | 1 |



High Leverage Riveter

- · High leverage design
- Spring loaded
- Convenient nose piece storage in handle
- Designed for 2.4 mm (3/32), 3.2 mm (1/8), 4 mm (5/32), 4.8 mm (3/16) rivets





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Included tip sizes | |
|--------------|------|-----------------------|---|
| ST90501SC | 8" | 2.4, 3.2, 4.0, 4.8 mm | 6 |

High Leverage Riveter With Collection Bottle

- High leverage non-slip handle design provides the power to pull larger rivets and ensures durability
- Pull and set rivets up to 4.8 mm (ST90504) / 6.4 mm (ST90502) with ease
- Plastic collection bottle for easy disposal of spent mandrels
- · Heavy duty steel construction



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Included tip sizes | |
|--------------|------|----------------------------|---|
| ST90504 | 11" | 2.4, 3.2, 4.0, 4.8 mm | 8 |
| ST90502 | 13" | 2.4, 3.2, 4.0, 4.8, 6.4 mm | 8 |

Air Blow Gun

- Working pressure: 5.0 ~ 8.0 kgf/cm²
- Brass pipe fitting size: 1/4" NPT
- Air pipe (I.D. 1/4"): 350 L/min Air pipe (I.D. 3/8"): 430 L/min
- Δir flow-

1/4" inside diameter air tube: 350 L/Min 3/8" inside diameter air tube: 430 L/Min



| Article Code | Size (mm) | |
|--------------|-----------|---|
| ST97221SC | 100.0 | 5 |
| ST97222SC | 250.0 | 5 |



Roller Seat with Magnetic Trays

- · Air shock adjustable seat to suit any need
- 5 magnetic parts trays in the base for convenient storage
- Solid solvent resistent rubber seat
- Seat swivels 360° for extra mobility
- Simple and fast assembly without any tools required



<u>^</u>

Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Width (mm) | Depth (mm) | Hight (mm) | |
|--------------|------------|------------|------------|---|
| ST95440 | 430.0 | 430.0 | 550.0 | 1 |

40" Creeper with Magnetic Trays

- Metal plates next to headrest for easy mounting of magnetic lights
- 135 kg /300 lb capacity
- Magnetic parts trays for convenient storage
- Custom-molded composite frame provides lasting durability
- · Concave design ensures high comfort and ergonomic handling
- Back pad and head rest made of durable reinforced fibre
- Ball bearing casters reduce vibration





Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Width (mm) | Depth (mm) | Hight (mm) | |
|--------------|------------|------------|------------|---|
| ST95441 | 520.0 | 1000.0 | 150.0 | 1 |

Circuit Tester

- Measuring range from 100 500 V
- Tempered steel construction offers strength and durability for long-lasting performance





Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | 4 |
|--------------|-----------|----|
| ST62501ST | 145.0 | 24 |
| ST62502ST | 190.0 | 24 |

Digital Circuit Tester

- LED Digital display
- Testing range of 12, 36, 55, 110 and 220 V
- Features compact design
- No battery required





Excluded from Lifetime Warranty terms

| Article Code | Size (mm) | |
|--------------|-----------|----|
| ST62601ST | 130.0 | 24 |

Automotive Circuit Tester 6 V / 12 V / 24 V

- Designed for vehicles low voltage circuits
- Light turns on when voltage is detected
- Flexible coil cord
- · Long-life LED tube
- Spring loaded terminal clamp





Excluded from Lifetime Warranty terms

| Article Code | |
|--------------|----|
| ST62503ST | 10 |





33" Extendable Indexing Pry Bar

Head rotates 180° through 14 locking positions for better access and leverage

Flex head tool provides access to areas fixed head tools cannot reach

- Grooved head profile grips and holds securely, even in tight confines and at the fullest extension
- Black oxide finish to resist corrosion
- Manufactured from steel for better strength and longer tool life
- Meets or exceeds DIN/ASME and ANSI requirements for proven strength, making it the perfect tool for heavyduty automotive or industrial work



| Article Code | Length (mm) | Width (mm) | Hight (mm) | | |
|--------------|-------------|------------|------------|--|--|
| ST92568 | 629.0 | 25.0 | 25.0 | | |

2 Pc. Indexing Pry Bar Set

Heads rotate 180° through 14 locking positions for better access and leverage

Flex head tools provide access to areas fixed head tools cannot reach

 Grooved head profile grips and holds securely, even in tight confines and at the fullest extension

- Black oxide finish to resist corrosion
- Manufactured from steel for better strength and longer tool life
- Alloy steel bodies and black phosphate finish



| Article Code | Content | |
|--------------|---------|---|
| ST92569 | 8, 16" | 1 |

Wood Handle Putty Scraper

- Precision ground blade for heavy duty edges
- Wood handle offers ease of grip so you can work confidently over time
- Can be used for clearing dirt on engine cylinder surface and other metal surfaces





| Article Code | |
|--------------|----|
| ST95201ST | 12 |


ST92568 ST92569

INDEXING PRY BARS









Head profile grips and holds securely



Black oxide finish



Manufactured from steel



Magnetic Pick-Up Tool

- Extended shaft for better access
- Features sewn in, powerful magnets which stay on any metal surface easily
- Sleek handle design for maximum power, user comfort, and greater access
- High-impact, contoured handle presents an ergonomic and strong grip
- Oil and solvent resistant handle provides a longer tool life
- · Handle designed with "through hole" for easy storage






Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code Overall Length Min (mm) | | Overall Length Max (mm) | | | | |
|--------------------------------------|-------|-------------------------|---|--|--|--|
| ST11924ST | 165.0 | 545.0 | 6 | | | |

Flexible Magnetic Pick-Up Tool

- 100% solid impact resistant acetate handle for lasting durability
- Durable soft shank surface with chrome plating provides flexibility for any working environment
- Handle designed with "through hole" for easy storage
- Chrome plated finish to resist corrosion

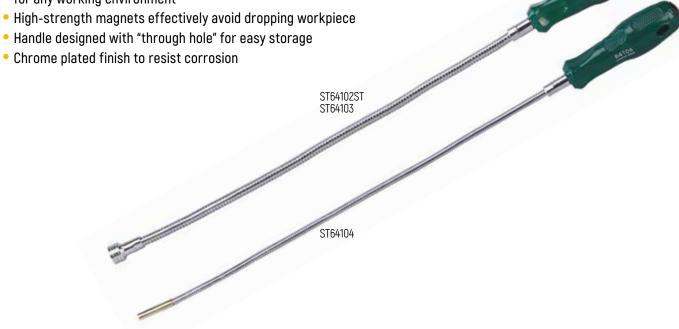



| Article Code | Size (mm) | Holding Capacity (kg) | Overall Length (mm) | |
|--------------|-----------|-----------------------|---------------------|---|
| ST64104 | 6.0 | 0.5 | 502.0 | 6 |
| ST64101 | 6.0 | 1.0 | 502.0 | 8 |
| ST64102ST | 8.0 | 2.0 | 510.0 | 6 |
| ST64103 | 8.0 | 3.0 | 510.0 | 6 |

C-Clamp

- Iron frame with steel screw and swivel, sliding pin handle
- · Powder coated metal for long lasting durability



Nature of this product is subject to wear and tear upon usage. Not covered under Lifetime Warranty.

| Article Code | Size | Max Crimping Depth (mm) | Max Crimping Thickness (mm) | Overall Hight (mm) | Overall Length (mm) | Overall Width (mm) | |
|--------------|------|----------------------------|--------------------------------|-----------------------|------------------------|--------------------|---|
| ST90433ST | 3" | 48.0 | 75.0 | 92.0 | 174.0 | 179.0 | 4 |
| ST90434ST | 4" | 54.0 | 100.0 | 107.0 | 216.0 | 19.0 | 4 |
| ST90435ST | 6" | 70.0 | 150.0 | 129.0 | 282.0 | 21.0 | 2 |
| ST90436ST | 8" | 83.0 | 200.0 | 147.0 | 343.0 | 222.0 | 1 |

Mechanics Bench Vise

- Square steel structure provides high strength clamping force for safety use
- Replaceable serrated main jaws provide tight grip
- · Large anvil work surface for shaping
- Machined base plate for smooth swivel with lug holes for secure positioning
- Manufactured from heavy duty cast iron for strength and durability



<u>^</u>

| Article Code | Size | Maxi Crimping Width (mm) | Crimping Force | Jaw Width (mm) | |
|--------------|------|--------------------------|----------------|----------------|---|
| ST70841SC | 4" | 108.0 | 1700 kg | 102.0 | 1 |
| ST70842SC | 5" | 133.0 | 2100 kg | 127.0 | 1 |
| ST70843SC | 6" | 152.0 | 3000 kg | 152.0 | 1 |
| ST70845SC | 8" | 203.0 | 4000 kg | 203.0 | 1 |



Article Code Index

| Article Code | Page No. | Article Code | Page No. |
|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|-----------------------|-------------|
| SC09928 | 26 | SC21501 | 58 | SC34213 | 104 | SC48531 | 134 | SC59472 | 243 | SC90751 | 258 |
| SC09930-1 | 29 | SC21502 | 58 | SC34303T | 109 | SC48603 | 135 | SC59473 | 243 | SC90753 | 258 |
| SC09931-1 | 30 | SC21503 | 58 | SC34304T | 109 | SC48604 | 135 | SC59474 | 243 | SC90771 | 258 |
| SC09946-1 | 27 | SC22101 | 70 | SC34305T | 109 | SC48605 | 135 | SC59475 | 243 | SC90774 | 258 |
| SC09947-1 | 28 | SC22102 | 70 | SC34306T | 109 | SC48607 | 135 | SC59476 | 243 | SC90775 | 258 |
| SC11201 | 53 | SC22103 | 70 | SC34307T | 109 | SC48609 | 135 | SC80104 | 247 | SC90776 | 258 |
| SC11202 | 53 | SC22104 | 70 | SC34308T | 109 | SC48610 | 135 | SC80105 | 247 | SC90782 | 258 |
| SC11203 | 53 | SC22105 | 70 | SC34309T | 109 | SC48611 | 135 | SC80106A | 247 | SC90783 | 258 |
| SC11204 | 53 | SC22106 | 70 | SC34310T | 109 | SC48612 | 135 | SC80107A | 247 | SC90784 | 258 |
| SC11205 | 53 | SC22107 | 70 | SC34311T | 109 | SC48613 | 135 | SC80108A | 247 | SC90785 | 258 |
| SC11206 | 53 | SC22108 | 70 | SC34312T | 109 | SC48614 | 135 | SC80110A | 247 | ST01111 | 297 |
| SC11207 | 53 | SC22109 | 70 | SC34314T | 109 | SC48615 | 135 | SC80112A | 247 | ST01113C | 297 |
| SC11208 | 53 | SC22110 | 70 | SC34315T | 109 | SC48616 | 135 | SC80114A | 247 | ST01119 | 298 |
| SC11209 | 53 | SC22111 | 70 | SC34316T | 109 | SC48617 | 135 | SC80116A | 247 | ST01133SC | 298 |
| SC12111 | 61 | SC22201 | 70 | SC34317T | 109 | SC48618 | 135 | SC80304 | 248 | ST03141ST | 236 |
| SC12201 | 63 | SC22202 | 70 | SC34320T | 109 | SC48619 | 135 | SC80305 | 248 | ST03142 | 236 |
| SC12202 | 63 | SC22203 | 70 | SC34403T | 111 | SC48620 | 135 | SC80306 | 248 | ST03621 | 12 |
| SC12203 | 63 | SC22204 | 70 | SC34404T | 111 | SC48621 | 135 | SC80307 | 248 | ST03901ME | 191 |
| SC12204 | 63 | SC22205 | 70 | SC34405T | 111 | SC48622 | 135 | SC80308 | 248 | ST04110SC | 36 |
| SC12205 | 63 | SC22206 | 70 | SC34406T | 111 | SC49201 | 136 | SC80310 | 248 | ST06001SJ | 35 |
| SC12206 | 63 | SC22207 | 70 | SC34407T | 111 | SC49203 | 136 | SC80312 | 248 | ST06002 | 35 |
| SC12207 | 63 | SC22301 | 70 | SC34408T | 111 | SC49204 | 136 | SC80314 | 248 | ST06004 | 35 |
| SC12208 | 63 | SC22302 | 70 | SC34409T | 111 | SC49205 | 136 | SC80316 | 248 | ST06008SJ | 36 |
| SC12209 | 63 | SC22303 | 70 | SC34410T | 111 | SC49208 | 136 | SC81104 | 249 | ST06011 | 36 |
| SC12801 | 101 | SC22401 | 70 | SC34411T | 111 | SC49210 | 136 | SC81105 | 249 | ST08001SJ | 122 |
| SC12802 | 101 | SC22402 | 70 | SC34412T | 111 | SC59211 | 241 | SC81106A | 249 | ST08002SJ | 123 |
| SC12803 | 101 | SC22403 | 70 | SC34414T | 111 | SC59213 | 241 | SC81107A | 249 | ST08004SJ | 131 |
| SC12804 | 101 | SC22501 | 70 | SC34415T | 111 | SC59215 | 241 | SC81108 | 249 | ST08006SJ | 127 |
| SC12807 | 101 | SC22502 | 70 | SC34417T | 111 | SC59216 | 241 | SC81110A | 249 | ST08007ASJ | 147 |
| SC12808 | 101 | SC22503 | 70 | SC34420T | 111 | SC59217 | 241 | SC81111 | 249 | ST08007SJ | 131 |
| SC12809 | 101 | SC22504 | 70 | SC34630 | 114 | SC59218 | 241 | SC81112A | 249 | ST08008SJ | 153 |
| SC12810 | 101 | SC22601 | 70 | SC34631 | 114 | SC59221 | 241 | SC81113A | 249 | ST08010 | 129 |
| SC12811 | 101 | SC22602 | 70 | SC34634 | 114 | SC59222 | 241 | SC81114A | 249 | ST08012 | 131 |
| SC12812 | 101 | SC22603 | 70 | SC34635 | 114 | SC59223 | 241 | SC81116A | 249 | ST08013 | 128 |
| SC12814 | 101 | SC22604 | 70 | SC34636 | 114 | SC59224 | 241 | SC81304 | 250 | ST08014SJ | 128 |
| SC12815 | 101 | SC25101 | 89 | SC34637 | 114 | SC59231 | 242 | SC81305 | 250 | ST08015SJ | 158 |
| SC12816 | 101 | SC25102 SC25103 | 89 | SC34638 SC34640 | 114 | SC59232 | 242 | SC81306 | 250 | ST08016 | 158 |
| SC12817 | 101 | | 89 | | 114 | SC59233 | 242 | SC81307 | 250 | ST08017 ST08018-02 | 127 |
| SC12820 | 101 | SC25104 | 89 | SC47305 | 167 | SC59234 | 242 | SC81308A | 250 | | 123 |
| SC12821 | 101 | SC25106 | 89 | SC47308 | 167 | SC59235 | 242 | SC81310 | 250 | ST08019-02 | 129 |
| SC12822 | 101 | SC25107 SC25108 | 89 89 | SC47309 SC47310 | 167 | SC59236 | 242 | SC81312 | 250 250 | ST08020 ST08023 | 149 |
| SC12823 SC12826 | 101 | SC25108 | 89 | SC47310 SC47312 | 167 167 | SC59237 SC59238 | 242 | SC81314 SC81316 | 250 | ST08028 | 132 23 |
| SC12827 | 101 | SC25109 | 89 | SC47312 | 167 | SC59251 | 242 | SC84321 | 254 | ST08032 | 155 |
| SC12027 | 78 | SC25201 | 89 | SC47313 | 167 | SC59257 | 242 | SC84322 | 254 | ST08032 | 163 |
| SC21101 | 58 | SC25202 | 89 | SC47317 | 167 | SC59254 | 242 | SC84324 | 254 | ST080334E | 23 |
| SC21101 | 58 | SC25204 | 89 | SC47317 | 167 | SC59255 | 242 | SC84329 | 254 | ST08034L | 129 |
| SC21102 | 58 | SC25204 | 89 | SC47313 | 167 | SC59256 | 242 | SC84501 | 255 | ST08041 | 133 |
| SC21107 | 58 | SC25205 | 89 | SC47321 | 167 | SC59257 | 242 | SC84502 | 255 | ST08042 | 155 |
| SC21201 | 58 | SC25200 | 89 | SC47324 | 167 | SC59258 | 242 | SC84503 | 255 | ST080430 | 160 |
| SC21201 | 58 | SC25207 | 89 | SC47325 | 167 | SC59261 | 241 | SC84504 | 255 | ST08044B | 160 |
| SC21202 | 58 | SC25200 | 89 | SC48512 | 134 | SC59262 | 241 | SC84505 | 255 | ST08044U | 155 |
| SC21203 | 58 | SC25203 | 89 | SC48522 | 134 | SC59263 | 241 | SC84506 | 255 | ST09000 | 141 |
| SC21204 SC21205 | 58 | SC25802 | 89 | SC48523 | 134 | SC59415 | 243 | SC84507 | 255 | ST09000 | 49 |
| SC21205 | 58 | SC25803 | 89 | SC48524 | 134 | SC59415 | 243 | SC84508 | 255 | ST090013J | 49 |
| SC21301 | 58 | SC25804 | 89 | SC48525 | 134 | SC59410 SC59417 | 243 | SC84509 | 255 | ST09002SJ | 59 |
| SC21301 | 58 | SC25805 | 89 | SC48526 | 134 | SC59417 SC59421 | 243 | SC84510 | 255 | ST09003SJ | 60 |
| SC21302 | 58 | SC25806 | 89 | SC48527 | 134 | SC59421 SC59422 | 243 | SC84510 | 255 | ST09004SJ | 72 |
| SC21401 | 58 | SC25807 | 89 | SC48528 | 134 | SC59423 | 243 | SC84511 | 255 | ST09003SJ | 75 |
| SC21401 | 58 | SC34204 | 104 | SC48529 | 134 | SC59423 | 243 | SC84512 | 255 | ST090003J | 74 |
| JUL17UL | 58 | SC34204 | 104 | SC48530 | 134 | SC59424 SC59471 | 243 | SC84514 | 255 | ST09007SJ | 105 |

| Article Code | Page No. |
|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|
| ST09009SJ | 105 | ST09088SJ | 75 | ST09401SJ | 292 | ST11109SC | 52 | ST12311SC | 61 | ST12912SC | 68 |
| ST09010SJ | 37 | ST09090SJ | 73 | ST09402SJ | 292 | ST11110SC | 52 | ST12312SC | 61 | ST12913SC | 68 |
| ST09011SJ | 50 | ST09092ME-12 | 73 | ST09405SJ | 293 | ST11301SC | 52 | ST12313SC | 61 | ST12914SC | 68 |
| ST09012SJ | 138 | ST09093 | 123 | ST09406SJ | 293 | ST11302SC | 52 | ST12314SC | 61 | ST12915SC | 64 |
| ST09013SJ | 50 | ST09098SJ | 49 | ST09407SJ | 293 | ST11303SC | 52 | ST12315SC | 61 | ST12916SC | 64 |
| ST09014A | 41 | ST09099 | 38 | ST09502SJ | 38 | ST11304SC | 52 | ST12316SC | 61 | ST12917SC | 68 |
| ST09014SJ | 40 | ST09101ASJ | 247 | ST09505SJ | 39 | ST11305SC | 52 | ST12317SC | 61 | ST12919SC | 64 |
| ST090143J | 90 | ST09101ASJ | | ST09506SJ | 37 | ST11306SC | 52 | ST123173C | 61 | ST129193C | 64 |
| | 124 | ST091012SJ | 247 | ST09508 | 287 | ST113003C | 52 | ST12401SC | 63 | ST129203C | 69 |
| ST09017SJ | | | | | | | | | | | |
| ST09018SJ | 119 | ST09103ASJ | 248 | ST09509 | 288 | ST11308SC | 52 | ST12402SC | 63 | ST12930SC | 68 |
| ST09019SJ | 124 | ST09104SJ | 248 | ST09510L | 41 | ST11309SC | 52 | ST12403SC | 63 | ST12960SC | 65 |
| ST09020SJ | 119 | ST09105ASJ | 249 | ST09510SJ | 43 | ST11310SC | 52 | ST12404SC | 63 | ST12970SC | 66 |
| ST09021SJ | 124 | ST09106SJ | 249 | ST09516SJ | 39 | ST11311SC | 52 | ST12405SC | 63 | ST12971ST | 65 |
| ST09022SJ | 121 | ST09107ASJ | 250 | ST09519SJ | 40 | ST11312SC | 52 | ST12406SC | 63 | ST12972ST | 66 |
| ST09023SJ | 155 | ST09107CHBSJ | 252 | ST09520 | 71 | ST11313SC | 52 | ST12407SC | 63 | ST12974 | 67 |
| ST09024SJ | 147 | ST09108SJ | 250 | ST09521-02 | 48 | ST11314SC | 52 | ST12408SC | 63 | ST12983SC | 83 |
| ST09025SJ | 157 | ST09120SJ | 254 | ST09521L | 48 | ST11401SC | 53 | ST12409SC | 63 | ST12985SC | 87 |
| ST09026SJ | 122 | ST09121SJ | 251 | ST09522 | 48 | ST11402SC | 53 | ST12410SC | 63 | ST13101SC | 76 |
| ST09027SJ | 123 | ST09122SJ | 251 | ST09523 | 59 | ST11403SC | 53 | ST12411SC | 63 | ST13102SC | 76 |
| ST09029SJ | 129 | ST09123SJ | 251 | ST09524 | 59 | ST11404SC | 53 | ST12412SC | 63 | ST13103SC | 76 |
| ST09030 | 119 | ST09124SJ | 245 | ST09525SJ | 71 | ST11405SC | 53 | ST12413SC | 63 | ST13104SC | 76 |
| ST09031SJ | 137 | ST09131SJ | 97 | ST09526 | 72 | ST11406SC | 53 | ST12414SC | 63 | ST13105SC | 76 |
| ST09032 | 137 | ST09132SJ | 97 | ST09528 | 21 | ST11407SC | 53 | ST12415SC | 63 | ST13106SC | 76 |
| ST09033SJ | 135 | ST09134SJ | 97 | ST09531SJ | 287 | ST11408SC | 53 | ST12601BU | 62 | ST13107SC | 76 |
| ST09033U | 137 | ST09137 | 100 | ST09535SJ | 288 | ST11409SC | 53 | ST12602BU | 62 | ST13108SC | 76 |
| ST09034 | 152 | ST09138 | 100 | ST09602SJ | 232 | ST11410SC | 53 | ST12603BU | 62 | ST13109SC | 76 |
| ST09037SJ | 133 | ST09138 | 90 | ST09603SJ | 232 | ST11901SC | 54 | ST12604BU | 62 | ST131105C | 76 |
| | | | | | | | | | | | 76 |
| ST09038SJ | 152 | ST09152SJ | 287 | ST09701 | 254 | ST11903SC | 57 | ST12605BU | 62 | ST13111SC | |
| ST09040-02 | 153 | ST09161SJ | 257 | ST09702 | 255 | ST11904SC | 57 | ST12606BU | 62 | ST13112SC | 76 |
| ST09043SJ | 166 | ST09162SJ | 257 | ST09703SJ | 293 | ST11905ST | 54 | ST12607BU | 62 | ST13113SC | 76 |
| ST09044 | 39 | ST09163SJ | 257 | ST09704ASJ | 302 | ST11906ST | 54 | ST12608BU | 62 | ST13114SC | 76 |
| ST09050SJ | 152 | ST09164SJ | 257 | ST09704SJ | 302 | ST11909SC | 55 | ST12609BU | 62 | ST13115SC | 76 |
| ST09051SJ | 51 | ST09203SJ | 71 | ST09709SJ | 302 | ST11910SC | 55 | ST12610BU | 62 | ST13201SC | 78 |
| ST09052SJ | 51 | ST09204SJ | 72 | ST09715 | 255 | ST11911SC | 56 | ST12611BU | 62 | ST13202SC | 78 |
| ST09053SJ | 51 | ST09251SJ | 184 | ST09901SJ | 19 | ST11912SC | 56 | ST12612BU | 62 | ST13203SC | 78 |
| ST09054 | 38 | ST09261SJ | 173 | ST09902SJ | 19 | ST11913SC | 56 | ST12613BU | 62 | ST13204SC | 78 |
| ST09057-02 | 88 | ST09262U | 35 | ST09903SJ | 20 | ST11914SC | 57 | ST12614BU | 62 | ST13205SC | 78 |
| ST09060-6SJ | 72 | ST09302U | 229 | ST09904-02 | 21 | ST11922SC | 57 | ST12615BU | 62 | ST13206SC | 78 |
| ST09060SJ | 73 | ST09303 | 229 | ST09905 | 21 | ST11924ST | 315 | ST12616BU | 62 | ST13207SC | 78 |
| ST09062-02 | 122 | ST09303ESJ | 221 | ST09906 | 22 | ST11970SC | 54 | ST12701SC | 64 | ST13208SC | 78 |
| ST09063 | 122 | ST09304ESJ | 221 | ST09907 | 22 | ST11974 | 55 | ST12702SC | 64 | ST13209SC | 78 |
| ST09064SJ | 121 | ST09305SJ | 221 | ST09908 | 22 | ST12101SC | 61 | ST12703SC | 64 | ST13210SC | 78 |
| ST09066-02 | 149 | ST09306SJ | 221 | ST09909-02 | 23 | ST12102SC | 61 | ST12704SC | 64 | ST13211SC | 78 |
| ST09068SJ | 124 | ST09309SJ | 225 | ST09910 | 24 | ST12102SC | 61 | ST12705SC | 64 | ST13212SC | 78 |
| ST09069SJ | 125 | ST093033J | 236 | ST09910 | 24 | ST12104SC | 61 | ST127033C | 64 | ST13213SC | 78 |
| | | | | | | | | | | | |
| ST09070SJ | 119 | ST09312SJ | 236 | ST09912SJ | 24 | ST12105SC | 61 | ST12707SC | 64 | ST13301SC | 76 |
| ST09071SJ | 128 | ST09313SJ | 237 | ST09913SJ | 25 | ST12106SC | 61 | ST12708SC | 64 | ST13302SC | 76 |
| ST09072SJ | 131 | ST09314SJ | 237 | ST09914SJ | 25 | ST12107SC | 61 | ST12709SC | 64 | ST13303SC | 76 |
| ST09073SJ | 128 | ST09315SJ | 238 | ST09915SJ | 20 | ST12108SC | 61 | ST12710SC | 64 | ST13304SC | 76 |
| ST09074SJ | 125 | ST09316SJ | 237 | ST09927 | 17 | ST12109SC | 61 | ST12711SC | 64 | ST13305SC | 76 |
| ST09075 | 147 | ST09317SJ | 237 | ST09928 | 19 | ST12110SC | 61 | ST12712SC | 64 | ST13306SC | 76 |
| ST09077SJ | 37 | ST09324SJ | 235 | ST09932A | 25 | ST12301SC | 61 | ST12901SC | 65 | ST13307SC | 76 |
| ST09078SJ | 147 | ST09326SJ | 235 | ST09934 | 20 | ST12302SC | 61 | ST12903SC | 69 | ST13308SC | 76 |
| ST09079SJ | 149 | ST09332SJ | 238 | ST11101SC | 52 | ST12303SC | 61 | ST12904SC | 69 | ST13309SC | 76 |
| ST09080SJ | 160 | ST09333SJ | 238 | ST11102SC | 52 | ST12304SC | 61 | ST12905SC | 69 | ST13310SC | 76 |
| ST09082SJ | 163 | ST09341SJ | 232 | ST11103SC | 52 | ST12305SC | 61 | ST12906SC | 69 | ST13311SC | 76 |
| ST09083SJ | 160 | ST09342SJ | 233 | ST11104SC | 52 | ST12306SC | 61 | ST12907SC | 69 | ST13312SC | 76 |
| ST09084SJ | 168 | ST09342SJ | 233 | ST11105SC | 52 | ST123003C | 61 | ST1290/SC | 69 | ST13313SC | 76 |
| ST09084SJ | 60 | ST09347 | 232 | ST11106SC | 52 | ST12307SC | 61 | ST12900SC | 67 | ST13314SC | 76 |
| | | | | | | | | | | | |
| ST09086SJ | 71 | ST09348 | 233 | ST11107SC | 52 | ST12309SC | 61 | ST12910SC | 67 | ST13315SC | 76 |
| ST09087SJ | 74 | ST09350 | 233 | ST11108SC | 52 | ST12310SC | 61 | ST12911SC | 66 | ST13316SC | 76 |

Article Code Index

| Article Code | Page No. |
|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|
| ST13317SC | 76 | ST13704SC | 81 | ST16310SC | 91 | ST16604SC | 92 | ST24407BU | 87 | ST34202SC | 104 |
| ST13318SC | 76 | ST13705SC | 81 | ST16311SC | 91 | ST16605SC | 92 | ST24408IEC | 80 | ST34203SC | 104 |
| ST13319SC | 76 | ST13706SC | 81 | ST16312SC | 91 | ST16606SC | 92 | ST24410IEC | 80 | ST34205SC | 104 |
| ST13320SC | 76 | ST13707SC | 81 | ST16313SC | 91 | ST16607SC | 92 | ST24801SC | 88 | ST34206SC | 104 |
| ST13321SC | 76 | ST13708SC | 81 | ST16314SC | 91 | ST16608SC | 92 | ST24802SC | 88 | ST34207SC | 104 |
| ST13324 | 76 | ST13810 | 79 | ST16315SC | 91 | ST16609SC | 92 | ST24803SC | 88 | ST34208SC | 104 |
| ST13401SC | 78 | ST13812 | 79 | ST16316SC | 91 | ST16610SC | 92 | ST24804SC | 88 | ST34209SC | 104 |
| ST13402SC | 78 | ST13813 | 79 | ST16317SC | 91 | ST16611SC | 92 | ST24805SC | 88 | ST34211SC | 104 |
| ST13403SC | 78 | ST13814 | 79 | ST16318SC | 91 | ST16612SC | 92 | ST24806SC | 88 | ST34212SC | 104 |
| ST13404SC | 78 | ST13816 | 79 | ST16319SC | 91 | ST16613SC | 92 | ST24807SC | 88 | ST34214SC | 104 |
| ST13405SC | 78 | ST13817 | 79 | ST16320SC | 91 | ST16614SC | 92 | ST25105SC | 89 | ST34303SC | 108 |
| ST13406SC | 78 | ST13818 | 79 | ST16321SC | 91 | ST16615SC | 92 | ST32902 | 103 | ST34304SC | 108 |
| ST13407SC | 78 | ST13819 | 79 | ST16322SC | 91 | ST16616SC | 92 | ST33101SC | 109 | ST34305SC | 108 |
| ST13408SC | 78 | ST13901SC | 82 | ST16323SC | 91 | ST16617SC | 92 | ST33102SC | 109 | ST34306SC | 108 |
| ST13409SC | 78 | ST13904SC | 86 | ST16401SC | 90 | ST16618SC | 92 | ST33103SC | 109 | ST34307SC | 108 |
| ST13410SC | 78 | ST13905SC | 86 | ST16402SC | 90 | ST16619SC | 92 | ST33104SC | 109 | ST34308SC | 108 |
| ST13411SC | 78 | ST13906SC | 86 | ST16403SC | 90 | ST16620SC | 92 | ST33105SC | 109 | ST34309SC | 108 |
| ST13412SC | 78 | ST13907SC | 86 | ST16404SC | 90 | ST16622SC | 92 | ST33106SC | 109 | ST34310SC | 108 |
| ST13413SC | 78 | ST13908SC | 86 | ST16405SC | 90 | ST16623SC | 92 | ST33107SC | 109 | ST34311SC | 108 |
| ST13414SC | 78 | ST13909SC | 84 | ST16406SC | 90 | ST16624SC | 92 | ST33108SC | 109 | ST34312SC | 108 |
| ST13415SC | 78 | ST13910SC | 84 | ST16407SC | 90 | ST16901SC | 93 | ST33109SC | 109 | ST34314SC | 108 |
| ST13416SC | 78 | ST13911SC | 84 | ST16408SC | 91 | ST16902SC | 95 | ST33110SC | 109 | ST34315SC | 108 |
| ST13417SC | 78 | ST13912SC | 85 | ST16409SC | 91 | ST16903SC | 95 | ST33501BU | 113 | ST34316SC | 108 |
| ST13501SC | 77 | ST13913SC | 85 | ST16410SC | 91 | ST16904SC | 95 | ST33502BU | 113 | ST34317SC | 108 |
| ST13502SC | 77 | ST13914SC | 85 | ST16411SC | 91 | ST16905SC | 94 | ST33503BU | 113 | ST34320SC | 109 |
| ST13503SC | 77 | ST13915SC | 80 | ST16412SC | 91 | ST16906SC | 94 | ST33504BU | 113 | ST34322SC | 109 |
| ST13504SC | 77 | ST13916SC | 80 | ST16413SC | 91 | ST16907SC | 95 | ST33505BU | 113 | ST34323SC | 109 |
| ST13505SC | 77 | ST13917SC | 80 | ST16414SC | 91 | ST16908SC | 95 | ST33506BU | 113 | ST34325SC | 109 |
| ST13506SC | 77 | ST13918SC | 80 | ST16415SC | 91 | ST16919SC | 94 | ST33507BU | 113 | ST34397T | 105 |
| ST13507SC | 77 | ST13919SC | 85 | ST16416SC | 91 | ST17001SC | 84 | ST33508BU | 113 | ST34398T | 105 |
| ST13508SC | 77 | ST13930SC | 86 | ST16417SC | 91 | ST21104SC | 58 | ST33509BU | 113 | ST34399T | 107 |
| ST13509SC | 77 | ST13950SC | 85 | ST16418SC | 91 | ST21105SC | 58 | ST33510BU | 113 | ST34403SC | 110 |
| ST13510SC | 77 | ST13951SC | 84 | ST16419SC | 91 | ST21106 | 58 | ST33511BU | 113 | ST34404SC | 110 |
| ST13511SC | 77 | ST13960SC | 81 | ST16420SC | 91 | ST21108BU | 58 | ST33512BU | 113 | ST34405SC | 110 |
| ST13512SC | 77 | ST13970SC | 82 | ST16421SC | 91 | ST24101SC | 88 | ST33513BU | 113 | ST34406SC | 110 |
| ST13513SC | 77 | ST13971ST | 82 | ST16422SC | 91 | ST24102SC | 88 | ST33514BU | 113 | ST34407SC | 110 |
| ST13514SC | 77 | ST13972ST | 82 | ST16501SC | 93 | ST24103SC | 88 | ST33515BU | 113 | ST34408SC | 110 |
| ST13515SC | 77 | ST13974 | 83 | ST16502SC | 93 | ST24104SC | 88 | ST33801BU | 115 | ST34409SC | 110 |
| ST13601SC | 77 | ST13975 | 48 | ST16503SC | 93 | ST24105SC | 88 | ST33802BU | 115 | ST34410SC | 110 |
| ST13602SC | 77 | ST13992BU | 83 | ST16504SC | 93 | ST24106SC | 88 | ST33803BU | 115 | ST34411SC | 110 |
| ST13603SC | 77 | ST14010SC | 79 | ST16505SC | 93 | ST24107SC | 88 | ST33804BU | 116 | ST34412SC | 110 |
| ST13604SC | 77 | ST14011SC | 79 | ST16506SC | 93 | ST24108SC | 88 | ST33805BU | 116 | ST34414SC | 110 |
| ST13605SC | 77 | ST14012SC | 79 | ST16507SC | 93 | ST24109SC | 88 | ST33806BU | 116 | ST34415SC | 110 |
| ST13606SC | 77 | ST14013SC | 79 | ST16508SC | 93 | ST24201SC | 87 | ST33807BU | 116 | ST34417SC | 110 |
| ST13607SC | 77 | ST14014SC | 79 | ST16509SC | 93 | ST24202SC | 87 | ST33808BU | 116 | ST34419SC | 110 |
| ST13608SC | 77 | ST14016SC | 79 | ST16510SC | 93 | ST24203SC | 87 | ST33809BU | 116 | ST34420SC | 110 |
| ST13609SC | 77 | ST14017SC | 79 | ST16511SC | 93 | ST24204SC | 87 | ST33810BU | 116 | ST34422SC | 110 |
| ST13610SC | 77 | ST14018SC | 79 | ST16512SC | 93 | ST24205SC | 87 | ST33811BU | 116 | ST34423SC | 110 |
| ST13611SC | 77 | ST14019SC | 79 | ST16513SC | 93 | ST24206SC | 87 | ST33812BU | 116 | ST34425SC | 110 |
| ST13612SC | 77 | ST14021SC | 79 | ST16514SC | 93 | ST24207SC | 87 | ST33813BU | 116 | ST34505SC | 112 |
| ST13613SC | 77 | ST14022SC | 79 | ST16515SC | 93 | ST24208SC | 87 | ST33814BU | 116 | ST34506SC | 112 |
| ST13614SC | 77 | ST14024SC | 79 | ST16516SC | 93 | ST24209SC | 87 | ST33815BU | 116 | ST34507SC | 112 |
| ST13615SC | 77 | ST16301SC | 91 | ST16517SC | 93 | ST24401BU | 87 | ST33816BU | 116 | ST34508SC | 113 |
| ST13616SC | 77 | ST16302SC | 91 | ST16518SC | 93 | ST24402BU | 87 | ST33817BU | 116 | ST34509SC | 113 |
| ST13617SC | 77 | ST16303SC | 91 | ST16519SC | 93 | ST24403BU | 87 | ST33818BU | 116 | ST34510SC | 113 |
| ST13618SC | 77 | ST16304SC | 91 | ST16520SC | 93 | ST24404BU | 87 | ST33819BU | 116 | ST34511SC | 113 |
| ST13619SC | 77 | ST16305SC | 91 | ST16521SC | 93 | ST24404IEC | 80 | ST33820BU | 116 | ST34512SC | 113 |
| ST13620SC | 77 | ST16306SC | 91 | ST16522SC | 93 | ST24405BU | 87 | ST33821BU | 116 | ST34513SC | 113 |
| ST13701SC | 81 | ST16307SC | 91 | ST16523SC | 93 | ST24405IEC | 80 | ST33822BU | 116 | ST34514SC | 113 |
| ST13702SC | 81 | ST16308SC | 91 | ST16602SC | 92 | ST24406BU | 87 | ST33911SC | 108 | ST34515SC | 113 |
| ST13703SC | 81 | ST16309SC | 91 | ST16603SC | 92 | ST24406IEC | 80 | ST34201BU | 104 | ST34516SC | 113 |

| Article Code | Page No. | Article Code | Page No. |
|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|--------------------|-------------|
| ST34517SC | 113 | ST34831SC | 115 | ST40204SC | 126 | ST41207SC | 130 | ST42214SC | 132 | ST43207ST | 156 |
| ST34518SC | 113 | ST34832SC | 115 | ST40205SC | 126 | ST41208SC | 130 | ST42215SC | 132 | ST43208ST | 156 |
| ST34519SC | 113 | ST34833SC | 115 | ST40206SC | 126 | ST41209SC | 130 | ST42216SC | 132 | ST43209ST | 156 |
| ST34520SC | 113 | ST34834SC | 115 | ST40207SC | 126 | ST41210SC | 130 | ST42217SC | 132 | ST43210ST | 156 |
| ST34521SC | 113 | ST34835SC | 115 | ST40208SC | 126 | ST41211SC | 130 | ST42218SC | 132 | ST43211ST | 156 |
| ST34522SC | 113 | ST34836SC | 115 | ST40209SC | 126 | ST41212SC | 130 | ST42219SC | 132 | ST43212ST | 156 |
| ST34523SC | 113 | ST34837SC | 115 | ST40210SC | 126 | ST41213SC | 130 | ST42220SC | 132 | ST43213ST | 156 |
| ST34524SC | 113 | ST34838SC | 115 | ST40211SC | 126 | ST41214SC | 130 | ST42221SC | 132 | ST43214ST | 156 |
| ST34525SC | 113 | ST34839SC | 115 | ST40212SC | 126 | ST41215SC | 130 | ST42222SC | 132 | ST43215ST | 156 |
| ST34526SC | 113 | ST34840SC | 115 | ST40213SC | 126 | ST41216SC | 130 | ST42223SC | 132 | ST43216ST | 156 |
| ST34527SC | 113 | ST34841SC | 115 | ST40214SC | 126 | ST41217SC | 130 | ST42224SC | 132 | ST43217ST | 156 |
| ST34528SC | 113 | ST34842SC | 115 | ST40215SC | 126 | ST41218SC | 130 | ST42225SC | 132 | ST43218ST | 156 |
| ST34529SC | 113 | ST34843SC | 115 | ST40216SC | 126 | ST41219SC | 130 | ST42301 | 133 | ST43219ST | 156 |
| ST34530 | 113 | ST34844SC | 115 | ST40217SC | 126 | ST41220SC | 130 | ST42302 | 133 | ST43220ST | 156 |
| ST34605SC | 114 | ST34845SC | 115 | ST40218SC | 126 | ST41221SC | 130 | ST42303 | 133 | ST43221ST | 156 |
| ST34606SC | 114 | ST34846SC | 115 | ST40219SC | 126 | ST41222SC | 130 | ST42304 | 133 | ST43222ST | 156 |
| ST34607SC | 114 | ST34847SC | 115 | ST40220SC | 126 | ST41223SC | 130 | ST42305 | 133 | ST43501 | 150 |
| ST34608SC | 114 | ST34848SC | 115 | ST40221SC | 126 | ST41225ST | 130 | ST42306 | 133 | ST43502 | 150 |
| ST34609SC | 114 | ST34849SC | 115 | ST40222SC | 126 | ST41226 | 130 | ST42307 | 133 | ST43503 | 150 |
| ST34610SC | 114 | ST34850SC | 115 | ST40223SC | 126 | ST41227ST | 130 | ST42309 | 133 | ST43504 | 150 |
| ST34611SC | 114 | ST34851SC | 115 | ST40233SC | 126 | ST41301SC | 130 | ST42310 | 133 | ST43505 | 150 |
| ST34612SC | 114 | ST34852SC | 115 | ST40235SC | 126 | ST41302SC | 130 | ST42312 | 133 | ST43506 | 150 |
| ST34613SC | 114 | ST34853SC | 115 | ST40236SC | 126 | ST41303SC | 130 | ST42315 | 133 | ST43508 | 150 |
| ST34614SC | 114 | ST34924SC | 116 | ST40237SC | 126 | ST41304SC | 130 | ST42406SC | 140 | ST43511 | 150 |
| ST34615SC | 114 | ST34925SC | 116 | ST40241SC | 126 | ST41305SC | 130 | ST42407SC | 140 | ST43512 | 150 |
| ST34616SC | 114 | ST34926SC | 116 | ST40242SC | 126 | ST41306SC | 139 | ST42408SC | 140 | ST43601 | 150 |
| ST34617SC | 114 | ST34928SC | 116 | ST40243SC | 126 | ST41307SC | 139 | ST42409SC | 140 | ST43602 | 150 |
| ST34618SC | 114 | ST34929SC | 116 | ST40244SC | 126 | ST41308SC | 139 | ST42410SC | 140 | ST43603 | 150 |
| ST34619SC | 114 | ST34930SC | 116 | ST40245SC | 126 | ST41309SC | 139 | ST42411SC | 140 | ST43604 | 150 |
| ST34620SC ST34621SC | 114 | ST34931SC ST34934SC | 116 116 | ST40246SC ST40248SC | 126 126 | ST41310SC ST41311SC | 139 139 | ST42412SC ST42413SC | 140 | ST43605 ST43606 | 150 150 |
| ST34622SC | 114 | ST34934SC | 116 | ST40248SC ST40249SC | 126 | ST413113C | 139 | ST42413SC ST42414SC | 140 140 | ST43607 | 150 |
| ST34623SC | 114 | ST349373C | 116 | ST402493C | 126 | ST413123C | 139 | ST424143C | 140 | ST43608 | 150 |
| ST34624SC | 114 | ST34940SC | 116 | ST40250SC | 126 | ST41313SC | 139 | ST42416SC | 140 | ST43609 | 150 |
| ST34625SC | 114 | ST40101SC | 126 | ST402513C | 126 | ST41315SC | 139 | ST424103C | 140 | ST43610 | 150 |
| ST34626SC | 114 | ST401013C | 126 | ST402323C | 127 | ST41316SC | 139 | ST4241/3C | 140 | ST43611 | 150 |
| ST34628SC | 114 | ST40102SC | 126 | ST402813C | 127 | ST41317SC | 139 | ST42419SC | 140 | ST43612 | 150 |
| ST34629SC | 114 | ST40104SC | 126 | ST40283SC | 127 | ST41318SC | 139 | ST424133C | 140 | ST43613 | 150 |
| ST34701SC | 104 | ST40105SC | 126 | ST40284SC | 127 | ST41319SC | 139 | ST42422SC | 140 | ST43614 | 150 |
| ST34702SC | 104 | ST40106SC | 126 | ST40285SC | 127 | ST41321SC | 139 | ST42424SC | 140 | ST43615 | 150 |
| ST34703SC | 108 | ST40107SC | 126 | ST40286SC | 127 | ST41322SC | 139 | ST43101ST | 156 | ST43616 | 150 |
| ST34704SC | 108 | ST40108SC | 126 | ST40287SC | 127 | ST41324SC | 139 | ST43102ST | 156 | ST43617 | 150 |
| ST34705SC | 108 | ST40109SC | 126 | ST40288SC | 127 | ST42101SC | 132 | ST43103ST | 157 | ST43618 | 150 |
| ST34706SC | 108 | ST40110SC | 126 | ST40289SC | 127 | ST42102SC | 132 | ST43104ST | 157 | ST43619 | 150 |
| ST34708SC | 112 | ST40111SC | 126 | ST40290SC | 127 | ST42104SC | 132 | ST43105ST | 157 | ST45201SC | 138 |
| ST34712SC | 112 | ST40112SC | 126 | ST40291SC | 127 | ST42105SC | 132 | ST43106ST | 157 | ST45202SC | 138 |
| ST34714SC | 103 | ST40113SC | 126 | ST40292SC | 127 | ST42106SC | 132 | ST43107ST | 157 | ST45203SC | 138 |
| ST34715SC | 103 | ST40114SC | 126 | ST41101SC | 130 | ST42107SC | 132 | ST43108ST | 157 | ST45204SC | 138 |
| ST34716SC | 107 | ST40115SC | 126 | ST41102SC | 130 | ST42201SC | 132 | ST43109ST | 157 | ST46135U | 157 |
| ST34717SC | 107 | ST40116SC | 126 | ST41103SC | 130 | ST42202SC | 132 | ST43110ST | 157 | ST46200ST | 158 |
| ST34718SC | 111 | ST40117SC | 126 | ST41104SC | 130 | ST42203SC | 132 | ST43111ST | 157 | ST46201ST | 158 |
| ST34719SC | 107 | ST40118SC | 126 | ST41105SC | 130 | ST42204SC | 132 | ST43112ST | 157 | ST46202ST | 158 |
| ST34720SC | 112 | ST40119SC | 126 | ST41106SC | 130 | ST42205SC | 132 | ST43113ST | 157 | ST46203ST | 158 |
| ST34721SC | 111 | ST40120SC | 126 | ST41107SC | 130 | ST42206SC | 132 | ST43114ST | 157 | ST46204ST | 158 |
| ST34824SC | 115 | ST40121SC | 126 | ST41108SC | 130 | ST42207SC | 132 | ST43115ST | 157 | ST46205ST | 158 |
| ST34825SC | 115 | ST40122SC | 126 | ST41201SC | 130 | ST42208SC | 132 | ST43201ST | 156 | ST46206ST | 158 |
| ST34826SC | 115 | ST40123SC | 126 | ST41202SC | 130 | ST42209SC | 132 | ST43202ST | 156 | ST46301 | 159 |
| ST34827SC | 115 | ST40124SC | 126 | ST41203SC | 130 | ST42210SC | 132 | ST43203ST | 156 | ST46302 | 159 |
| ST34828SC | 115 | ST40201SC | 126 | ST41204SC | 130 | ST42211SC | 132 | ST43204ST | 156 | ST46303ST | 159 |
| ST34829SC | 115 | ST40202SC | 126 | ST41205SC | 130 | ST42212SC | 132 | ST43205ST | 156 | ST46304ST | 159 |
| ST34830SC | 115 | ST40203SC | 126 | ST41206SC | 130 | ST42213SC | 132 | ST43206ST | 156 | ST46305ST | 159 |

Article Code Index

| Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. | Article Code | Page No. |
|------------------------|-------------|--------------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|-------------|
| ST46306ST | 159 | ST46673BU | 162 | ST47503ST | 134 | ST61104SC | 224 | ST62310SC | 223 | ST70141ST | 178 |
| ST46307ST | 159 | ST46674BU | 162 | ST47504ST | 134 | ST61105SC | 224 | ST62311SC | 223 | ST70201AST | 175 |
| ST46308ST | 159 | ST46675BU | 162 | ST47505ST | 134 | ST61106SC | 224 | ST62312SC | 223 | ST70202AST | 175 |
| ST46309 | 159 | ST46676BU | 162 | ST47506ST | 134 | ST61107SC | 224 | ST62313SC | 223 | ST70203AST | 175 |
| ST46310ST | 159 | ST46677BU | 163 | ST47507ST | 134 | ST61108SC | 224 | ST62314SC | 223 | ST70232ST | 175 |
| ST46311 | 159 | ST46678BU | 163 | ST47509ST | 134 | ST61211SC | 231 | ST62315SC | 223 | ST70233ST | 175 |
| ST46312ST | 159 | ST46679BU | 163 | ST47530 | 152 | ST61212SC | 231 | ST62316SC | 223 | ST70301AST | 176 |
| ST46322 | 159 | ST46680BU | 163 | ST47701SC | 136 | ST61213SC | 231 | ST62317SC | 223 | ST70302AST | 176 |
| ST46323 | 159 | ST46681BU | 163 | ST47702SC | 136 | ST61214SC | 231 | ST62501ST | 310 | ST70303AST | 176 |
| ST46324 | 159 | ST46682BU | 163 | ST47703SC | 136 | ST61221SC | 230 | ST62502ST | 310 | ST70331ST | 176 |
| ST46325 | 159 | ST46683BU | 163 | ST47704SC | 136 | ST61222SC | 230 | ST62503ST | 311 | ST70332ST | 176 |
| ST46326 | 159 | ST46801ST | 166 | ST47705SC | 136 | ST61223SC | 230 | ST62601ST | 311 | ST70333ST | 176 |
| ST46327 | 159 | ST46802ST | 166 | ST47706SC | 136 | ST61224SC | 230 | ST62709 | 284 | ST70411ST | 179 |
| ST46328 | 159 | ST46803ST | 166 | ST47707SC | 136 | ST61311SC | 231 | ST62712 | 284 | ST70412ST | 179 |
| ST46401ST | 165 | ST46804ST | 166 | ST47710SC | 136 | ST61312SC | 231 | ST62713 | 284 | ST70413ST | 179 |
| ST46402ST | 165 | ST46805ST | 166 | ST47712SC | 136 | ST61313SC | 231 | ST63402SC | 226 | ST70414ST | 179 |
| ST46403ST | 165 | ST46806ST | 166 | ST48101ST | 301 | ST61314SC | 231 | ST63403SC | 226 | ST70511ST | 179 |
| ST46404ST | 165 | ST46807ST | 166 | ST48200SC | 137 | ST61315SC | 231 | ST63404SC | 226 | ST70512ST | 179 |
| ST46405ST | 165 | ST46808ST | 166 | ST48201SC | 137 | ST61321SC | 230 | ST63405SC | 226 | ST70601ME | 179 |
| ST46406ST | 165 | ST46809ST | 166 | ST48202SC | 137 | ST61322SC | 230 | ST63407SC | 226 | ST70602ME | 179 |
| ST46407ST | 165 | ST46810ST | 166 | ST48203SC | 137 | ST61323SC | 230 | ST63408SC | 226 | ST70611AST | 176 |
| ST46408ST | 165 | ST46811ST | 166 | ST48204SC | 137 | ST61324SC | 230 | ST63409SC | 226 | ST70612AST | 177 |
| ST46409ST | 165 | ST46812ST | 167 | ST48301SC | 137 | ST61325SC | 230 | ST63410SC | 226 | ST70613AST | 177 |
| ST46410ST | 165 | ST46813ST | 167 | ST48302SC | 137 | ST61503SC | 224 | ST63411SC | 226 | ST70614AST | 177 |
| ST46412 | 165 | ST46814ST | 167 | ST48303SC | 137 | ST61504SC | 224 | ST63412SC | 226 | ST70615AST | 178 |
| ST46413ST | 165 | ST46815ST | 167 | ST48505 | 134 | ST61505SC | 224 | ST63413SC | 226 | ST70616AST | 178 |
| ST46414 | 165 | ST46816ST | 167 | ST48506 | 134 | ST61506SC | 224 | ST63414SC | 226 | ST70621ME | 181 |
| ST46415 | 165 | ST46817ST | 167 | ST48507 | 134 | ST61507SC | 224 | ST63415SC | 226 | ST70622ME | 181 |
| ST46421 | 165 | ST46902 | 167 | ST48509 | 134 | ST61508SC | 224 | ST63416SC | 226 | ST70642ST | 181 |
| ST46422 | 165 | ST46904 | 167 | ST48515 | 134 | ST61603SC | 228 | ST63417SC | 226 | ST70711ST | 180 |
| ST46471BU | 165 | ST46905 | 167 | ST48516 | 134 | ST61605SC | 228 | ST63502SC | 227 | ST70721ST | 180 |
| ST46473BU | 165 | ST46906 | 167 | ST48517 | 134 | ST61606SC | 228 | ST63503SC | 227 | ST70812ST | 145 |
| ST46476BU | 165 | ST46909 | 167 | ST48519 | 134 | ST61607SC | 228 | ST63504SC | 227 | ST70813ST | 145 |
| ST46477BU | 165 | ST46911 | 167 | ST48520 | 134 | ST61608SC | 228 | ST63505SC | 227 | ST70814ST | 145 |
| ST46478BU | 165 | ST46912 | 167 | ST48521 | 134 | ST61703SC | 229 | ST63507SC | 227 | ST70815ST | 145 |
| ST46479BU | 165 | ST47101SC | 141 | ST49202BU | 136 | ST61705SC | 229 | ST63508SC | 227 | ST70816ST | 145 |
| ST46480BU | 165 | ST47102SC | 141 | ST50402 | 191 | ST61706SC | 229 | ST63509SC | 227 | ST70817ST | 145 |
| ST46481BU | 165 | ST47103SC | 141 | ST53301 | 218 | ST61707SC | 229 | ST63510SC | 227 | ST70818ST | 145 |
| ST46482BU ST46601ST | 165 | ST47104SC | 141 | ST53302 | 218 | ST61708SC | 229 | ST63511SC | 227 | ST70819ST | 145 |
| | 162 | ST47122 | 144 | ST53303 | 218 | ST62202SC | 222 | ST63512SC | 227 | ST70841SC | 316 |
| ST46602ST | 162 | ST47123 ST47124 | 144 | ST53304 | 218 | ST62203SC | 222 | ST63513SC | 227 | ST70842SC | 316 |
| ST46603ST | 162 | | 144 | ST53305 | 218 | ST62204SC | 222 | ST63514SC | 227 | ST70843SC | 316 |
| ST46604ST | 162 | ST47125 | 144 | ST53306 | 218 | ST62205SC | 222 | ST63515SC | 227 | ST70845SC | 316 |
| ST46605ST | 162 | ST47130 | 143 | ST53307 | 218 | ST62207SC | 222 | ST63516SC | 227 | ST71002 | 182 |
| ST46606ST | 162 | ST47201SC | 143 | ST53308 | 218 | ST62208SC | 222 | ST63517SC | 227 | ST71101ST | 182 |
| ST46607ST | 162 | ST47202SC | 143 | ST53309 | 218 | ST62209SC | 222 | ST64101 | 315 | ST71102ST | 182 |
| ST46608ST | 162 | ST47203SC | 143 | ST53310 | 218 | ST62210SC | 222 | ST64102ST | 315 | ST71103ST | 182 |
| ST46609ST | 162 | ST47204SC | 143 | ST53311 | 218 | ST62211SC | 222 | ST64103 | 315 | ST71202ST | 182 |
| ST46610ST | 162 | ST47205SC | 143 | ST53312 | 218 | ST62212SC | 222 | ST64104 | 315 | ST71203ST | 182 |
| ST46611ST | 162 | ST47206SC | 143 | ST53313 | 218 | ST62213SC | 222 | ST66202SC | 228 | ST71301ST | 183 |
| ST46612ST | 162 | ST47207SC | 143 | ST53314 | 218 | ST62214SC | 222 | ST66203SC | 228 | ST71302ST | 183 |
| ST46613 | 162 | ST47208SC | 143 | ST53401 | 218 | ST62215SC | 222 | ST66204SC | 228 | ST71401SC | 183 |
| ST46614 | 162 | ST47221SC | 144 | ST53402 | 218 | ST62216SC | 222 | ST66205SC | 228 | ST71501SC | 183 |
| ST46615 | 162 | ST47222SC | 144 | ST59271ST | 240 | ST62217SC | 222 | ST66206SC | 228 | ST71601SC | 184 |
| ST46616 | 162 | ST47223SC | 144 | ST59272ST | 240 | ST62302SC | 223 | ST70001U | 173 | ST71701SC | 184 |
| ST46617 | 162 | ST47224SC | 144 | ST59273ST | 240 | ST62303SC | 223 | ST70002U | 173 | ST72001ST | 185 |
| ST46654ST | 169 | ST47225SC | 144 | ST59274 | 240 | ST62304SC | 223 | ST70003U | 180 | ST72002ST | 185 |
| ST46655ST | 169 | ST47226SC | 144 | ST61002SC | 225 | ST62305SC | 223 | ST70101AST | 174 | ST72004ST | 185 |
| ST46656ST | 169 | ST47403 | 168 | ST61101SC | 224 | ST62307SC | 223 | ST70102AST | 174 | ST72005ST | 185 |
| ST46671BU | 162 | ST47501ST | 134 | ST61102SC | 224 | ST62308SC | 223 | ST70131ST | 174 | ST72011ST | 186 |
| ST46672BU | 162 | ST47502ST | 134 | ST61103SC | 224 | ST62309SC | 223 | ST70132ST | 174 | ST72012ST | 186 |

| Article Code | Page No. | Article Code |
|-----------------|-------------|-----------------|
| ST72013ST | 186 | ST90628S |
| ST72014ST | 186 | ST90633S |
| ST72021ST | 186 | ST90634S |
| ST72022ST | 186 | ST90636S |
| ST72023ST | 186 | ST906385 |
| ST72024ST | 186 | ST90640 |
| ST72031ST | | |
| | 186 | ST90642 |
| ST72032ST | 186 | ST90651S |
| ST72033ST | 186 | ST90652S |
| ST72034ST | 186 | ST90658S |
| ST72041ST | 187 | ST90662S |
| ST72042ST | 187 | ST90665 |
| ST72043ST | 187 | ST90762S |
| ST72044ST | 187 | ST90772S |
| ST72302B-02 | 175 | ST90786S |
| ST72401 | 174 | ST91101 |
| ST72501ST | 181 | ST91102S |
| ST72502ST | 181 | ST91104S |
| ST72503ST | 181 | ST91105S |
| ST72511 | 215 | ST91106S |
| ST83105SC | 251 | ST911003 |
| | | ST91107S |
| ST83106SC | 251 | |
| ST83107SC | 251 | ST91201S |
| ST83108SC | 251 | ST91202S |
| ST83110SC | 251 | ST91212S |
| ST83112SC | 251 | ST91213S |
| ST83113SC | 251 | ST91311E |
| ST83114SC | 251 | ST91312E |
| ST83116SC | 251 | ST91312M |
| ST83305SC | 252 | ST91314M |
| ST83306SC | 252 | ST91315E |
| ST83307SC | 252 | ST91316E |
| ST83308SC | 252 | ST91316M |
| ST83310SC | 252 | ST91317E |
| ST83312SC | 252 | ST91317M |
| ST83313SC | 252 | ST91318E |
| ST83314SC | 252 | |
| | | ST91322E |
| ST83316SC | 252 | ST91323E |
| ST84318SC | 254 | ST91333M |
| ST84320SC | 254 | ST91335M |
| ST84323SC | 254 | ST91336M |
| ST84325SC | 254 | ST91361M |
| ST84328 | 254 | ST91362M |
| ST90433ST | 316 | ST91363M |
| ST90434ST | 316 | ST91401 |
| ST90435ST | 316 | ST91402 |
| ST90436ST | 316 | ST91403 |
| ST90501SC | 309 | ST91404 |
| ST90502 | 309 | ST91410M |
| ST90504 | 309 | ST91411M |
| ST90606 | 268 | ST91412M |
| ST90607 | 268 | ST91413M |
| ST90608 | 270 | ST91421M |
| | | |
| ST90609 | 272 | ST91430M |
| ST90610 | 272 | ST91431M |
| ST90613 | 271 | ST91432M |
| ST90614 | 271 | ST91501S |
| ST90620 | 270 | ST91502S |
| ST90623SC | 303 | ST91503S |
| ST90624SC | 303 | ST91511S0 |
| ST90626SC | 303 | ST91512S0 |
| | | |

| Article Code | Page No. | Article Code | Page No. |
|------------------------|-------------|-----------------|-------------|
| ST90628SC | 303 | ST91513 | 280 |
| ST90633SC | 303 | ST91521SC | 280 |
| ST90634SC | 303 | ST91522SC | 280 |
| ST90636SC | 303 | ST91531SC | 281 |
| ST90638SC | 303 | ST91532SC | 281 |
| ST90640 | 303 | ST91533SC | 281 |
| ST90642 | 303 | ST91601ME | 281 |
| ST90651SC | 304 | ST91602ME | 281 |
| ST90652SC | 305 | ST91603ME | 281 |
| ST90658ST | 304 | ST91604ME | 281 |
| ST90662SC | 304 | ST91605ME | 281 |
| ST90665 | 305 | ST91606ME | 281 |
| ST90762SC | 258 | ST91611ME | 282 |
| ST90772SC | 258 | ST91612ME | 282 |
| ST90786SC | 258 | ST91613ME | 282 |
| ST91101 | 188 | ST91614ME | 282 |
| ST91102ST | 188 | ST91615ME | 282 |
| ST91104ST | 188 | ST91616 | 282 |
| ST91105ST | 189 | ST91621ME | 282 |
| ST91106ST | 189 | ST92101SC | 259 |
| ST91107ST | 189 | ST92102SC | 259 |
| ST91108ST | 192 | ST92103SC | 259 |
| ST91201ST | 192 | ST92104SC | 259 |
| ST91202ST | 192 | ST92105SC | 259 |
| ST91212ST | 192 | ST92106SC | 259 |
| ST91213ST | 192 | ST92107SC | 305 |
| ST91311E | 275 | ST92203SC | 306 |
| ST91312E | 275 | ST92205SC | 306 |
| ST91312ME | 275 | ST92207SC | 306 |
| ST91314ME | 275 | ST92209SC | 306 |
| ST91315E | 275 | ST92301 | 260 |
| ST91316E | 275 | ST92302SC | 260 |
| ST91316ME | 275 | ST92303SC | 260 |
| ST91317E | 275 | ST92304SC | 260 |
| ST91317ME | 275 | ST92305 | 260 |
| ST91318E | 275 | ST92306SC | 261 |
| ST91322E | 275 | ST92307SC | 261 |
| ST91323E | 275 | ST92308 | 261 |
| ST91333ME | 277 | ST92312SC | 260 |
| ST91335ME | 277 | ST92313SC | 260 |
| ST91336ME | 277 | ST92314SC | 260 |
| ST91361ME | 277 | ST92315 | 260 |
| ST91362ME | 277 | ST92322SC | 261 |
| ST91363ME | 277 | ST92323SC | 261 |
| ST91401 | 282 | ST92324SC | 261 |
| ST91402 | 282 | ST92401SC | 262 |
| ST91403 | 282 | ST92402SC | 262 |
| ST91404 | 282 | ST92403SC | 262 |
| ST91410ME | 278 | ST92404SC | 262 |
| ST91411ME | 278 | ST92405SC | 262 |
| ST91412ME | 278 | ST92406SC | 262 |
| ST91413ME | 278 | ST92501 | 262 |
| ST91421ME | 278 | ST92502SC | 262 |
| ST91430ME | 278 | ST92503SC | 262 |
| ST91430ME | 278 | ST92504SC | 262 |
| ST91431ME ST91432ME | | | |
| | 278 | ST92505 | 262 |
| ST91501SC | 280 | ST92521SC | 263 |
| ST91502SC | 280 | ST92522SC | 263 |
| ST91503SC | 280 | ST92523SC | 263 |
| ST91511SC | 280 | ST92524SC | 263 |
| ST91512SC | 280 | ST92525SC | 263 |

| Article Code | Page No. | |
|---------------------|-------------|---|
| ST92531SC | 263 | |
| ST92532SC | 263 | r |
| ST92533SC | 263 | |
| ST92534SC | 263 | H |
| | | |
| ST92535SC | 263 | |
| ST92568 | 313 | |
| ST92569 | 313 | |
| ST92901SC | 264 | L |
| ST92902SC | 264 | |
| ST92903SC | 264 | |
| ST92904SC | 264 | |
| ST92912ME | 264 | |
| ST92913ME | 264 | |
| ST93101ST | 193 | |
| ST93102ST | 193 | |
| ST93102ST | 193 | - |
| | | |
| ST93104ST | 193 | - |
| ST93105 | 199 | |
| ST93106 | 198 | - |
| ST93107 | 199 | |
| ST93108 | 201 | |
| ST93109 | 200 | |
| ST93110 | 200 | |
| ST93121 | 198 | |
| ST93122 | 197 | r |
| ST93125 | 196 | r |
| ST93126 | 197 | |
| ST93127 | 194 | H |
| | 194 | H |
| ST93128 | - | |
| ST93129 | 196 | |
| ST93201 | 201 | |
| ST93202 | 201 | |
| ST93203 | 201 | L |
| ST93204 | 201 | |
| ST93302ST | 202 | |
| ST93303ST | 202 | |
| ST93304ST | 202 | |
| ST93305ST | 202 | Г |
| ST93306ST | 202 | |
| ST93404 | 215 | |
| ST93404ME | 217 | |
| ST93405ME | 217 | |
| ST93405SC | 216 | |
| | | |
| ST93406ME | 217 | - |
| ST93411 | 216 | L |
| ST93413 | 216 | |
| ST93416 | 217 | L |
| ST93417 | 217 | L |
| ST93418 | 217 | |
| ST93422A | 206 | |
| ST93424A | 204 | |
| ST93425A | 205 | |
| ST93426SC | 205 | |
| ST93428SC | 206 | |
| ST93429 | 206 | |
| ST93429 ST93432A | | |
| | 211 | |
| ST93433A | 210 | |
| ST93434A | 211 | _ |
| ST93435A | 212 | |
| ST93436 | 210 | |
| CT07/177 | 211 | |

ST93437

211

| Article Code | Page No. |
|-----------------|-------------|
| ST93438 | 210 |
| ST93441SC | 208 |
| ST93442SC | 208 |
| | |
| ST93443SC | 209 |
| ST93446SC | 209 |
| ST93470SC | 213 |
| ST93473 | 212 |
| ST93474 | 212 |
| ST93481 | 207 |
| ST93482 | 207 |
| ST93483 | 207 |
| | |
| ST93485 | 209 |
| ST93486 | 208 |
| ST93501SC | 202 |
| ST93502ST | 203 |
| ST93503ST | 203 |
| ST93504ST | 203 |
| ST93505ST | 203 |
| ST93506ST | 203 |
| | |
| ST93507ST | 203 |
| ST93508ST | 203 |
| ST93509ST | 203 |
| ST93601 | 203 |
| ST93603 | 204 |
| ST93621ME | 218 |
| ST93622ME | 218 |
| | |
| ST93623ME | 218 |
| ST93624ME | 218 |
| ST93625ME | 218 |
| ST95101SC | 10 |
| ST95102SC | 11 |
| ST95103ASC | 11 |
| ST95104ASC | 10 |
| ST95107SC | 17 |
| | |
| ST95108SC | 14 |
| ST95109SC | 17 |
| ST95111SC | 16 |
| ST95115SC | 11 |
| ST95118SC | 15 |
| ST95119SC | 15 |
| ST95121 | 16 |
| | |
| ST95125 | 15 |
| ST95126 | 16 |
| ST95161SC | 11 |
| ST95162SC | 11 |
| ST95164SC | 12 |
| ST95181 | 12 |
| ST95182SC | 12 |
| | |
| ST95184SC | 13 |
| ST95188 | 13 |
| ST95198SC | 13 |
| ST95201ST | 313 |
| ST95207S | 32 |
| ST95208S | 31 |
| ST95211 | 14 |
| | |
| ST95213SC | 14 |
| ST95400 | 51 |
| ST95401 | 51 |
| ST95410 | 121 |
| ST95411 | 121 |
| ST95440 | 310 |
| | |

| Article Code | Page No. |
|-----------------|-------------|
| ST95441 | 310 |
| ST95442 | 10 |
| ST96211SC | 171 |
| ST96212SC | 171 |
| ST96311SC | 171 |
| ST96312SC | 171 |
| ST96313SC | 171 |
| | 171 |
| ST96411SC | _ |
| ST96412SC | 171 |
| ST97201 | 308 |
| ST97203 | 308 |
| ST97204A | 308 |
| ST97211 | 307 |
| ST97212 | 307 |
| ST97213 | 307 |
| ST97221SC | 309 |
| ST97222SC | 309 |
| ST97301ST | 213 |
| ST97302ST | 213 |
| ST97303ST | 214 |
| ST97304ST | 215 |
| | |
| ST97305ST | 213 |
| ST97311ST | 214 |
| ST97312ST | 214 |
| ST97401ST | 294 |
| ST97403ST | 294 |
| ST97404ST | 294 |
| ST97405 | 294 |
| ST97406 | 294 |
| ST97407 | 294 |
| ST97422ST | 296 |
| ST97426ST | 296 |
| ST97427SC | 294 |
| ST97428SC | 294 |
| ST97431ME | 295 |
| ST97441ST | 295 |
| ST97451SC | |
| ST974513C | 296 |
| | 296 |
| ST97501SC | 301 |
| ST97502SC | 301 |
| ST97521ST | 187 |
| ST97701SC | 307 |
| ST97702SC | 307 |
| ST97801ASC | 291 |
| ST97802ASC | 291 |
| ST97803ASC | 291 |
| ST97804ASC | 291 |
| ST97805ASC | 291 |
| ST97807ASC | 291 |
| ST97808ASC | 291 |
| ST97809ASC | 291 |
| ST97810ASC | 291 |
| | |
| ST97813A | 292 |
| ST97817SC | 291 |



All SATA Products (unless otherwise stated) are fully warranted against manufacturing default including faulty materials and workmanship, subjected to being used for its intended purpose and allowing for fair wear and tear.

Defective tools will be repaired and/or replaced at SATA's discretion free of charge. They should be held by buyers or returned for inspection to the factory upon request.

This Lifetime Warranty does not extend to products that have been improperly used, altered, abused or repaired by others. Rustiness after usage, electroplate desquamation, surface scraped or plastic handle damage are not within warranty range. Damage in the packaging is also out of warranty range.

Warranty Information



The obvious dent or electroplate desquamation indicates that a pipe wrench or hammer (or other form of "cheater") has been abused on this ratchet. Please use a larger size of ratchet to increase the leverage of any wrench.



The obvious slippage on socket end or crack on socket wall indicates that this impact tools has been used on this socket. When you are working with impact tools, please choose impact sockets with black coat.




The breach of handle, blade chip-off and bent shanks are the results of using screwdriver as a pry bar, punch or chisel.



Distort or breach on the wrench is also result of using the wrench as a pry bar. Please use the right pry bar for prying.

| otes | |
|------|--|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

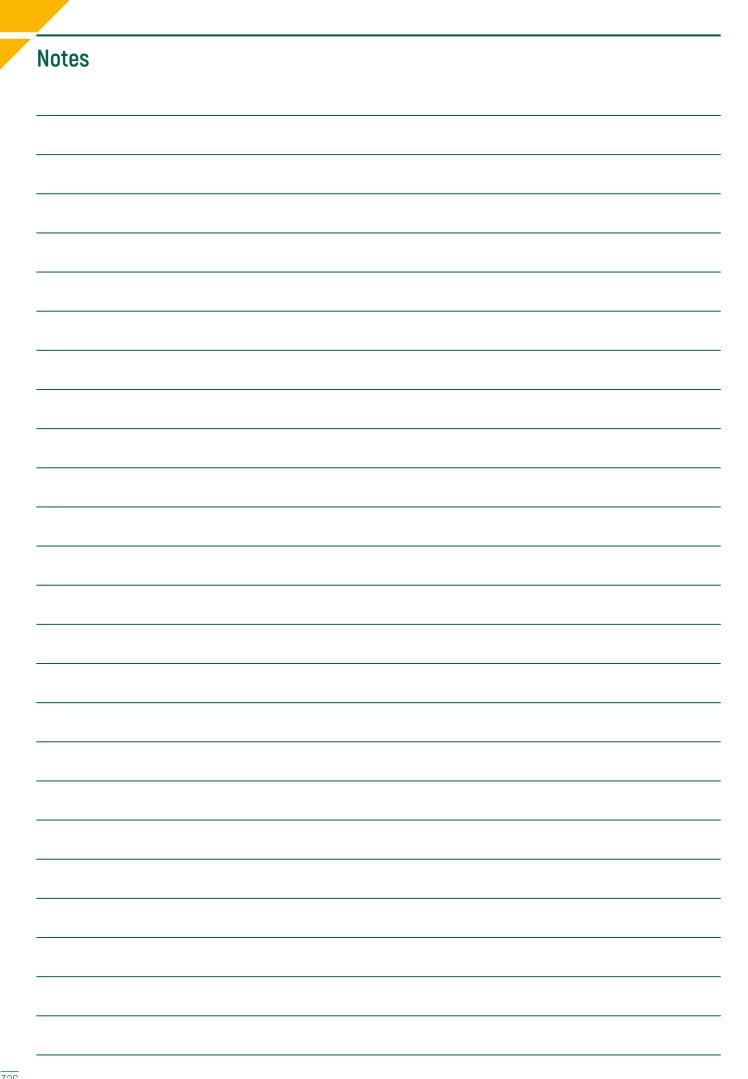

Apex Tool Group B.V.
Phileas Foggstraat 16
7821 AK Emmen
The Netherlands
T. +31 (0) 591 667 504
www.satatools.eu

Specifications subject to change without notice.

SATA is a registered trademark of Apex Brands, Inc. | © 2023

HT1100 101SATA / 01.23 BO 5.0